

**isc Silicon NPN Power Transistor**

**BDX91/93/95**

**DESCRIPTION**

- Collector Current  $-I_C = 10A$
- Collector-Emmitter Breakdown Voltage-  
 :  $V_{(BR)CEO} = 60V(\text{Min})$ - BDX91  
 80V(Min)- BDX93  
 100V(Min)- BDX95
- Complement to Type BDX92/94/96

**APPLICATIONS**



- Designed for use in general purpose power amplifier and switching applications

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )**

SYMBOL	PARAMETER	VALUE	UNIT	
$V_{CBO}$	Collector-Base Voltage	BDX91	60	V
		BDX93	80	
		BDX95	100	
$V_{CEO}$	Collector-Emmitter Voltage	BDX91	60	V
		BDX93	80	
		BDX95	100	
$V_{EBO}$	Emitter-Base Voltage	5	V	
$I_C$	Collector Current-Continuous	10	A	
$I_{CM}$	Collector Current-Peak	15	A	
$P_C$	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	90	W	
$T_J$	Junction Temperature	200	$^\circ\text{C}$	
$T_{stg}$	Storage Temperature Range	-65~200	$^\circ\text{C}$	

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.94	$^\circ\text{C/W}$

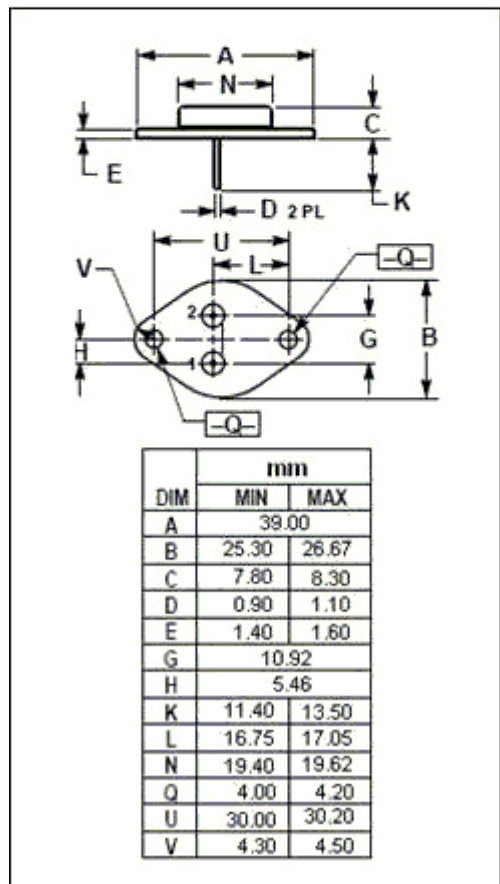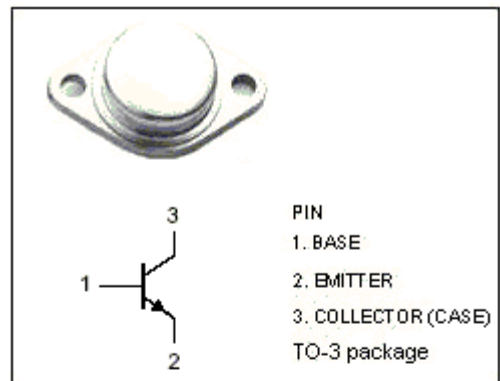

## isc Silicon NPN Power Transistor

## BDX91/93/95

## ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	BDX91	$I_C=30\text{mA}; I_B=0$	45			V
		BDX93		60			
		BDX95		80			
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage		$I_C=3\text{A}; I_B=0.3\text{A}$			0.8	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage		$I_C=5\text{A}; I_B=1\text{A}$			1.0	V
$V_{BE(sat)-1}$	Base-Emitter Saturation Voltage		$I_C=3\text{A}; I_B=0.3\text{A}$			1.5	V
$V_{BE(sat)-2}$	Base-Emitter Saturation Voltage		$I_C=5\text{A}; I_B=1\text{A}$			2.0	V
$V_{BE(on)}$	Base-Emitter On Voltage		$I_C=3\text{A}; V_{CE}=2\text{V}$			1.4	V
$I_{CBO}$	Collector Cutoff Current	BDX91	$V_{CB}=60\text{V}; I_E=0$ $V_{CB}=30\text{V}; I_E=0; T_C=150^\circ\text{C}$			0.1 2.0	mA
		BDX93	$V_{CB}=80\text{V}; I_E=0$ $V_{CB}=40\text{V}; I_E=0; T_C=150^\circ\text{C}$			0.1 2.0	
		BDX95	$V_{CB}=100\text{V}; I_E=0$ $V_{CB}=50\text{V}; I_E=0; T_C=150^\circ\text{C}$			0.1 2.0	
$I_{CEO}$	Collector Cutoff Current	BDX91	$V_{CE}=60\text{V}; I_B=0$			0.2	mA
		BDX93	$V_{CE}=80\text{V}; I_B=0$				
		BDX95	$V_{CE}=100\text{V}; I_B=0$				
$I_{EBO}$	Emitter Cutoff Current		$V_{EB}=5\text{V}; I_C=0$			0.1	mA
$h_{FE-1}$	DC Current Gain		$I_C=3\text{A}; V_{CE}=2\text{V}$	20			
$h_{FE-2}$	DC Current Gain		$I_C=5\text{A}; V_{CE}=2\text{V}$	10			
$f_T$	Current-Gain—Bandwidth Product		$I_C=1\text{A}; V_{CE}=10\text{V}$	4			MHz

## Switching times

$t_{on}$	Turn-on Time	$I_C=3\text{A}; I_{B1}=-I_{B2}=0.3\text{A}$			1.0	$\mu\text{s}$
$t_{off}$	Turn-off Time				2.0	$\mu\text{s}$