


Features

- Glass Passivated Die Construction
 - Ideally Suited for Automatic Assembly
 - Low Forward Voltage Drop, High Efficiency
 - Low Power Loss
 - Ultra-Fast Recovery Time
- Plastic Case Material has UL Flammability Classification Rating 94V-O

Mechanical Data

- Case: SMB/DO-214AA, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.093 grams (approx.)

SMB(DO-214AA)

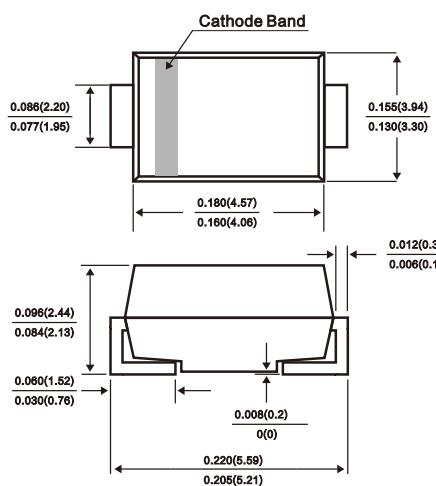

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	UF3A	UF3B	UF3D	UF3G	UF3J	UF3K	UF3M	Unit			
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V			
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V			
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V			
Maximum average forward rectified current 0.375"(9.5mm) lead length at T _A =55°C	I _(AV)	3.0							A			
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	100.0							A			
Maximum instantaneous forward voltage at 3.0A	V _F	1.0		1.30	1.70				V			
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	5.0 250.0							μA			
Maximum reverse recovery time (NOTE 1)	t _{rr}	50			75				ns			
Typical junction capacitance (NOTE 2)	C _J	75							pF			
Typical thermal resistance (NOTE 3)	R _{θJL}	15.0							°C/W			
Operating junction and storage temperature range	T _{J,T_{STG}}	-65 to +150							°C			

Note: 1.Reverse recovery condition I_F=0.5A,I_R=1.0A,I_{rr}=0.25A

2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. Thermal resistance from junction to lead and from junction to ambient with P.C.B mounted on 0.3 x 0.3" (8.0 x 8.0 mm) Copper pad area

Fig. 1 - Maximum Forward Current Derating Curve

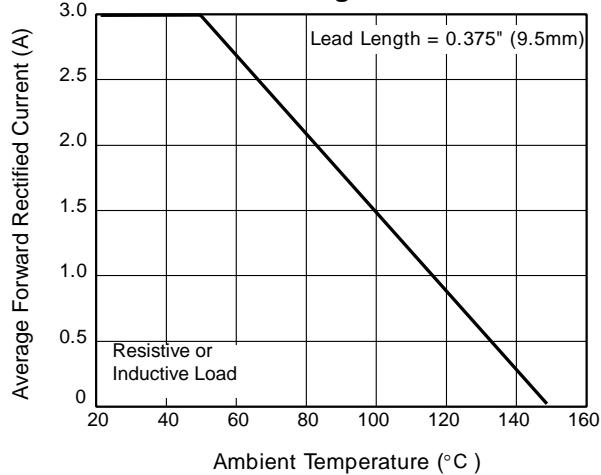


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

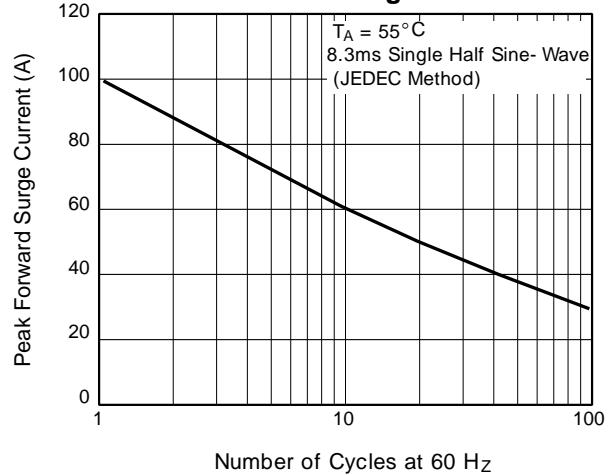


Fig. 3 - Typical Instantaneous Forward Characteristics

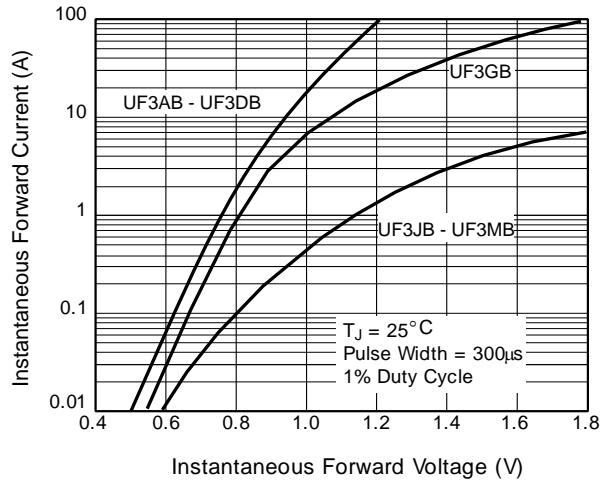


Fig. 4 - Typical Reverse Leakage Characteristics

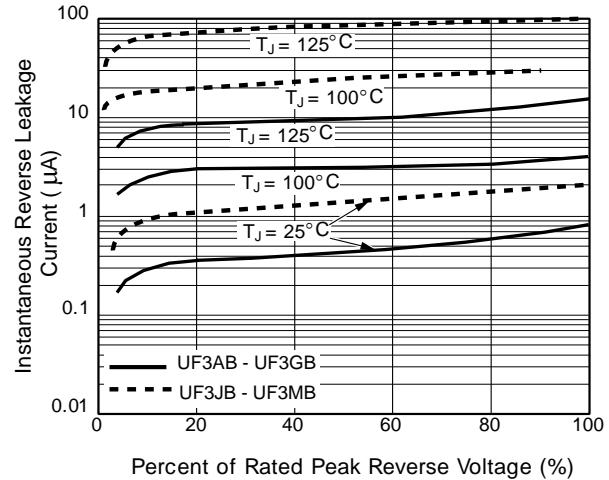


Fig. 5 - Typical Junction Capacitance

