

# International **IOR** Rectifier

47CTQ020  
47CTQ020S  
47CTQ020-1

## SCHOTTKY RECTIFIER

40 Amp




### Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	40	A
$V_{RRM}$	20	V
$I_{FSM}$ @ tp=5µs sine	1000	A
$V_F$ @20Apk, $T_J=125^\circ\text{C}$	0.34	V
$T_J$	-55 to 150	$^\circ\text{C}$

### Description/Features

This center tap Schottky rectifier has been optimized for ultra low forward voltage drop specifically for 3.3V output power supplies. The proprietary barrier technology allows for reliable operation up to 150 °C junction temperature. Typical applications are in parallel switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- 150 °C  $T_J$  operation
- Center tap configuration
- Optimized for 3.3V application
- Ultra low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance

Case Styles		
<p>47CTQ020</p>  <p>TO-220</p>	<p>47CTQ020S</p>  <p>D<sup>2</sup>PAK</p>	<p>47CTQ020-1</p>  <p>TO-262</p>

## Voltage Ratings

Part number	47CTQ020, ..020S, ..020-1		
$V_R$ Max. DC Reverse Voltage (V)	@ 125° C	20	
$V_R$ Max. DC Reverse Voltage (V)	@ 150° C	10	

## Absolute Maximum Ratings

Parameters	47CTQ	Units	Conditions	
$I_{F(AV)}$ Max. Average Forward Current (Per Device) (Per Leg)	40 20	A	50% duty cycle @ $T_C = 135^\circ\text{C}$ , rectangular waveform	
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg)	1000 250	A	5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse 10ms Sine or 6ms Rect. pulse	Following any rated load condition and with rated $V_{RRM}$ applied
$E_{AS}$ Non-Repetitive Avalanche Energy (Per Leg)	18	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 3$ Amps, $L = 3$ mH	
$I_{AR}$ Repetitive Avalanche Current (Per Leg)	3	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical	

## Electrical Specifications

Parameters	47CTQ	Units	Conditions		
$V_{FM}$ Max. Forward Voltage Drop (Per Leg) (1)	0.45	V	@ 20A	$T_J = 25^\circ\text{C}$	
	0.51	V	@ 40A		
	0.34	V	@ 20A	$T_J = 125^\circ\text{C}$	
	0.44	V	@ 40A		
	0.31	V	@ 20A	$T_J = 150^\circ\text{C}$	
	0.42	V	@ 40A		
$I_{RM}$ Max. Reverse Leakage Current (Per Leg) (1)	3	mA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_R$	
	310	mA	$T_J = 125^\circ\text{C}$		
	60	mA	$T_J = 125^\circ\text{C}$		$V_R = 5\text{V}$
	45	mA	$T_J = 125^\circ\text{C}$		$V_R = 3.3\text{V}$
	306	mA	$T_J = 150^\circ\text{C}$		$V_R = 10\text{V}$
$V_{F(TO)}$ Threshold Voltage	0.188	V	$T_J = T_J \text{ max.}$		
$r_t$ Forward Slope Resistance	5.9	m $\Omega$			
$C_T$ Max. Junction Capacitance (Per Leg)	3000	pF	$V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$		
$L_S$ Typical Series Inductance (Per Leg)	5.5	nH	Measured lead to lead 5mm from package body		
dv/dt Max. Voltage Rate of Change (Rated $V_R$ )	10,000	V/ $\mu\text{s}$			

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle <2%

## Thermal-Mechanical Specifications

Parameters	47CTQ	Units	Conditions	
$T_J$ Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$		
$T_{stg}$ Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$		
$R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Leg)	1.5	$^\circ\text{C}/\text{W}$	DC operation	
$R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Package)	0.75	$^\circ\text{C}/\text{W}$	DC operation	
$R_{thCS}$ Typical Thermal Resistance, Case to Heatsink	0.50	$^\circ\text{C}/\text{W}$	Mounting surface, smooth and greased (only for TO-220)	
wt Approximate Weight	2(0.07)	g(oz.)		
T Mounting Torque	Min.	6(5)	Kg-cm (lbf-in)	
	Max.	12(10)		

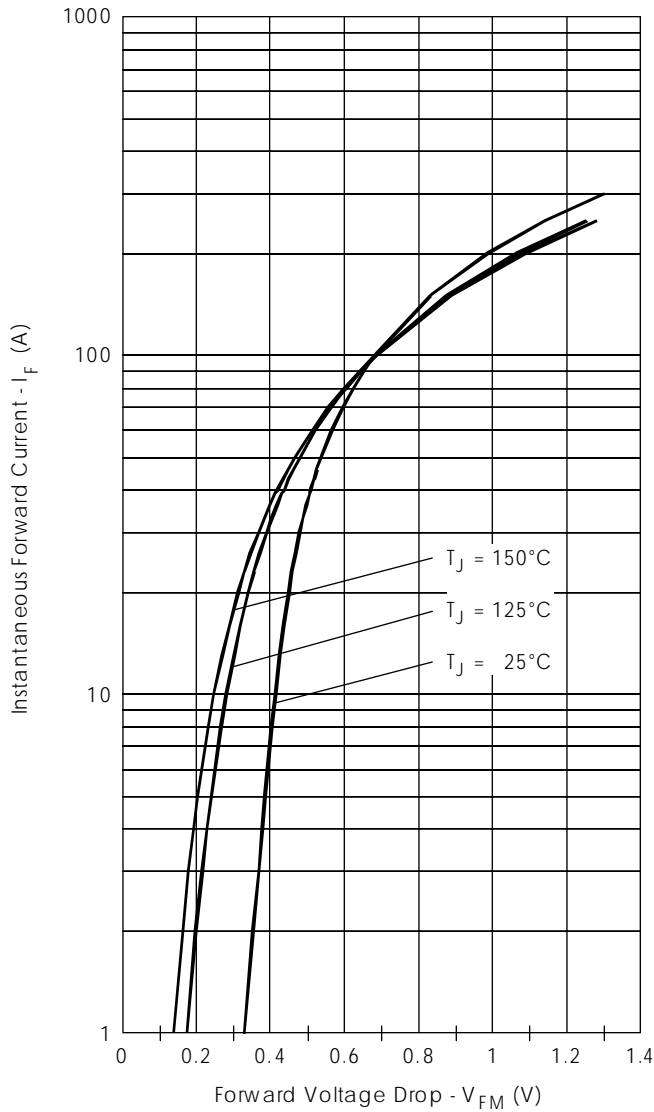


Fig. 1 - Max. Forward Voltage Drop Characteristics (PerLeg)

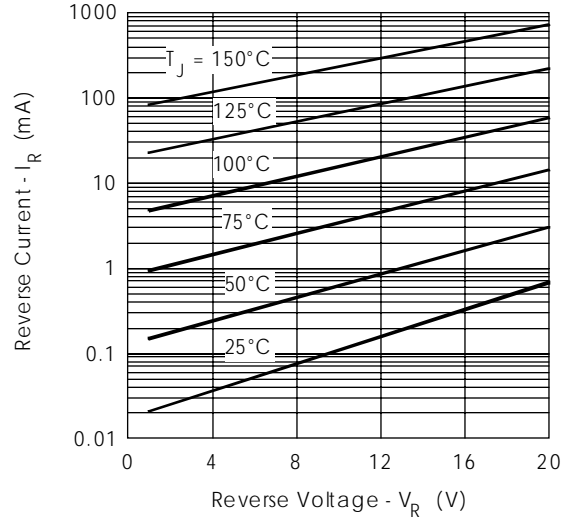


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (PerLeg)

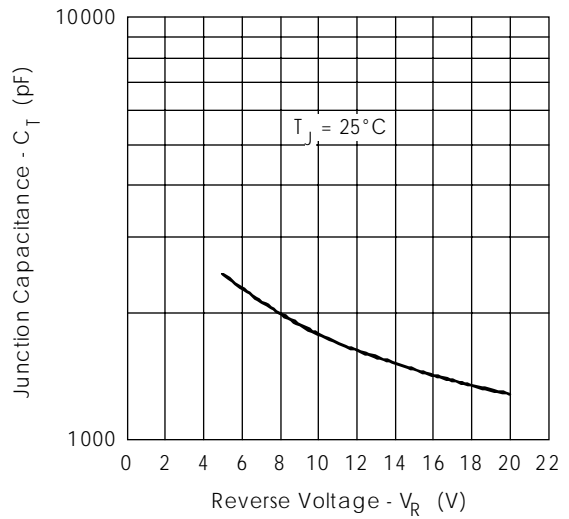


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (PerLeg)

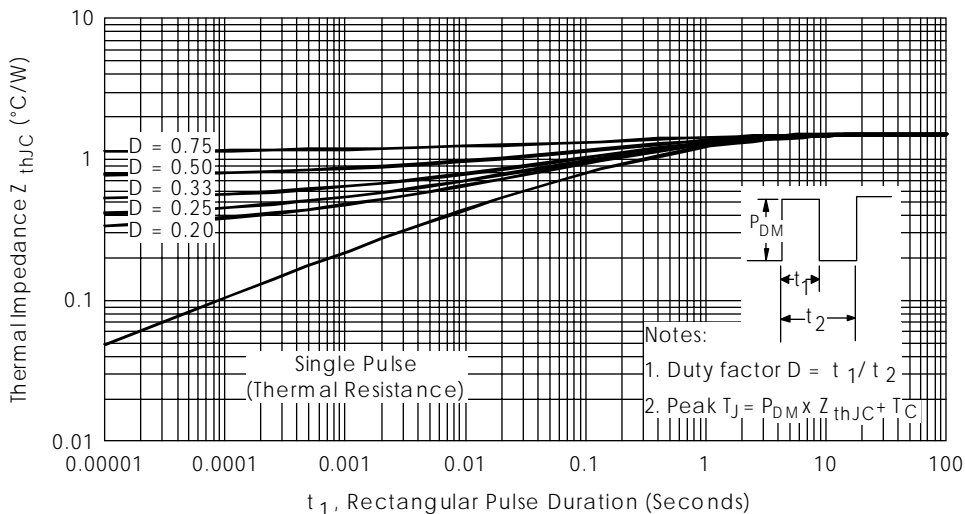


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

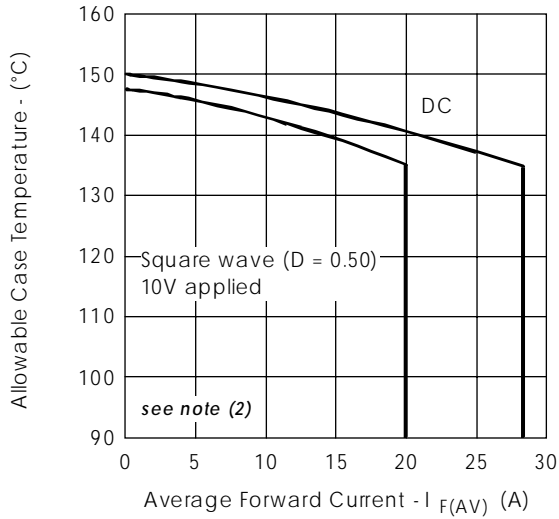


Fig. 5- Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

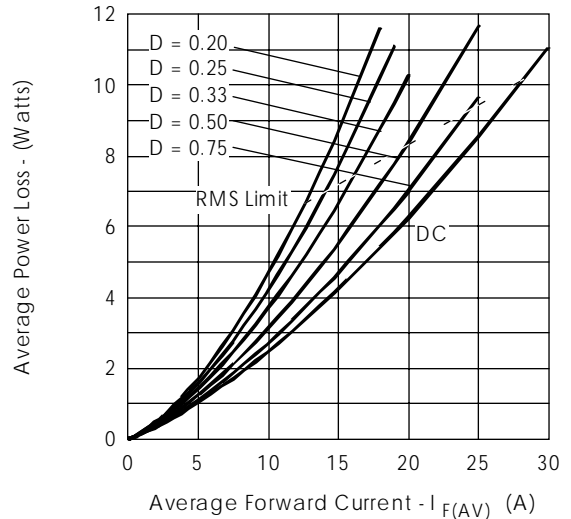


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

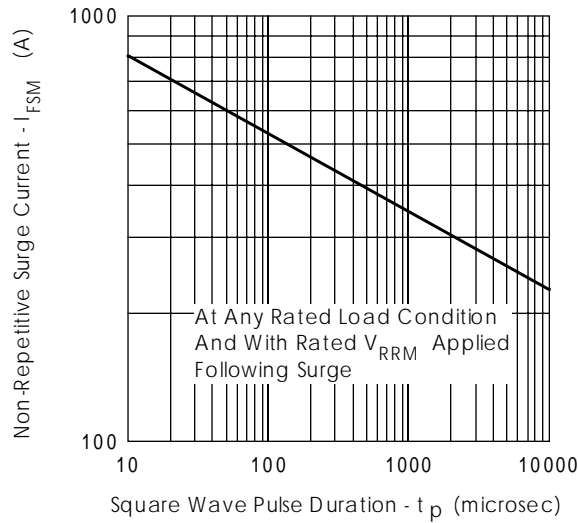


Fig. 7- Max. Non-Repetitive Surge Current (Per Leg)

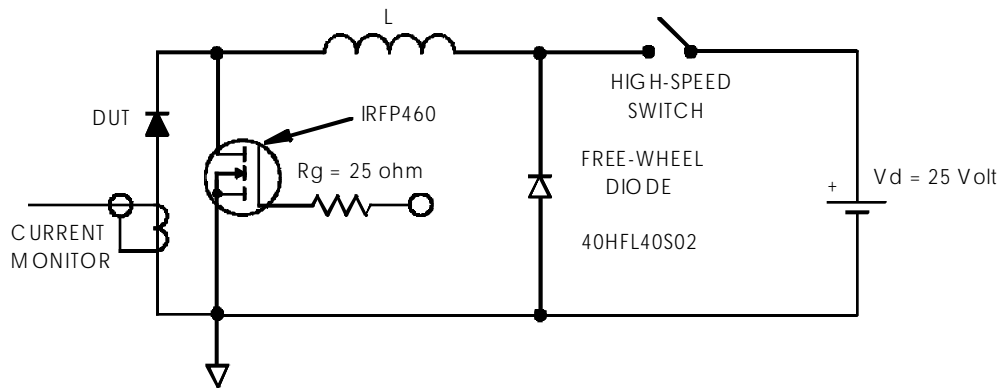


Fig. 8- Unclamped Inductive Test Circuit

(2) Formula used:  $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ;

$Pd$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$Pd_{REV}$  = Inverse Power Loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1} = 10$  V

### Ordering Information Table

**Device Code**


47	C	T	Q	020	-1
①	②	③	④	⑤	⑥

- 1** - Essential Part Number
- 2** - C = Common Cathode
- 3** - T = TO-220
- 4** - Q = Schottky Q Series
- 5** - Voltage Rating 020 = 20V
- 6** - -1 = TO-262  
S = D<sup>2</sup>Pak


### Outline Table

**Conform to JEDEC outline TO-220AB**  
Dimensions in millimeters and (inches)


Outline Table

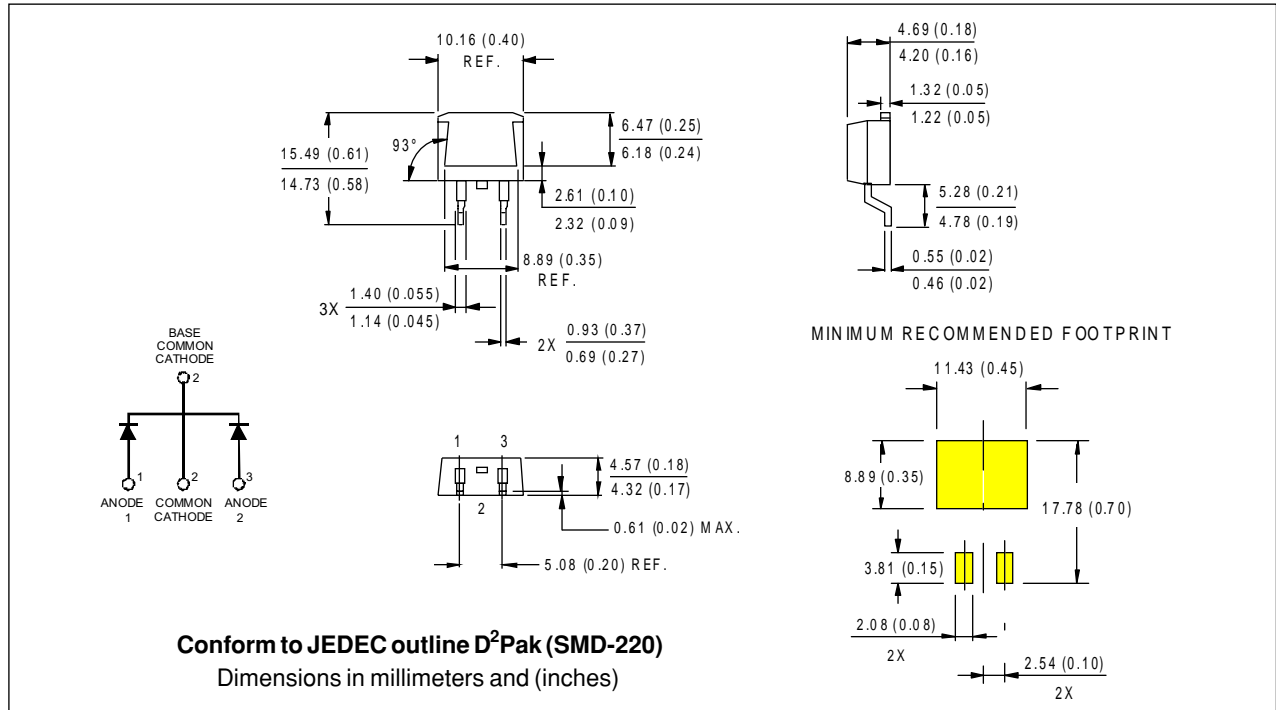

Tape & Reel Information

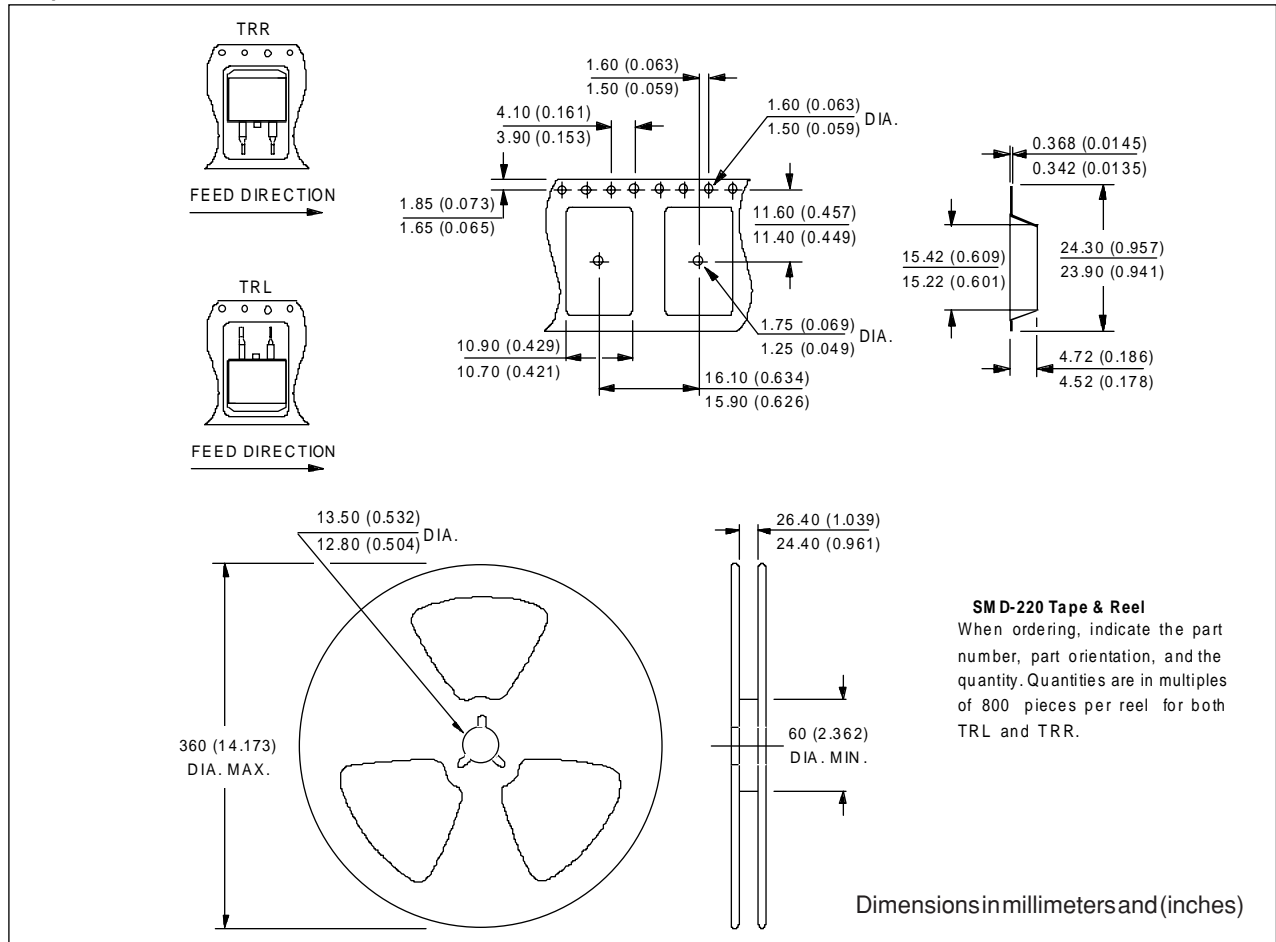

Outline Table

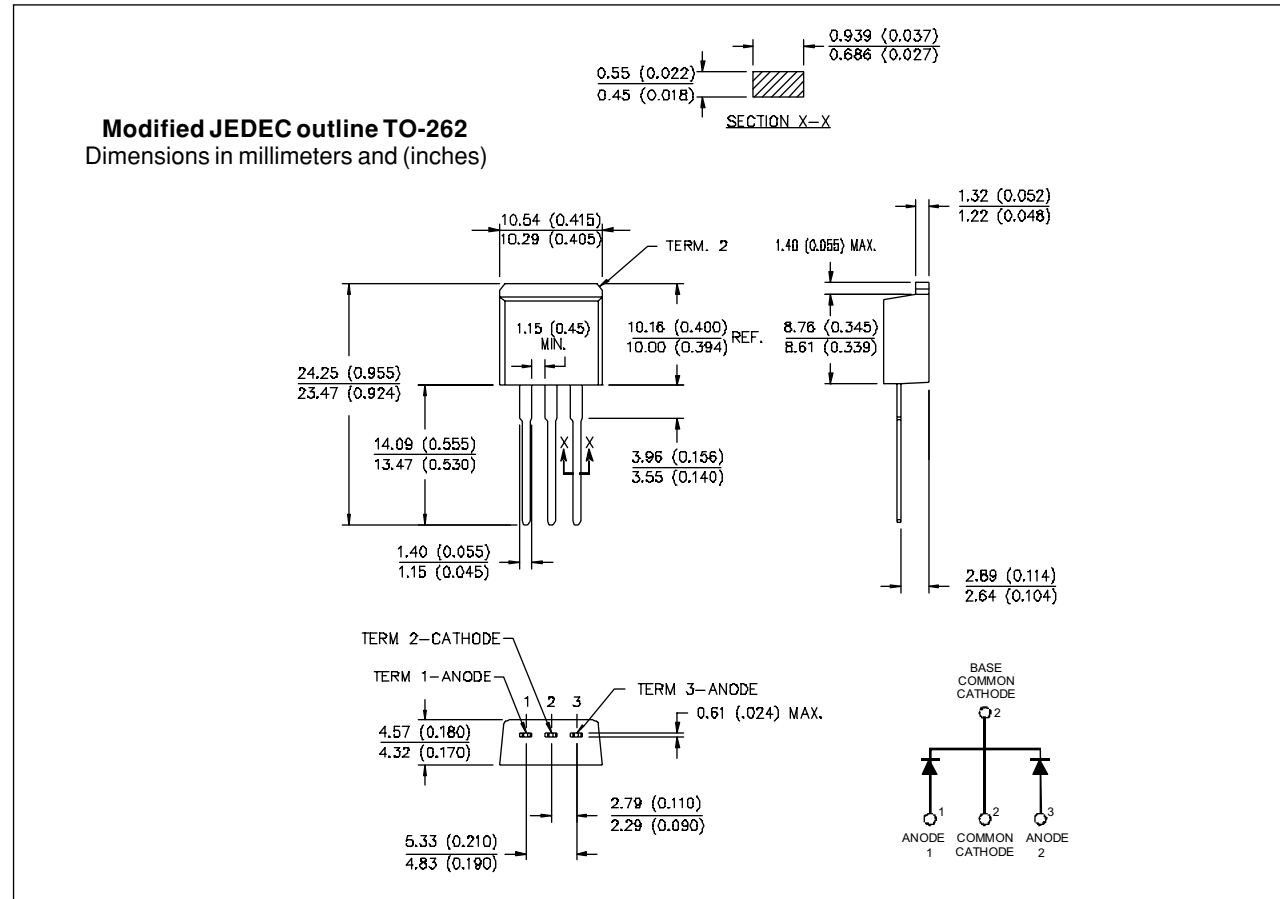

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.