





VOLTAGE RANGE: 20 - 100V

CURRENT: 1.0 A

Features

- Schottky Barrier Chip
- Ideally Suited for Automatic Assembly
- Low Power Loss, High Efficiency
- For Use in Low Voltage Application
- Guard Ring Die Construction
- Plastic Case Material has UL Flammability Classification Rating 94V-0



SOD-123FL			
Dim	Min	Max	Typ
A	3.58	3.72	3.65
B	2.72	2.78	2.75
C	1.77	1.83	1.80
D	1.02	1.08	1.05
E	0.097	1.03	1.00
H	0.13	0.17	0.15
L	0.53	0.57	0.55
All Dimensions in mm			

Mechanical Data

- Case: SOD-123FL
plastic body over passivated junction
- Terminals: Plated axial leads,
- solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.0007 ounce, 0.02 grams



Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	B120L	B130L	B140L	B150L	B160L	B180L	B190L	B1100L	Unit	
Peak Repetitive Reverse Voltage	V _{RRM}	20	30	40	50	60	80	90	100	V	
Working Peak Reverse Voltage	V _{RWM}										
DC Blocking Voltage	V _R										
RMS Reverse Voltage	V _{R(RMS)}	14	21	28	35	42	56	64	71	V	
Average Rectified Output Current @T _L = 75°C	I _d	1.0								A	
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	30								A	
Forward Voltage @I _F = 1.0A	V _{FM}	0.50			0.70		0.85			V	
Peak Reverse Current @T _A = 25°C	I _{RM}	0.5								mA	
At Rated DC Blocking Voltage @T _A = 100°C		20									
Typical Thermal Resistance (Note 1)	R _{θJL} R _{θJA}					28 88					°C/W
Operating Temperature Range	T _j	-65 to +125								°C	
Storage Temperature Range	T _{stg}	-65 to +150								°C	

Note: 1. Mounted on P.C. Board with 5.0mm² copper pad area.

RATINGS AND CHARACTERISTIC CURVES B120L THRU B1100L

AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

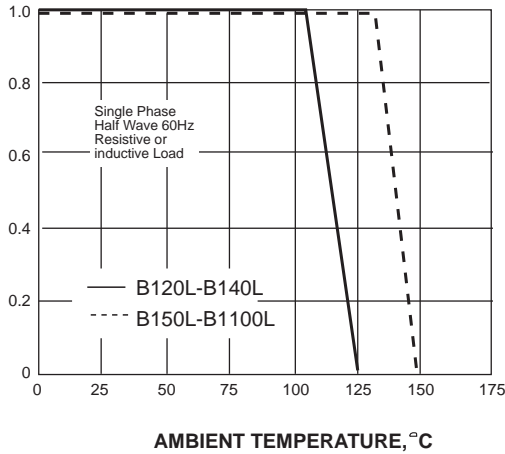


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

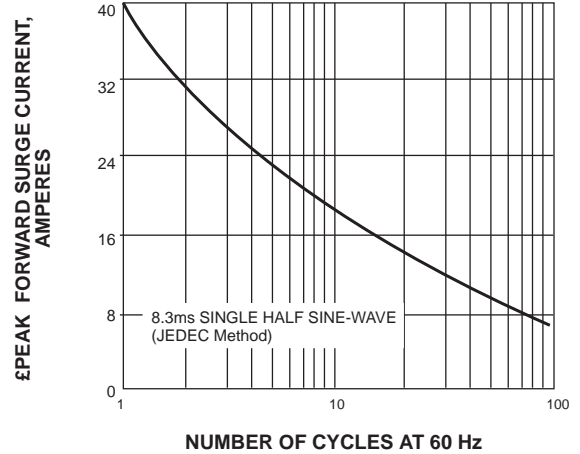


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

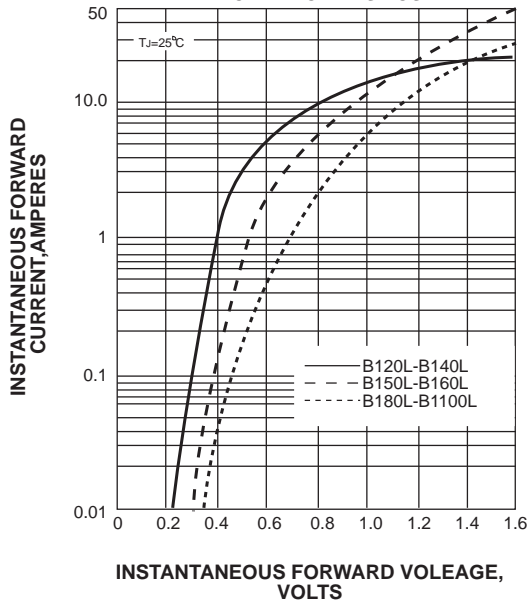


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

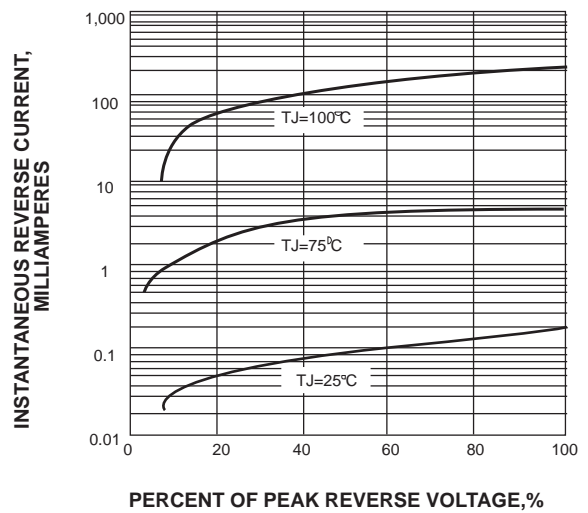


FIG. 5-TYPICAL JUNCTION CAPACITANCE

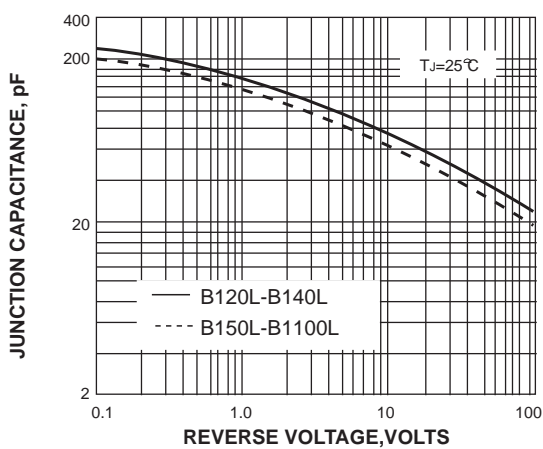


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

