

塑封外延型快恢复整流二极管

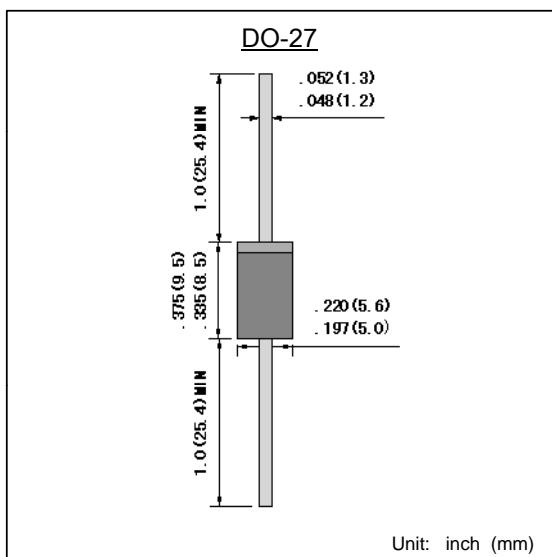
反向电压 200 ~ 600 V

正向电流 4.0 A

Plastic Epitaxial Fast Recovery Rectifiers

Reverse Voltage 200 ~ 600V

Forward Current 4.0 A

**特征 Features**

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 玻璃钝化芯片 Glass passivated chip
- 高温焊接保证 High temperature soldering guaranteed:  
260°C/10 秒, 引线长度:0.375" (9.5mm)
- 260°C/10seconds, 9.5mm lead length
- 引线和管体皆符合RoHS标准  
Lead and body according with RoHS standard
- 型号后缀“-F”标记无卤素产品  
Green compound with suffix "-F" on Marking

**机械数据 Mechanical Data**

- 封装外形:DO-27 塑封 Case:DO-27 Molded plastic
- 环氧树脂 : UL易燃等级 : 94V-0  
Epoxy: UL 94V-0 rate flame retardant
- 引脚 : 镀锡,无铅 Lead: Pure tin plated, lead free

**极限值和温度特性 TA = 25°C 除非另有规定。**

Maximum Ratings &amp; Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	MUR420G	MUR430G	MUR440G	MUR460G	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	200	300	400	600	V
最大均方根电压 Maximum RMS voltage	V <sub>RMS</sub>	140	210	280	420	V
最大直流阻断电压 Maximum DC blocking voltage	V <sub>DC</sub>	200	300	400	600	V
最大正向平均整流电流 Maximum average forward rectified current	I <sub>F(AV)</sub>			4.0		A
正向不重复浪涌电流 8.3 ms 单一正弦半波 Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave	I <sub>FSM</sub>	125		110		A
典型热阻 Typical thermal resistance (Note 1)	R <sub>θJA</sub>		25			°C/W
工作结温 Operating junction temperature	T <sub>J</sub>		150			°C
存储温度 Storage temperature range	T <sub>STG</sub>		-55 --- +150			°C

备注 Note:

1) 引线长度 0.375" (9.5 mm) , 安装在PCB板上 , 从PN结到周围环境的热阻。

1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, PCB mounted.

**电特性 TA = 25°C 除非另有规定。**

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	MUR420G	MUR430G	MUR440G	MUR460G	单位 Unit
最大正向电压 @IF=4.0A Maximum forward voltage	V <sub>F</sub>	0.89		1.28		V
最大反向电流 @V <sub>DC</sub> TA= 25°C Maximum reverse current	I <sub>R</sub>		5			μA
最大反向恢复时间 IF=0.5A , IR=1.0A , IRR=0.25A MAX. reverse recovery time	T <sub>rr</sub>	25		50		ns

## 特性曲线 Characteristic Curves

