


P0425AI


N-Channel Enhancement Mode MOSFET

PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
250V	$0.8\ \Omega @ V_{GS} = 10V$	4A

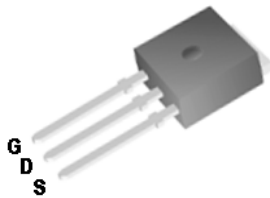

TO-251



ABSOLUTE MAXIMUM RATINGS ($T_A = 25\ ^\circ C$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current	$T_C = 25\ ^\circ C$	I_D	4	A
	$T_C = 100\ ^\circ C$		3	
Pulsed Drain Current ¹		I_{DM}	16	
Avalanche Current		I_{AS}	4	
Avalanche Energy	$L = 7.7mH$	E_{AS}	60	mJ
Power Dissipation	$T_C = 25\ ^\circ C$	P_D	69	W
	$T_C = 100\ ^\circ C$		27	
Operating Junction & Storage Temperature Range		T_J, T_{STG}	-55 to 150	$^\circ C$

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Case	$R_{\theta JC}$		1.8	$^\circ C / W$
Junction-to-Ambient	$R_{\theta JA}$		50	

¹Pulse width limited by maximum junction temperature.

P0425AI

N-Channel Enhancement Mode MOSFET


PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	250			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2	2.8	4	V
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 20V$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 250V, V_{GS} = 0V$			1	μA
		$V_{DS} = 200V, V_{GS} = 0V, T_J = 125^\circ C$			10	
Drain-Source On-State Resistance ¹	$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 2A$		0.6	0.8	Ω
Forward Transconductance ¹	g_{fs}	$V_{DS} = 10V, I_D = 4A$		10		S
DYNAMIC						
Input Capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = 25V, f = 1MHz$		512		pF
Output Capacitance	C_{oss}			72		
Reverse Transfer Capacitance	C_{rss}			19		
Total Gate Charge ²	Q_g	$V_{DD} = 200V, I_D = 4A, V_{GS} = 10V$		18		nC
Gate-Source Charge ²	Q_{gs}			2		
Gate-Drain Charge ²	Q_{gd}			8		
Turn-On Delay Time ²	$t_{d(on)}$	$V_{DD} = 125V, I_D \cong 2A,$ $V_{GS} = 10V, R_{GS} = 6\Omega$		30		nS
Rise Time ²	t_r			210		
Turn-Off Delay Time ²	$t_{d(off)}$			61		
Fall Time ²	t_f			105		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ($T_J = 25^\circ C$)						
Continuous Current	I_S				4	A
Forward Voltage ¹	V_{SD}	$I_F = 2A, V_{GS} = 0V$			1.6	V
Reverse Recovery Time	t_{rr}	$I_F = 4A, di_F/dt = 100A / \mu S$		103		nS
Reverse Recovery Charge	Q_{rr}				370	

¹Pulse test : Pulse Width $\leq 300 \mu sec$, Duty Cycle $\leq 2\%$.

²Independent of operating temperature.

P0425AI


N-Channel Enhancement Mode MOSFET

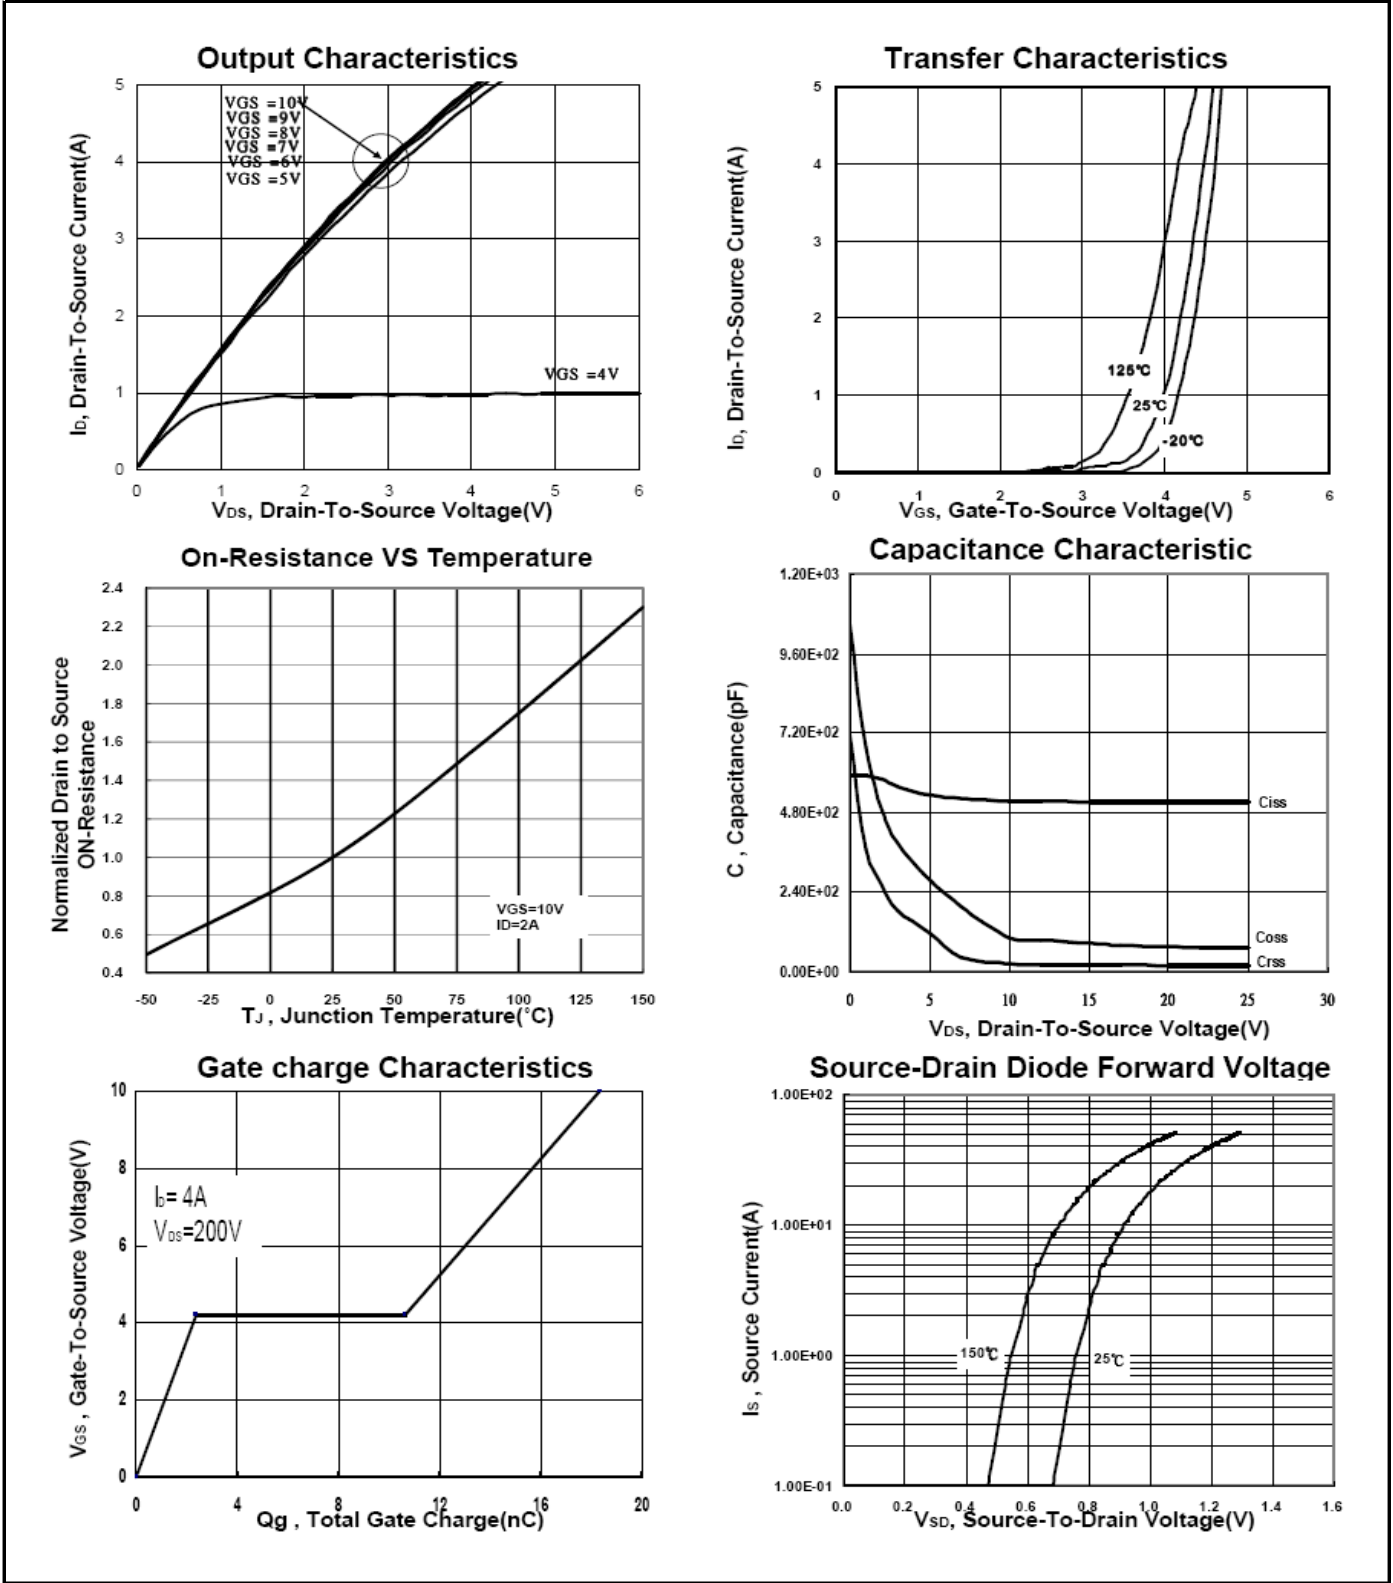


P0425AI

N-Channel Enhancement Mode MOSFET


Safe Operating Area

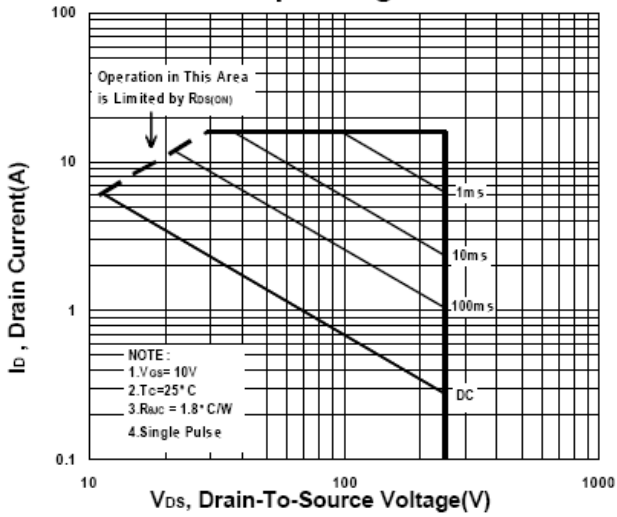

Single Pulse Maximum Power Dissipation

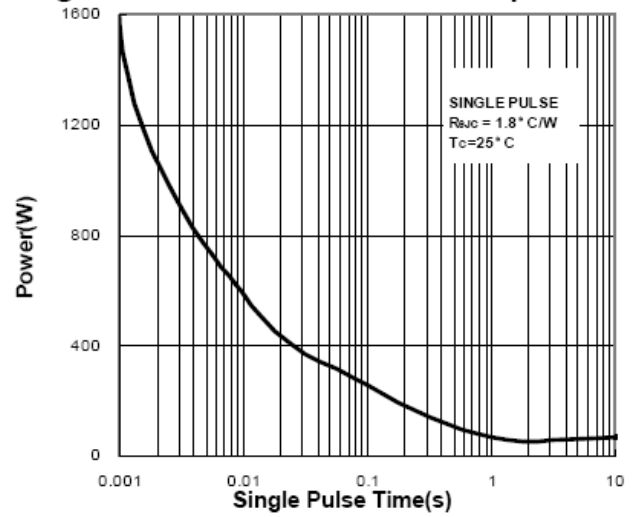

Transient Thermal Response Curve

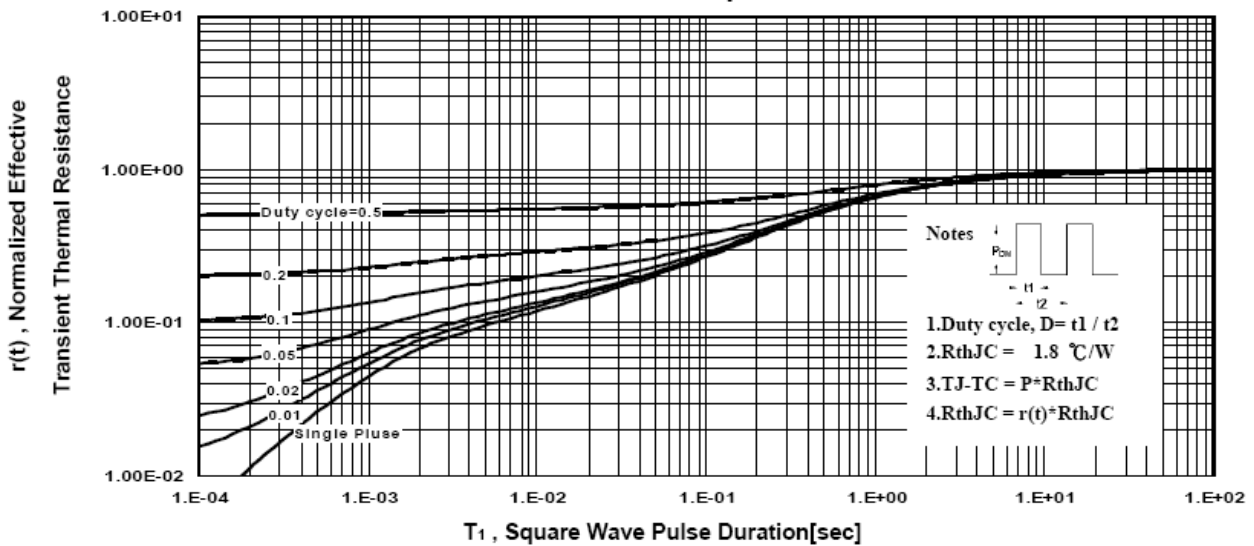

P0425AI

N-Channel Enhancement Mode MOSFET

Package Dimension

TO-251 MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	14	15	17.14	H	0.89		1.7
B	2.1	2.3	2.5	I	6.3		6.8
C	0.4	0.5	0.6	J	4.8		5.5
D	0.35	0.5	0.65	K	0.5	0.84	1.14
E	0.9	1.1	1.5	L	0.4	0.76	0.912
F	7		9.65	M		2.3	
G	5.3		6.22	N	1.4	2.16	2.23

