
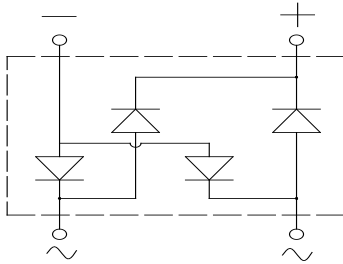


Bridge Rectifiers

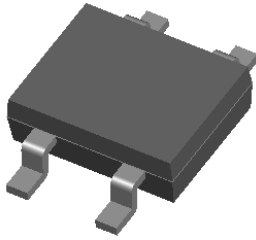

Features

- UL recognition, file #E313149
- Ideal for automated placement
- High surge current capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

General purpose use in AC/DC bridge full wave rectification for power supply, lighting ballast, battery charger, home appliances, office equipment, and telecommunication applications.

Mechanical Data

- **Package:** MBLS
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MB1F	MB2F	MB4F	MB6F	MB8F	MB10F
Device marking code			MB1F	MB2F	MB4F	MB6F	MB8F	MB10F
Repetitive peak reverse voltage	VRRM	V	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, R-load, $T_a=40^\circ\text{C}$	On alumina substrate	I_o	A	0.8				
	On glass-epoxy substrate			0.5				
Surge(non-repetitive)forward current @60Hz half sine wave, 1 cycle, $T_j=25^\circ\text{C}$	IFSM	A	30					
Current squared time @ $1\text{ms} \leq t \leq 8.3\text{ms}$, $T_j=25^\circ\text{C}$, rating of per diode	I^2t	A^2s	3.7					
Storage temperature	T_{stg}	$^\circ\text{C}$	-55 ~ +150					
Junction temperature	T_j	$^\circ\text{C}$	-55 ~ +150					

■ Electrical Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MB1F	MB2F	MB4F	MB6F	MB8F	MB10F
Maximum instantaneous forward voltage drop per diode	V_F	V	$I_{FM}=0.4\text{A}$	1.0					
Maximum DC reverse current at rated DC blocking voltage per diode	I_{RRM}	μA	$V_{RM}=V_{RRM}$	5					



MB1F THRU MB10F





■ Thermal Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	MB1F	MB2F	MB4F	MB6F	MB8F	MB10F
Thermal Resistance	Between junction and ambient, On alumina substrate	$R_{\theta J-A}$	$^\circ\text{C/W}$	76					
	Between junction and ambient, On glass-epoxi substrate	$R_{\theta J-A}$		134					
	Between junction and lead	$R_{\theta J-L}$		20					

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MB1F-MB10F	F1	Approximate 0.083	4000	8000	64000	13' reel


■ Characteristics (Typical)

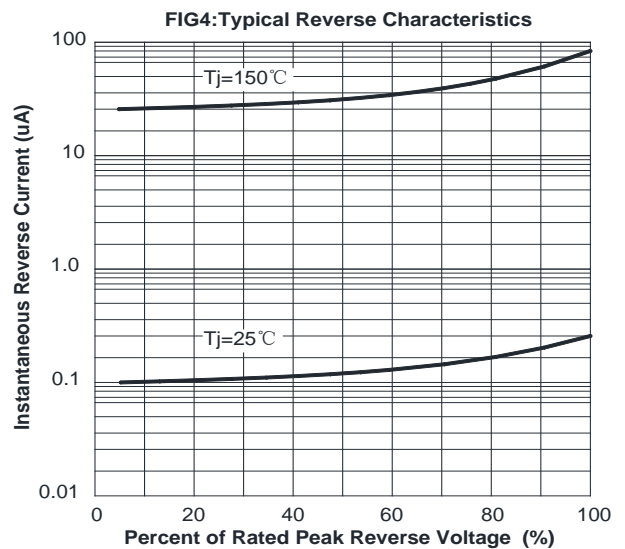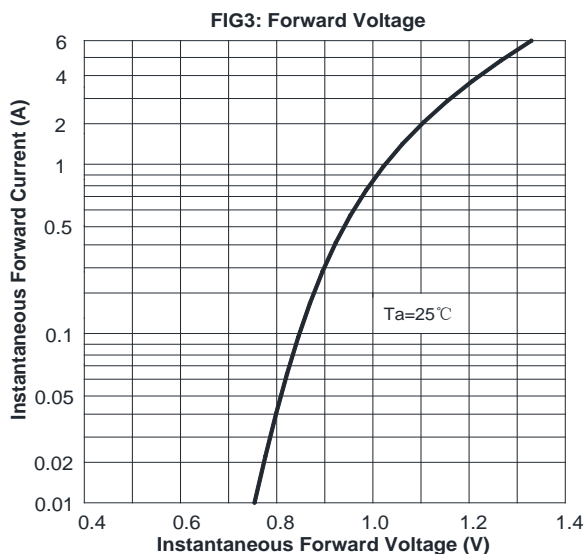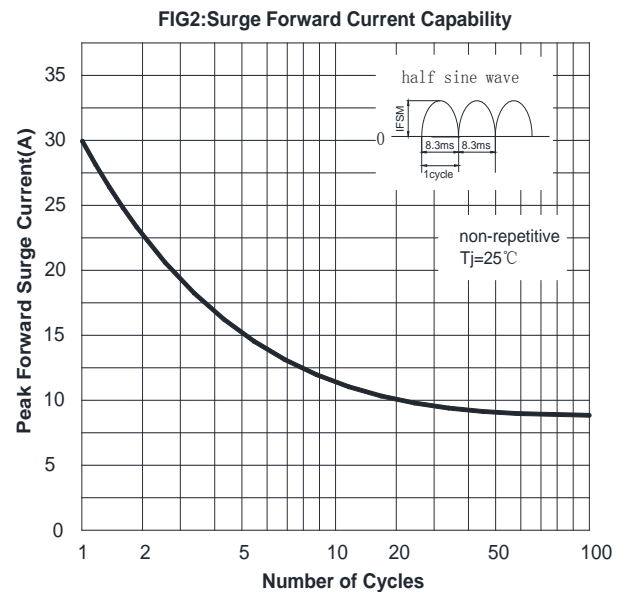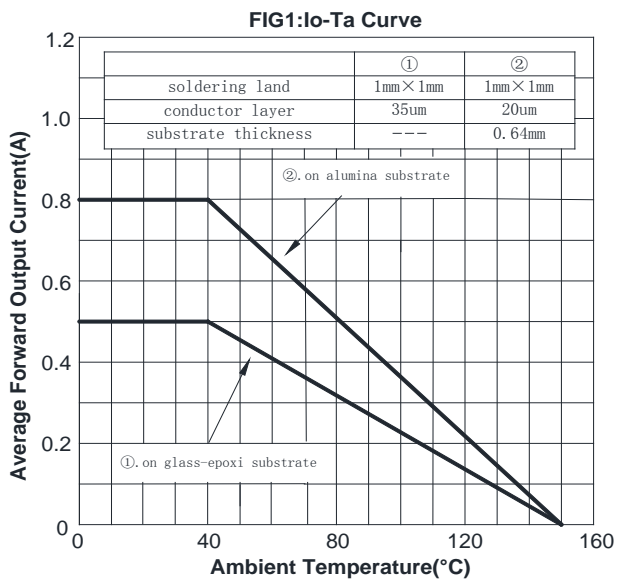




MB1F THRU MB10F

■ Outline Dimensions

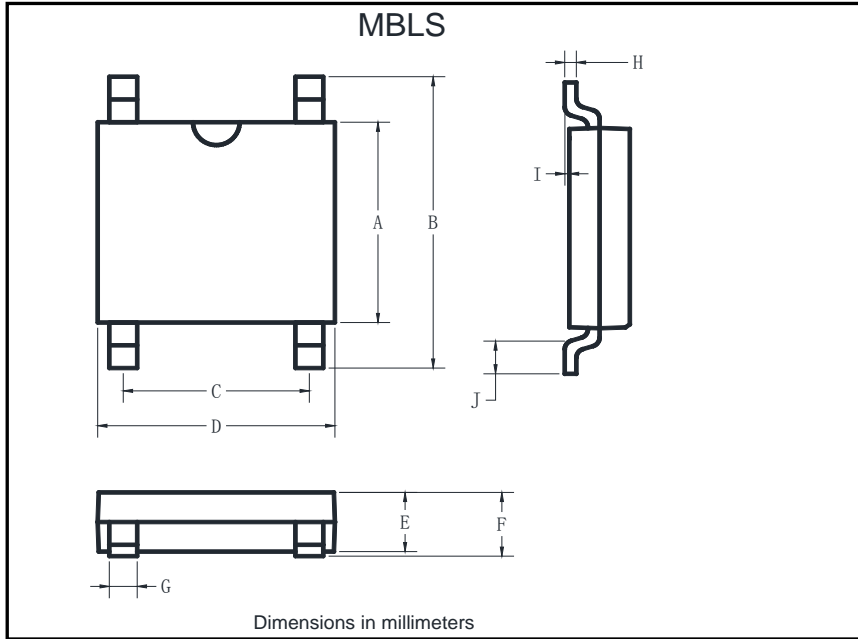

MBLS		
Dim	Min	Max
A	3.60	4.00
B	6.40	7.00
C	2.20	2.60
D	4.50	4.90
E	1.30	1.50
F	1.40	1.60
G	0.56	0.84
H	0.15	0.35
I	0.20Max	
J	0.70	1.10

■ Suggested pad layout

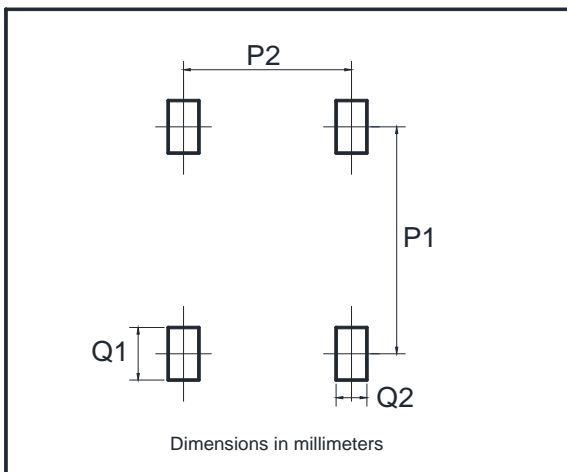

Dim	Min
P1	6.00
P2	2.40
Q1	1.84
Q2	1.20



MB1F THRU MB10F

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.