


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES

- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Packing Density.

EQUIVALENT CIRCUIT



BIAS RESISTOR VALUES


TYPE NO.	R1(kΩ)	R2(kΩ)
KRA751U	4.7	4.7
KRA752U	10	10
KRA753U	22	22
KRA754U	47	47
KRA755U	2.2	47
KRA756U	4.7	47

DIM	MILLIMETERS
A	2.00±0.20
A1	1.3±0.1
B	2.1±0.1
B1	1.25±0.1
C	0.65
D	0.2+0.10/-0.05
G	0-0.1
H	0.9±0.1
T	0.15+0.1/-0.05

1. Q₁ COMMON (EMITTER)
2. Q₁ IN (BASE)
3. Q₂ OUT (COLLECTOR)
4. Q₂ COMMON (EMITTER)
5. Q₂ IN (BASE)
6. Q₁ OUT (COLLECTOR)

US6

EQUIVALENT CIRCUIT (TOP VIEW)



MAXIMUM RATING (Ta=25°C)


CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRA751U~756U	V _O	-50	V
Input Voltage	KRA751U	V _I	-20, 10	V
	KRA752U		-30, 10	
	KRA753U		-40, 10	
	KRA754U		-40, 10	
	KRA755U		-12, 5	
	KRA756U		-20, 5	
Output Current	KRA751U~756U	I _O	-100	mA
Power Dissipation		P _D *	200	mW
Junction Temperature		T _j	150	°C
Storage Temperature Range		T _{stg}	-55 ~ 150	°C

* Total Rating.

MARK SPEC

TYPE	KRA751U	KRA752U	KRA753U	KRA754U	KRA755U	KRA756U
MARK	PA	PB	PC	PD	PE	PF

Marking



Type Name

KRA751U~KRA756U

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRA751U ~ 756U	$I_{O(OFF)}$	$V_O=-50V, V_I=0$	-	-	-500	nA
DC Current Gain	KRA751U	G_I	$V_O=-5V, I_O=-10mA$	30	55	-	
	KRA752U			50	80	-	
	KRA753U			70	120	-	
	KRA754U			80	200	-	
	KRA755U			80	200	-	
	KRA756U			80	200	-	
Output Voltage	KRA751U ~ 756U	$V_{O(ON)}$	$I_O=-10mA, I_I=-0.5mA$	-	-0.1	-0.3	V
Input Voltage (ON)	KRA751U	$V_{I(ON)}$	$V_O=-0.2V, I_O=-5mA$	-	-1.5	-2.0	V
	KRA752U			-	-1.8	-2.4	
	KRA753U			-	-2.1	-3.0	
	KRA754U			-	-2.8	-5.0	
	KRA755U			-	-0.8	-1.1	
	KRA756U			-	-0.9	-1.3	
Input Voltage (OFF)	KRA751U ~ 754U	$V_{I(OFF)}$	$V_O=-5V, I_O=-0.1mA$	-1.0	-1.2	-	V
	KRA755U ~ 756U			-0.5	-0.65	-	
Transition Frequency	KRA751U ~ 756U	f_T^*	$V_O=-10V, I_O=-5mA$	-	200	-	MHz
Input Current	KRA751U	I_I	$V_I=-5V$	-	-	-1.8	mA
	KRA752U			-	-	-0.88	
	KRA753U			-	-	-0.36	
	KRA754U			-	-	-0.18	
	KRA755U			-	-	-3.6	
	KRA756U			-	-	-1.8	







Note : * Characteristic of Transistor Only.

KRA751U~KRA756U







ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC			SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRA751U	t_r	$V_O=-5V$ $V_{IN}=-5V$ $R_L=1k\Omega$	-	0.07	-	μS
		KRA752U			-	0.06	-	
		KRA753U			-	0.2	-	
		KRA754U			-	0.24	-	
		KRA755U			-	0.02	-	
		KRA756U			-	0.07	-	
	Storage Time	KRA751U	t_{stg}		-	1.1	-	
		KRA752U			-	1.1	-	
		KRA753U			-	1.1	-	
		KRA754U			-	1.1	-	
		KRA755U			-	1.1	-	
		KRA756U			-	1.1	-	
	Fall Time	KRA751U	t_f		-	0.15	-	
		KRA752U			-	0.24	-	
		KRA753U			-	0.38	-	
		KRA754U			-	0.63	-	
		KRA755U			-	0.1	-	
		KRA756U			-	0.2	-	







KRA751U~KRA756U

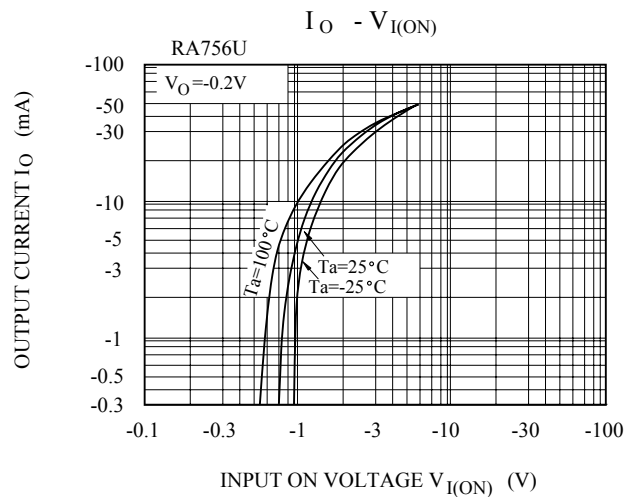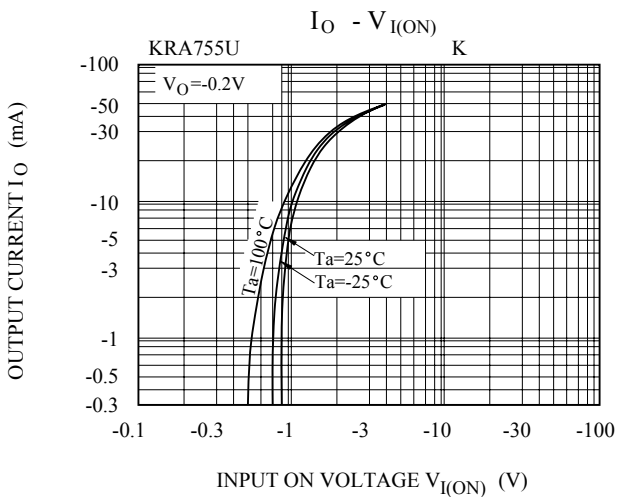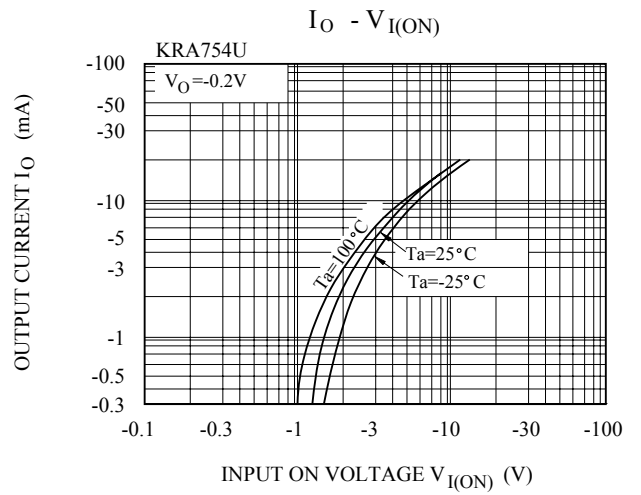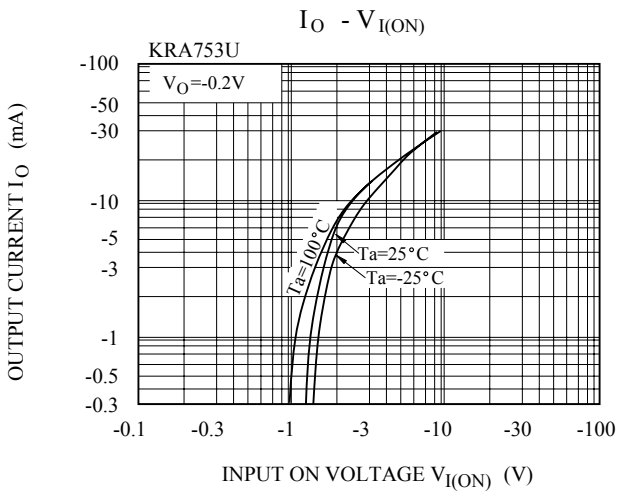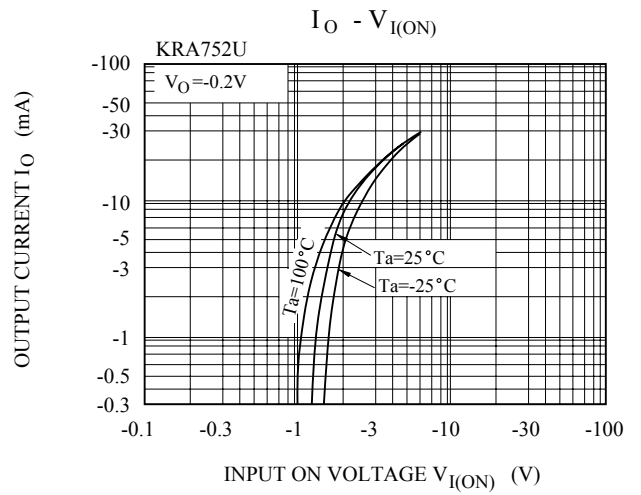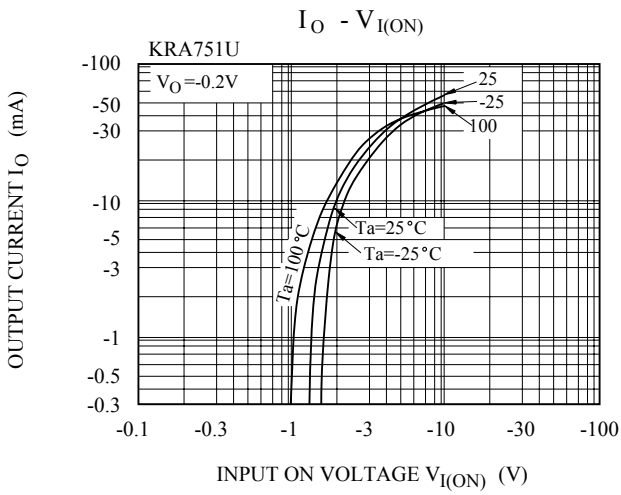

KRA751U~KRA756U

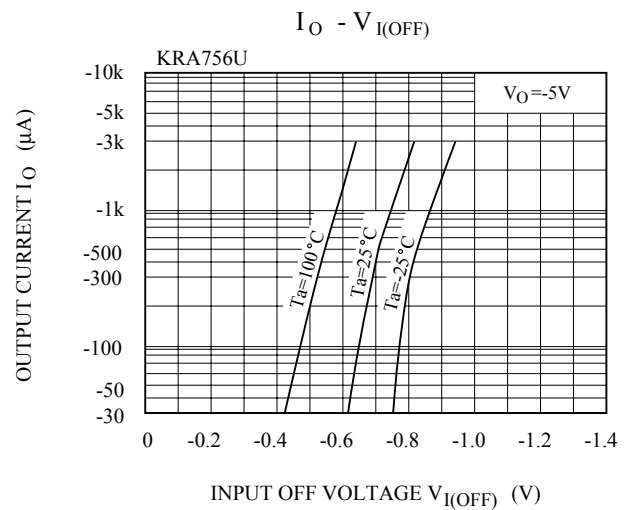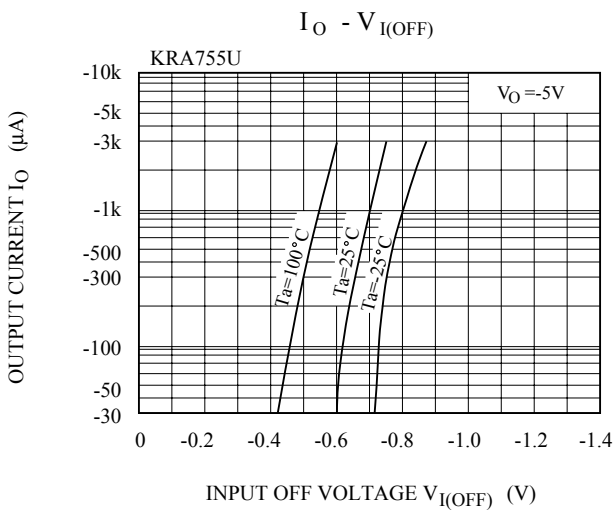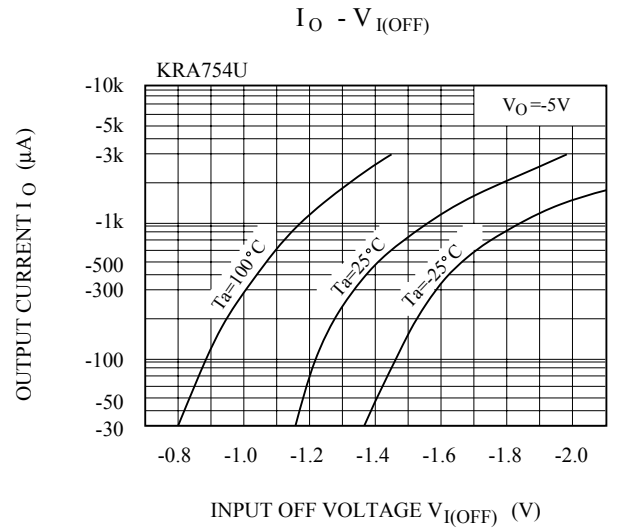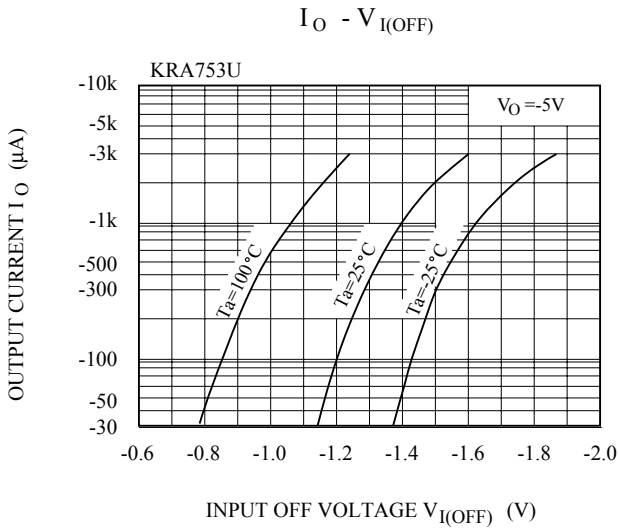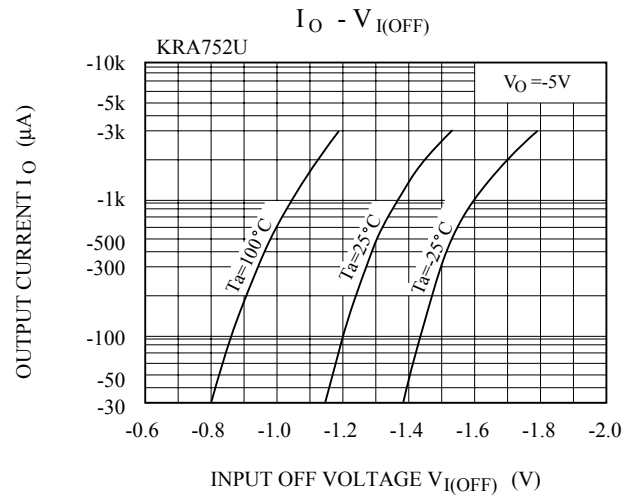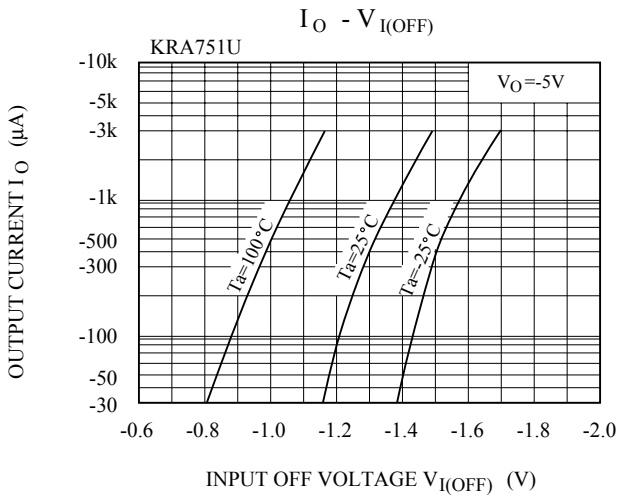

KRA751U~KRA756U

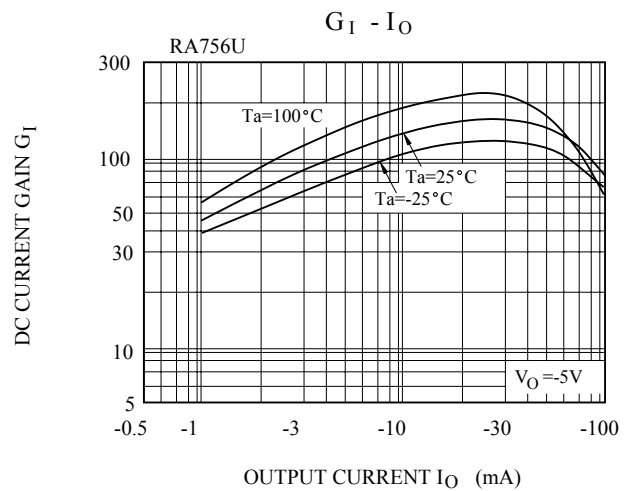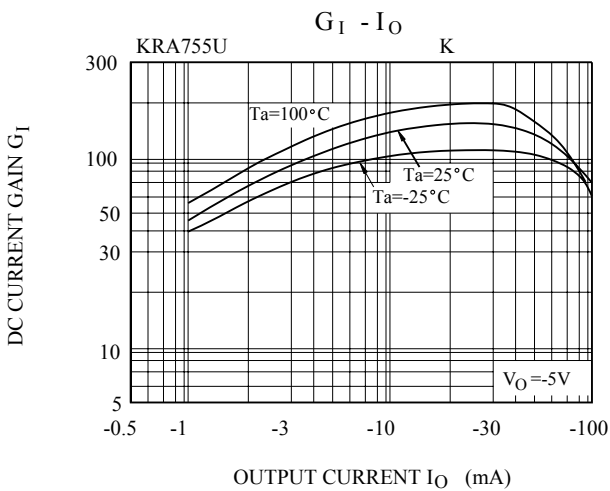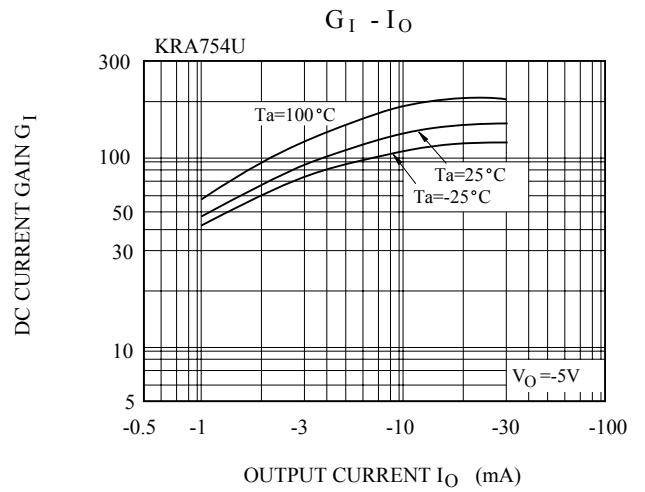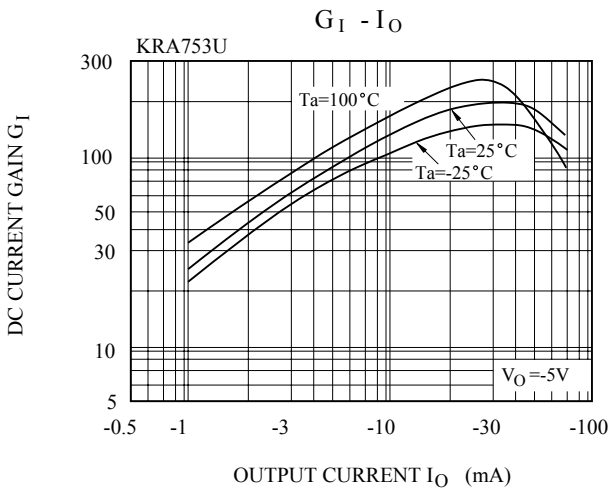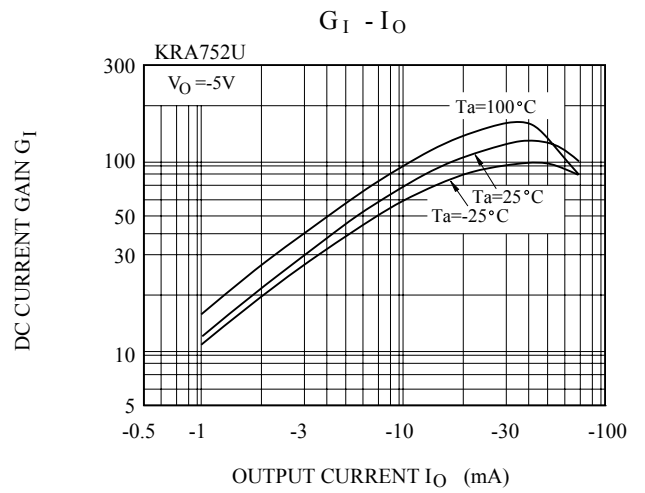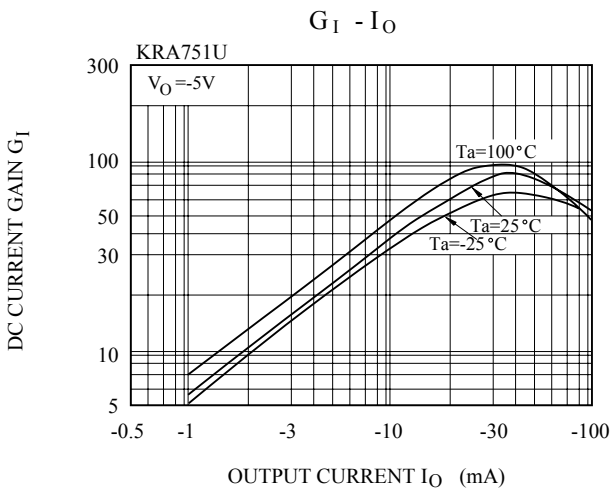

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.