

PSoC™ Automotive Multitouch Generation 6XL

Datasheet Summary

Note that this is a Summary Datasheet. To access the full version of this datasheet, register in [My Infineon Collaboration Platform \(MyICP\)](#).

Features

- Automotive Electronics Council (AEC) AEC-Q100 qualified
- Multi-touch capacitive touchscreen controller
 - 32-bit Arm® Cortex® CPU
 - Register-configurable
 - Noise-suppression technologies for display and EMI
 - Effective 20-V drive for higher signal-to-noise ratio (SNR)^[1]
 - AutoArmor improves both electromagnetic emissions and immunity
 - External display synchronization
 - Water rejection and wet-finger tracking using DualSense
 - Multi-touch glove with automatic mode switching
 - Ten fingers with thin glove (≤ 1-mm thick)
 - Two fingers with thick glove (≤ 5-mm thick)
 - Large object rejection
 - Automatic baseline tracking to environmental changes
 - Low-power look-for-touch mode
 - Field upgrades via bootloader
 - Manufacturing test kit (MTK)
 - Touchscreen sensor self-test
- System performance (configuration dependent)
 - Screen sizes up to 15-inch diagonal
 - 6.0-mm electrode pitch; 16:10 aspect ratio
 - Up to 88 sense pins, 1836 intersections; 16:10 aspect ratio (34 TX × 54 RX)
 - Reports up to ten fingers
 - Small finger support down to 4 mm

Note

1. Effective voltage when using 17 multi-phase TX and 5-V V_{CCTX} supply.

Features

- Power (configuration-dependent)
 - 1.71 to 1.95 V and 3.0 to 5.5 V logic and digital I/Os supply
 - 3.0 to 5.5 V analog supply
 - 30-mW average power
 - 30-μW typical deep-sleep power
- Sensor and system design (configuration-dependent)
 - Supports a variety of touchscreen sensors and stackups
 - Manhattan, diamond
 - Sensor-on-lens (SOL)
 - Plastic (PET) and glass-sensor substrates
 - LCD, AMOLED, and IPS displays
 - Metal mesh
- Communication interface
 - I²C slave at 100 and 400 kbps
 - SPI slave bit rates up to 8 Mbps
- Package
 - 100-pin TQFP 14 × 14 × 1.4 mm (0.5-mm pitch)
 - 128-pin TQFP 14 × 20 × 1.4 mm (0.5-mm pitch)
- Ambient temperature range
 - Automotive-A: -40°C to 85°C
 - Automotive-S: -40°C to 105°C

Ordering information

1 Ordering information

Table 1 lists the CYAT8168X touchscreen controllers.

Table 1 Ordering information^[2]

MPN	Number of sense pins	Number of fingers	Low-power wake-up button	CAPSENSE™ buttons	Water rejection	Thin glove support	Display Armor	Gestures	Thick overlay/thick glove support	5-V Tx	Package
CYAT81682-100AA61Z	61	10	-	✓	✓	✓	✓	-	-	-	100-pin TQFP
CYAT81682-100AS61Z	61	10	-	✓	✓	✓	✓	-	-	-	100-pin TQFP
CYAT81682-100AA71Z	71	10	-	✓	✓	✓	✓	-	-	-	100-pin TQFP
CYAT81682-100AS71Z	71	10	-	✓	✓	✓	✓	-	-	-	100-pin TQFP
CYAT81682-100AA77Z	77	10	-	✓	✓	✓	✓	-	-	-	100-pin TQFP
CYAT81682-100AS77Z	77	10	-	✓	✓	✓	✓	-	-	-	100-pin TQFP
CYAT81682-128AA88Z	88	10	-	✓	✓	✓	✓	-	-	-	128-pin TQFP
CYAT81682-128AS88Z	88	10	-	✓	✓	✓	✓	-	-	-	128-pin TQFP
CYAT81685-100AA61Z	61	10	-	✓	✓	✓	✓	✓	-	-	100-pin TQFP
CYAT81685-100AS61Z	61	10	-	✓	✓	✓	✓	✓	-	-	100-pin TQFP
CYAT81685-100AA71Z	71	10	-	✓	✓	✓	✓	✓	-	-	100-pin TQFP
CYAT81685-100AS71Z	71	10	-	✓	✓	✓	✓	✓	-	-	100-pin TQFP
CYAT81685-100AA77Z	77	10	-	✓	✓	✓	✓	✓	-	-	100-pin TQFP
CYAT81685-100AS77Z	77	10	-	✓	✓	✓	✓	✓	-	-	100-pin TQFP
CYAT81685-128AA88Z	88	10	-	✓	✓	✓	✓	✓	-	-	128-pin TQFP
CYAT81685-128AS88Z	88	10	-	✓	✓	✓	✓	✓	-	-	128-pin TQFP
CYAT81688-100AA61Z	61	10	-	✓	✓	✓	✓	✓	✓	✓	100-pin TQFP
CYAT81688-100AS61Z	61	10	-	✓	✓	✓	✓	✓	✓	✓	100-pin TQFP
CYAT81688-100AA71Z	71	10	-	✓	✓	✓	✓	✓	✓	✓	100-pin TQFP
CYAT81688-100AS71Z	71	10	-	✓	✓	✓	✓	✓	✓	✓	100-pin TQFP
CYAT81688-100AA77Z	77	10	-	✓	✓	✓	✓	✓	✓	✓	100-pin TQFP
CYAT81688-100AS77Z	77	10	-	✓	✓	✓	✓	✓	✓	✓	100-pin TQFP

Note


- All devices have the following base features: Water Rejection, DisplayArmor, AutoArmor, DualSense, CAPSENSE™ buttons, and large object detection and rejection.

Ordering information

Table 1 **Ordering information**^[2] (continued)

MPN	Number of sense pins	Number of fingers	Low-power wake-up button	CAPSENSE™ buttons	Water rejection	Thin glove support	Display Armor	Gestures	Thick overlay/thick glove support	5-V Tx	Package
CYAT81688-128AA88Z	88	10	-	✓	✓	✓	✓	✓	✓	✓	128-pin TQFP
CYAT81688-128AS88Z	88	10	-	✓	✓	✓	✓	✓	✓	✓	128-pin TQFP
CYAT81689-100AA61Z	61	10	✓	✓	✓	✓	✓	✓	✓	✓	100-pin TQFP
CYAT81689-100AS61Z	61	10	✓	✓	✓	✓	✓	✓	✓	✓	100-pin TQFP
CYAT81689-100AS71Z	71	10	✓	✓	✓	✓	✓	✓	✓	✓	100-pin TQFP
CYAT81689-100AA77Z	77	10	✓	✓	✓	✓	✓	✓	✓	✓	100-pin TQFP
CYAT81689-100AS77Z	77	10	✓	✓	✓	✓	✓	✓	✓	✓	100-pin TQFP
CYAT81689-128AA88Z	88	10	✓	✓	✓	✓	✓	✓	✓	✓	128-pin TQFP
CYAT81689-128AS88Z	88	10	✓	✓	✓	✓	✓	✓	✓	✓	128-pin TQFP

1.1 Ordering code definitions

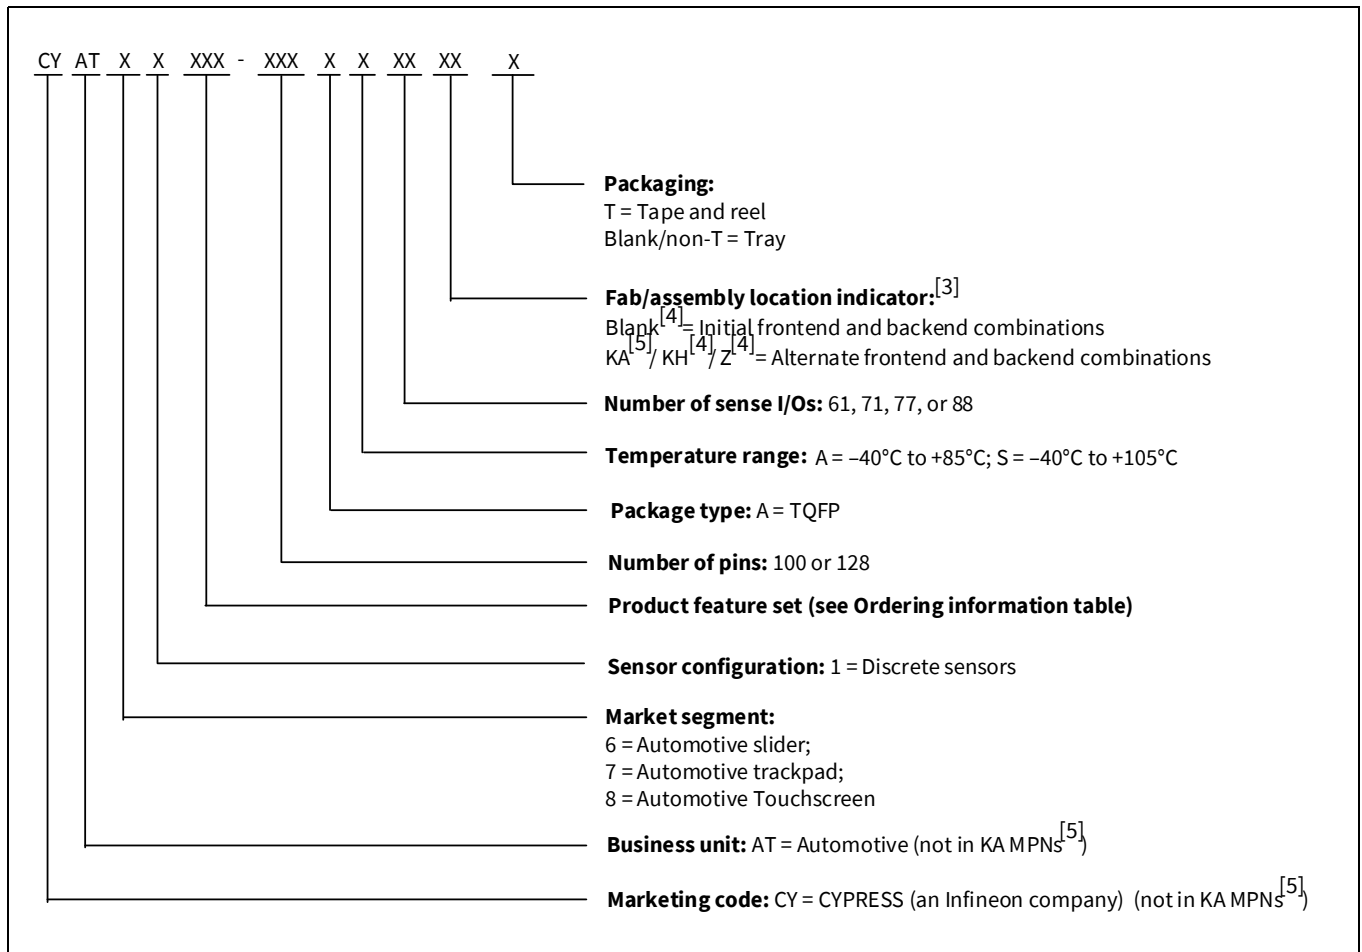

Notes

- All manufacturing locations (Blank / KA / KH / Z) have the same silicon ID.
- Example Blank/KH/Z MPNs: CYAT81688-100AS61, CYAT81688-100AS61KH, and CYAT81688-100AS61Z.
- Example KA MPN: 81688-100AS61KAT.

Revision history

Revision history

Document revision	Date	Description of changes
**	2015-10-28	New datasheet.
*A	2017-04-21	Updated Cypress Logo and Copyright.
*B	2017-11-13	Updated Ordering information : Removed column “Family”. Added column “Wake-up Button Support”. Updated part numbers. Updated Ordering code definitions : Added more details to reflect the updates of part numbers.
*C	2019-12-23	Updated Ordering information : Updated part numbers. Updated to new template.
*D	2020-11-26	Replaced CYAT81X with CYAT8168X in Document Title. Updated Features : Added “Automotive Electronics Council (AEC) AEC-Q100 qualified”. Updated Ordering information : No change in part numbers. Updated Ordering code definitions : Updated all details to reflect the updates of part numbers.
*E	2022-05-19	Updated to PSoC™ Automotive Multitouch branding guidelines. Updated Ordering information : Removed CYAT81689-100AA71Z and its details. Updated Ordering code definitions : Added Note 3, 4, and 5 and referred the notes in appropriate places.
*F	2022-06-13	Updated Ordering code definitions under Ordering information : Replaced KG with KH in all instances.
*G	2022-07-26	Updated Document Title. Added MyICP link. Migrated to Infineon template.

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2022-07-26
Published by
Infineon Technologies AG
81726 Munich, Germany

© 2022 Infineon Technologies AG.
All Rights Reserved.

Do you have a question about this document?
Go to www.infineon.com/support

Document reference
002-04310 Rev. *G

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.