

## VHF Variable Capacitance Diode

### ● FEATURES

- Excellent linearity
- Excellent matching to 0.7% DMA
- Very small plastic SMD package
- C28: 2.5 pF; ratio: 16.
- Low series resistance.


### ● APPLICATIONS

- Electronic tuning in VHF television tuners, band B up to 460 MHz
- VCO.

### ● DESCRIPTION

The BB133 is a variable capacitance diode fabricated in planar technology, and encapsulated in the SOD323 very small plastic SMD package.

The excellent matching performance is achieved by gliding matching and a direct matching assembly procedure. The unmatched type, BB150 has the same specification.



### LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
$V_R$	continuous reverse voltage	–	30	V
$I_F$	continuous forward current	–	20	mA
$T_{sg}$	storage temperature	–55	+150	°C
$T_j$	operating junction temperature	–55	+125	°C

### ELECTRICAL CHARACTERISTICS

$T_j = 25^\circ\text{C}$  unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$I_R$	reverse current	$V_R = 30 \text{ V}$ ; see Fig.2	–	10	nA
		$V_R = 30 \text{ V}; T_j = 85^\circ\text{C}$ ; see Fig.2	–	200	nA
$r_s$	diode series resistance	$f = 100 \text{ MHz}$ ; note 1	–	0.9	□
$C_d$		$V_R = 0.5 \text{ V}; f = 1 \text{ MHz}$ ; see Figs 1 and 3	38	46	pF
		$V_R = 28 \text{ V}; f = 1 \text{ MHz}$ ; see Figs 1 and 3	2.2	2.6	pF
$\frac{C_d(0.5V)}{C_d(28V)}$	capacitance ratio	$f = 1 \text{ MHz}$	14	21	
$\frac{\square C_d}{C_d}$	capacitance matching	$V_R = 0.5 \text{ to } 28 \text{ V}$ ; in a sequence of 4 diodes (gliding)	–	0.7	%
$C_d$		$V_R = 0.5 \text{ to } 28 \text{ V}$ ; in a sequence of 15 diodes (gliding)	–	2	%

### Note

1.  $V_R$  is the value at which  $C_d = 30 \text{ pF}$ .

SK MAKE CONSCIOUS PRODUCT

CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE

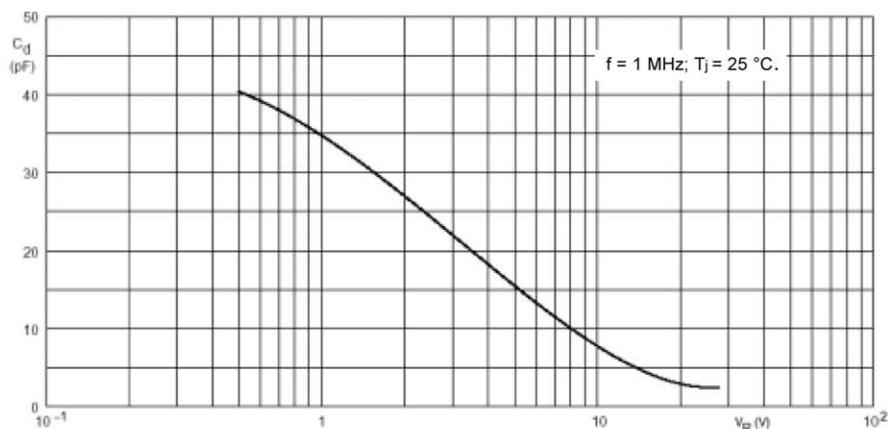


Fig.1 Diode capacitance as a function of reverse voltage; typical values.

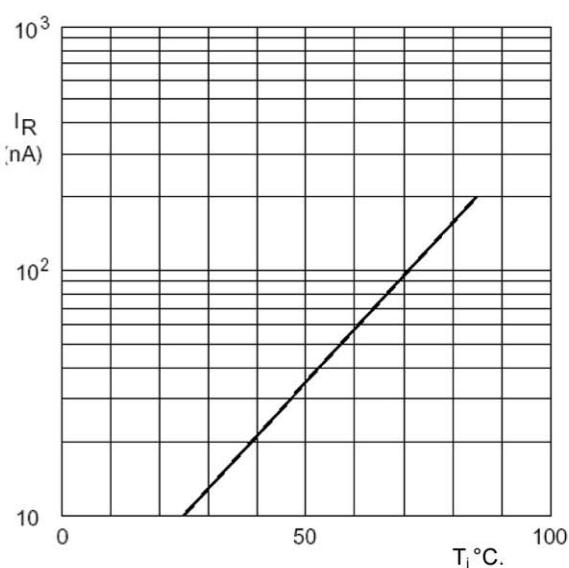


Fig.2 Reverse current as a function of junction temperature; maximum values.

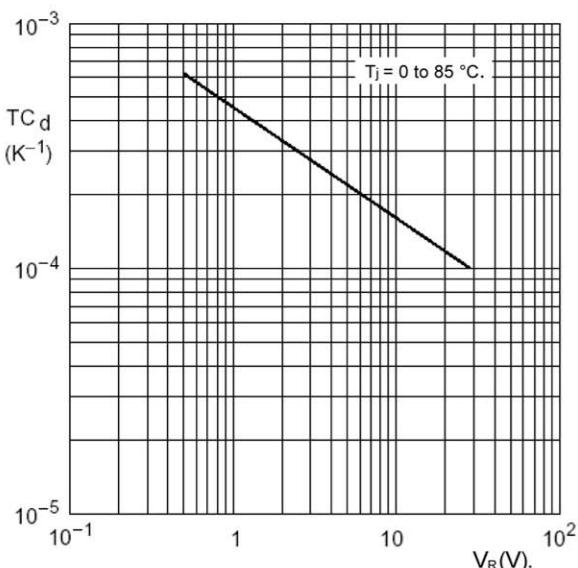


Fig.3 Temperature coefficient of diode capacitance as a function of reverse voltage; typical values.

**SK MAKE CONSCIOUS PRODUCT**

**CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE**