


### TO-92MOD



1. EMITTER
2. COLLECTOR
3. BASE

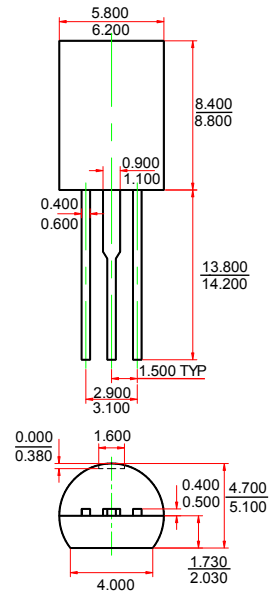

## Features

- ◇ Complementary to 2SC1627A.
- ◇ Driver Stage Application of 30 to 35 Watts Amplifiers.

## MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Dimensions in inches and (millimeters)

Symbol	Parameter	Value	Units
$V_{CBO}$	Collector-Base Voltage	-80	V
$V_{CEO}$	Collector-Emitter Voltage	-80	V
$V_{EBO}$	Emitter-Base Voltage	-5	V
$I_C$	Collector Current -Continuous	-400	mA
$P_C$	Collector Power Dissipation	800	mW
$T_J$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature	-55-150	$^\circ\text{C}$

## ELECTRICAL CHARACTERISTICS ( $T_{amb}=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -100 \mu\text{A}$ , $I_E = 0$	-80		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -5 \text{mA}$ , $I_B = 0$	-80		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -100 \mu\text{A}$ , $I_C = 0$	-5		V
Collector cut-off current	$I_{CBO}$	$V_{CB} = -50 \text{V}$ , $I_E = 0$		-0.1	$\mu\text{A}$
Collector cut-off current	$I_{EBO}$	$V_{EB} = -5 \text{V}$ , $I_B = 0$		-0.1	$\mu\text{A}$
DC current gain	$h_{FE(1)}$	$V_{CE} = -2 \text{V}$ , $I_C = -50 \text{mA}$	70	240	
	$h_{FE(2)}$	$V_{CE} = -2 \text{V}$ , $I_C = -200 \text{mA}$	40		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -200 \text{mA}$ , $I_B = -20 \text{mA}$		-0.4	V
Base-emitter voltage	$V_{BE}$	$V_{CE} = -2 \text{V}$ , $I_C = -5 \text{mA}$	-0.55	-0.8	V
Transition frequency	$f_T$	$V_{CE} = -10 \text{V}$ , $I_C = -10 \text{mA}$		100	MHz
Out capacitance	$C_{ob}$	$V_{CB} = -10 \text{V}$ , $f = 1 \text{MHz}$		14	pF

## CLASSIFICATION OF $h_{FE(1)}$

Rank	O	Y
Range	70-140	120-240

## Typical Characteristics

