


QUAD OPERATIONAL AMPLIFIERS

LM324

FEATURES

- Internally frequency compensated for unity gain
- Large DC voltage gain : 100dB
- Wide power supply range : 3V~32V(or \pm 1.5V~15V)
- Input common-mode voltage range includes ground
- Large output voltage swing : 0V DC to V_{CC} -1.5V DC
- Power drain suitable for battery operation
- Moisture Sensitivity Level 3

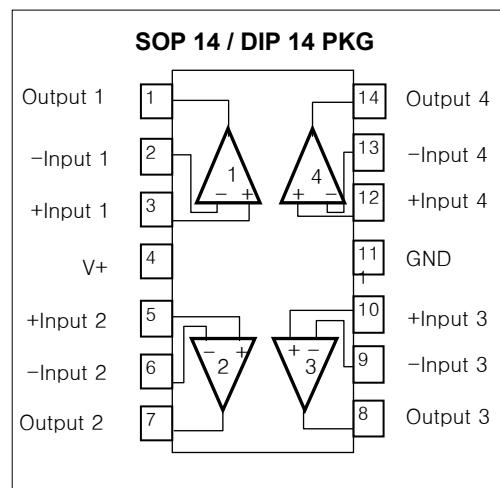


QUAD OPERATION AMPLIFIERS

LM324 consists of four independent, high gain, internally frequency compensated operational amplifiers which were designed specifically to operate from a single power supply over a wide voltage range. Operation from split power supplies is also possible so long as the difference between the two supplies is 3 volts to 32 volts voltage.

Application areas include transducer amplifier, DC gain blocks and all the conventional OP amp circuits which now can be easily implemented in single power supply systems.

EQUIVALENT CIRCUIT

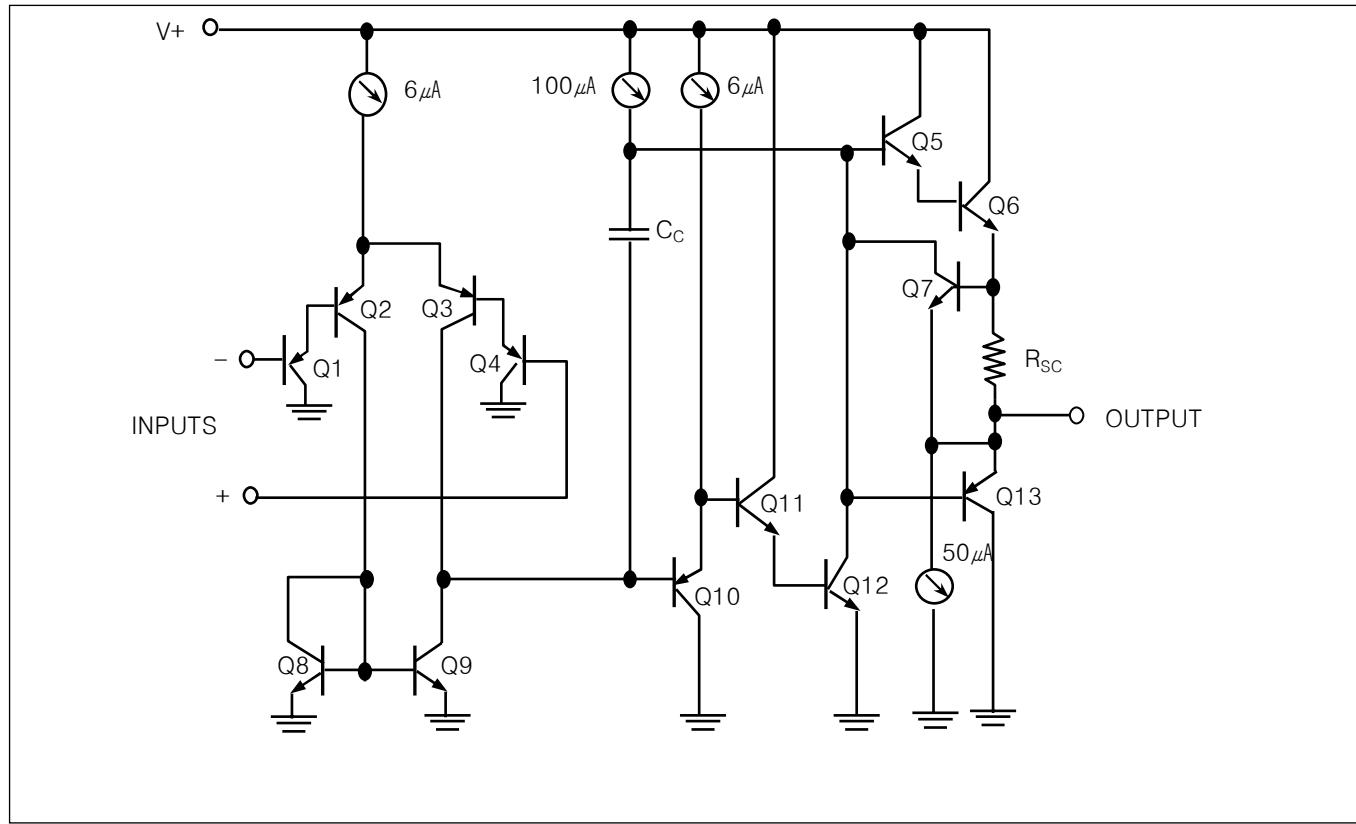

QUAD OPERATIONAL AMPLIFIERS

LM324

ABSOLUTE MAXIMUM RATINGS

| CHARACTERISTIC | SYMBOL | VALUE | UNIT |
|---|----------------------|-------------|------|
| Power Supply Voltage | V _{CC} | ±18 or 32 | V |
| Differential Input Voltage | V _{I(DIFF)} | 32 | V |
| Input Voltage | V _I | -0.3 to +32 | V |
| Output Short Circuit to GND | | Continuous | |
| V _{CC} ≤15V T _A =25°C (One Amp) | | | |
| Power Dissipation | P _D | 570 | mW |
| Operating Temperature Range | T _{OPR} | 0~+70 | °C |
| Storage Temperature Range | T _{STG} | -65 to +150 | °C |

Electrical characteristics at specified free-air temperature, V_{CC}=5V(unless otherwise noted)

| PARAMETER | *TEST CONDITIONS | LM324D | | | UNIT |
|---|--|------------|---------------------------|-----|-------|
| | | MIN | TYP | MAX | |
| V _{IO} Input Offset Voltage | V _{CC} =5V to MAX, V _{ICR} =V _{ICR} MIN, V _O =1.4V | 25°C | | 3 | 7 |
| | | Full Range | | | 9 |
| αV _{IO} Average Temperature Coefficient of Input Offset Voltage | | Full Range | | 7 | μV/°C |
| I _{IO} Input Offset Current | V _O =1.4V | 25°C | | 2 | 50 |
| | | Full Range | | | 150 |
| αI _{IO} Average Temperature Coefficient of Input Offset Current | | Full Range | | 10 | pA/°C |
| I _{IB} Input Bias Current | V _O =1.4V | 25°C | | -20 | -250 |
| | | Full Range | | | -500 |
| V _{ICR} Common-Mode Input Voltage Range | V _{CC} =5V to MAX | 25°C | 0 to V _{CC} -1.5 | | |
| | | Full Range | 0 to V _{CC} -2 | | V |
| V _{OH} High-Level Output Voltage | R _L ≥2kΩ | 25°C | V _{CC} -1.5 | | |
| | V _{CC} =MAX, R _L =2kΩ | Full Range | 26 | | |
| | V _{CC} =MAX, R _L ≥10kΩ | Full Range | 27 | 28 | |
| V _{OL} Low-Level Output Voltage | R _L ≥10kΩ | Full Range | | 5 | 20 |
| A _{VD} Large-Signal Differential Voltage Amplification | V _{CC} =15V, V _O =1V to 11V, R _L ≥2kΩ | 25°C | 25 | 100 | |
| | | Full Range | 15 | | |
| CMRR Common-Mode Rejection Ratio | V _{CC} =5V to MAX, V _{ICR} =V _{ICR} MIN. | 25°C | 65 | 80 | dB |
| K _{SVR} Supply Voltage Rejection Ratio(ΔV _{CC} /ΔV _{IO}) | V _{CC} =5V to MAX | 25°C | 65 | 100 | dB |
| V _{O1} /V _{O2} Crosstalk Attenuation | f=1 kHz to 20kHz | 25°C | | 120 | |
| I _O Output Current | V _{CC} =15V, V _{ID} =1V, V _O =0 | 25°C | -20 | -30 | |
| | | Full Range | -10 | | |
| | V _{CC} =15V, V _{ID} =1V, V _O =15V | 25°C | 10 | 20 | |
| | | Full Range | 5 | | |
| | V _{ID} =1V, V _O =200mV | 25°C | 12 | 30 | |
| I _{OS} Short-Circuit Output Current | V _{CC} at 5V, GND at -5V, V _O =0 | 25°C | | ±40 | ±60 |
| | | | | | mA |
| I _{CC} Supply Current (Four Amplifiers) | V _O =2.5V, No Load | Full Range | | 0.7 | 1.2 |
| | V _{CC} =MAX, V _O =0.5V _{CC} , No load | Full Range | | 1.1 | 3 |


* All characteristics are measured under open loop conditions with zero common-mode input voltage unless otherwise specified <> V_{CC} for testing purpose is 30V. Full range is 0°C to 70°C.

HTC

QUAD OPERATIONAL AMPLIFIERS


LM324

TYPICAL PERFORMANCE CHARACTERISTICS

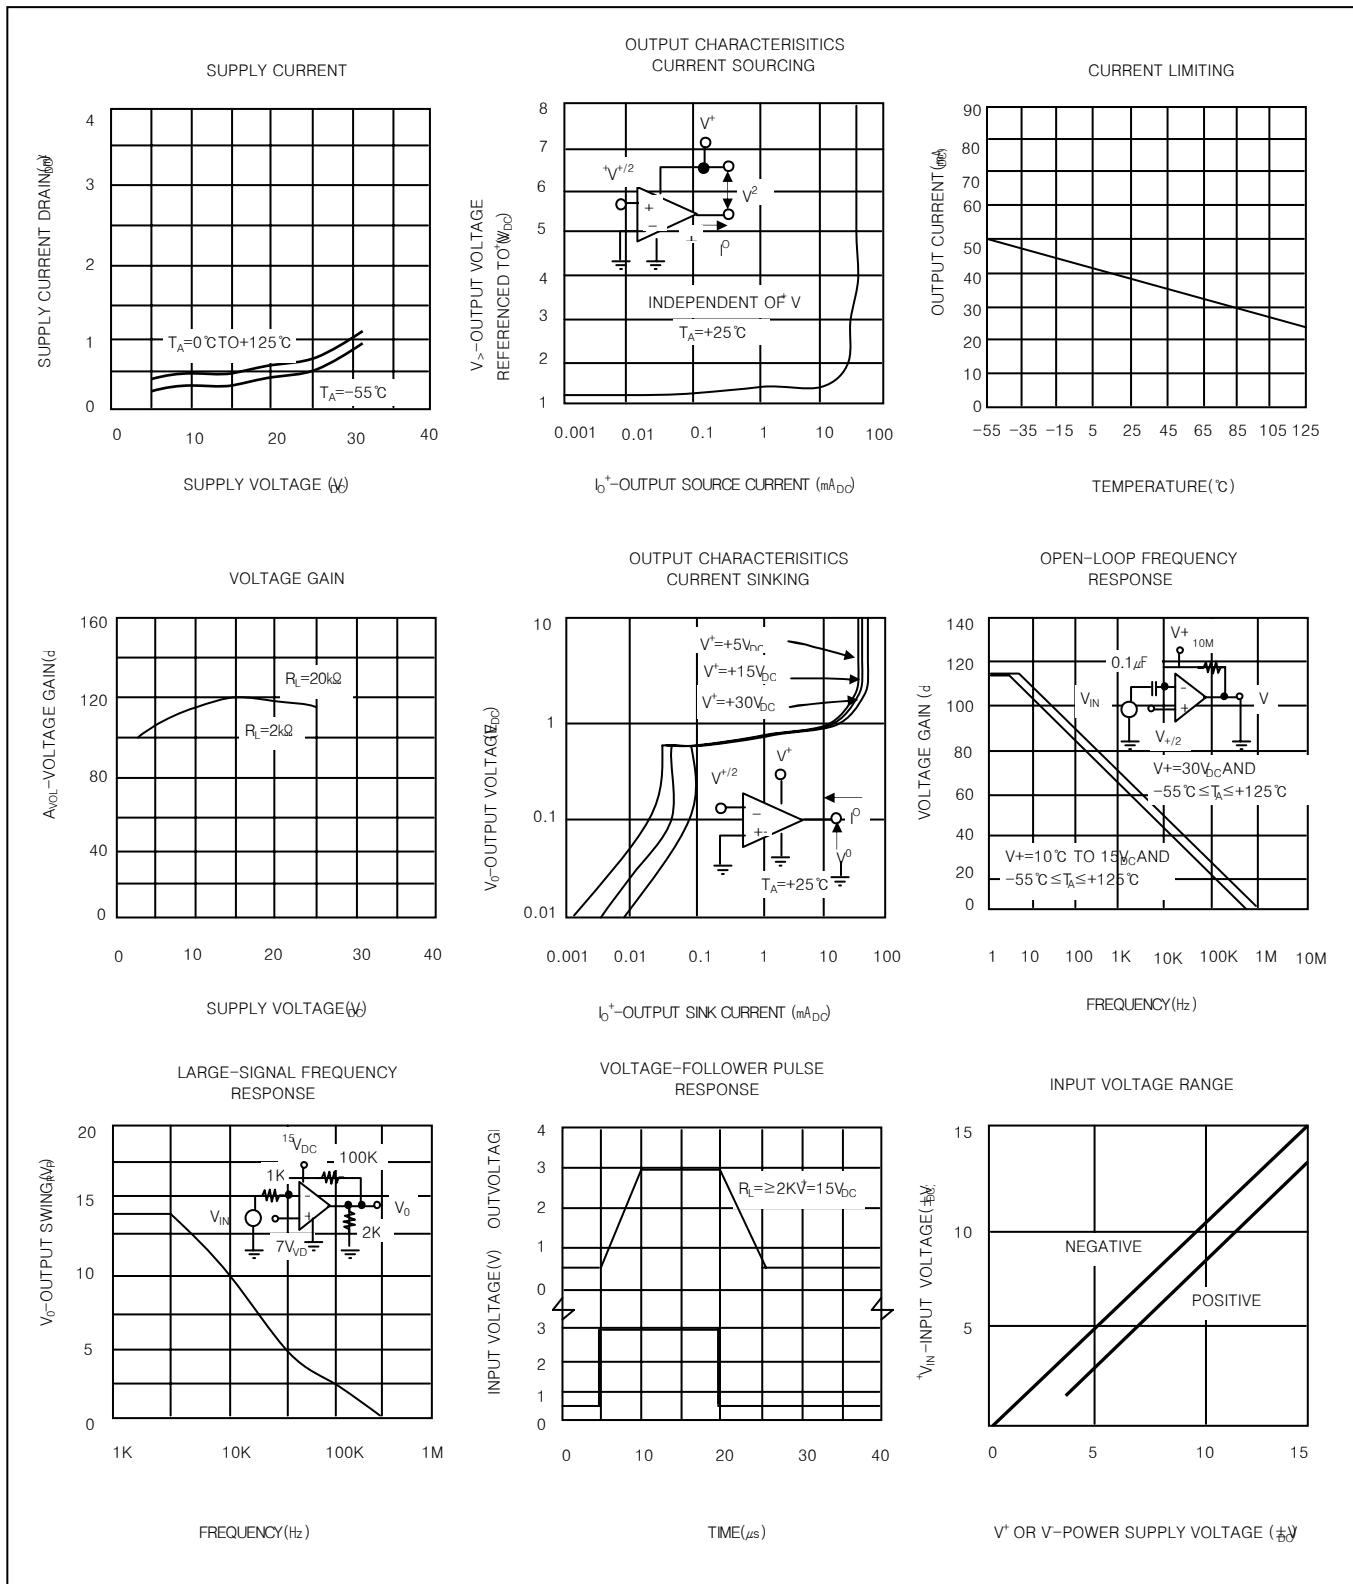

HTC

TYPICAL PERFORMANCE CHARACTERISTICS (CONTINUED)

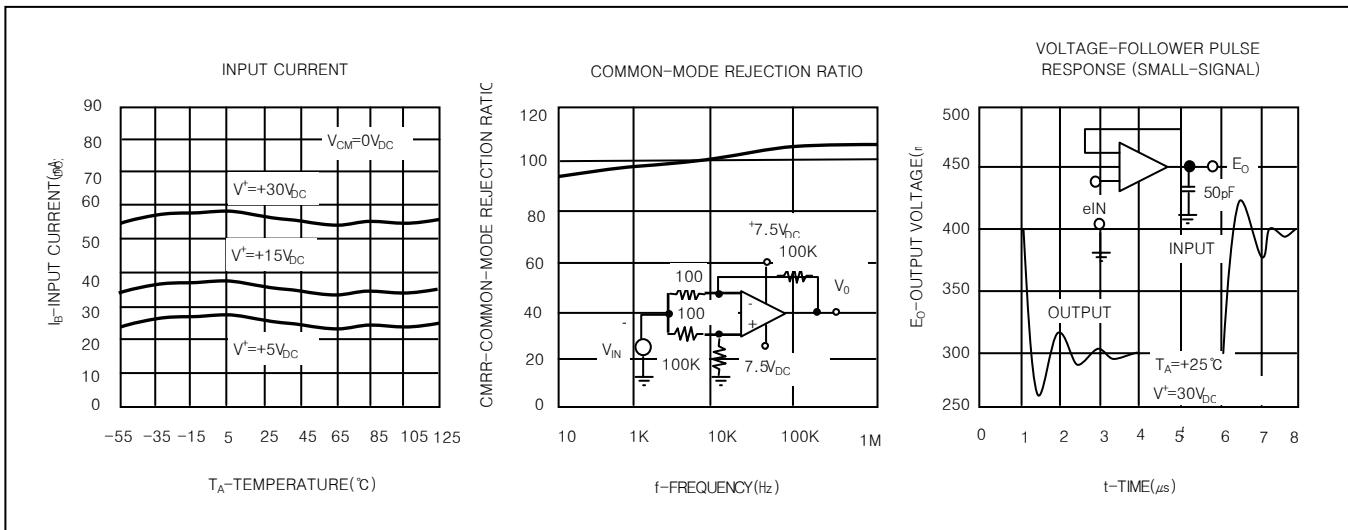

TYPICAL APPLICATIONS

