


### Features

- Supports up to 40 Watts Power
- Low Insertion Loss 0.4 dB typical up to 40 GHz
- High Isolation 58 dB typical at 10 GHz
- RoHS\* Compliant

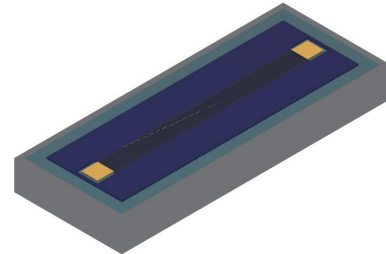

### Description

The MMSPN050-C53 is a broadband medium power PIN diode designed as a 50  $\Omega$  microstrip when biased at zero or a negative voltage. This device is usable up to 40 GHz.

### Electrical Specifications: $T_C = +25^\circ\text{C}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Breakdown Voltage	$I_R = 10 \mu\text{A}$	V	200	—	—
Series Resistance	$I_F = 100 \text{ mA}$ , 500 MHz	$\Omega$	—	0.6	—
Minority Carrier Lifetime	$I_F = 10 \text{ mA}$ , $I_R = 6 \text{ mA}$ , 10% / 90%	ns	—	4000	—
Insertion Loss	$V_R = -50 \text{ V}$ , 10 GHz $V_R = -50 \text{ V}$ , <40 GHz	dB	—	0.15 0.20	0.30 0.40
Input Return Loss	10 GHz <40 GHz	dB	20 —	25 15	—
Isolation	$I_F = 40 \text{ mA}$ , 10 GHz, $I_F = 40 \text{ mA}$ , 5 - 40 GHz	dB	50 —	55 50	—

### Absolute Maximum Ratings

Parameter	Absolute Maximum
Reverse Voltage	200 V
Forward Current	500 mA
Thermal Resistance	65°C/W
Junction Temperature	+150°C
Storage Temperature	-65°C to +125°C
Assembly Temperature	+260°C, per JEDEC STD-J-20C


### Ordering Information

Part Number	Package
MMSPN050-C53	bulk


\* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

### Typical Performance Curves: $T_A = +25^\circ\text{C}$ , $Z_O = 50 \Omega$ , -10 dBm Small Signal


**Insertion Loss**

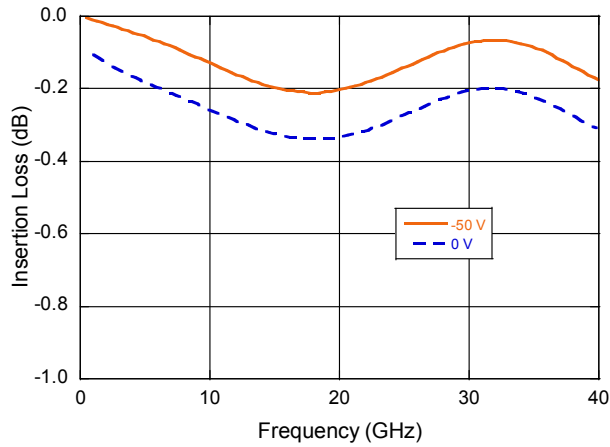


**Isolation**

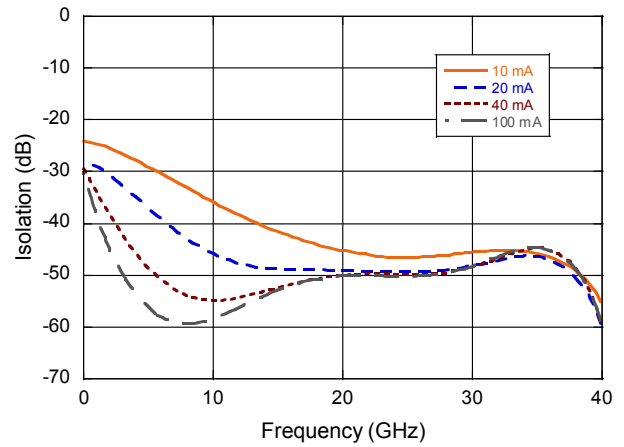


**Input Return Loss**

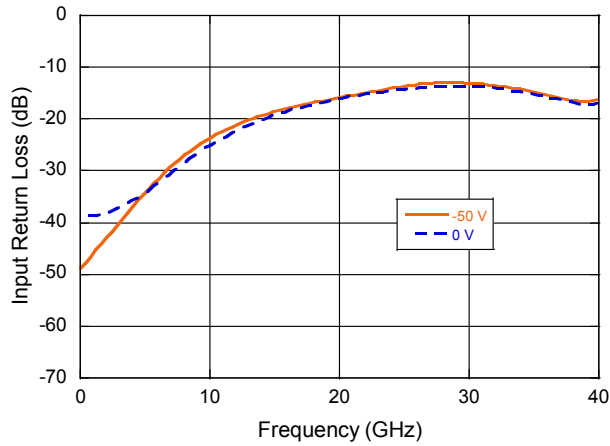


**Resistance vs. Current @ 500 MHz**

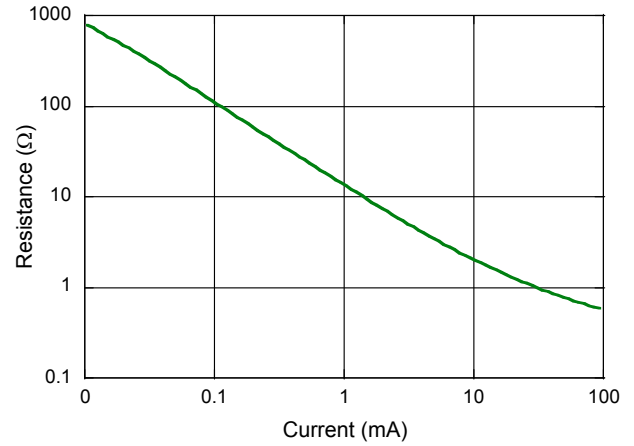


### Recommended Assembly for Best Thermals

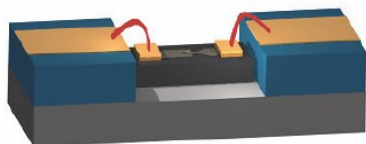

### Electrical Schematic



### Outline Drawing (C53)

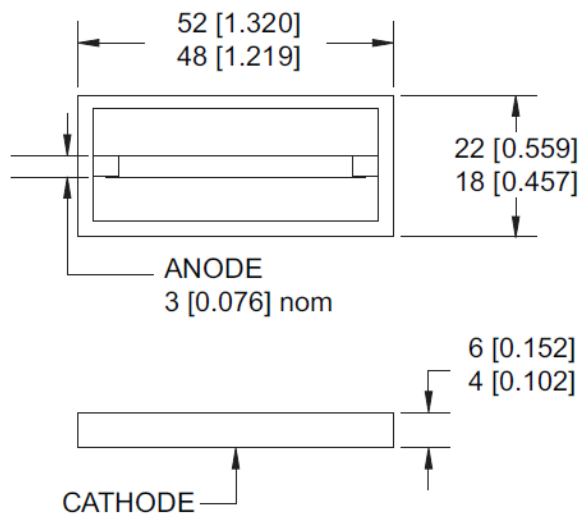

Dimensions in mils [mm]

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.