



Features

- Glass passivated chip
- 200W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle) : 0.01%.
- Low leakage
- Uni and Bidirectional unit
- Excellent clamping capability
- Very fast response time
- RoHS compliant

SOD-123FL

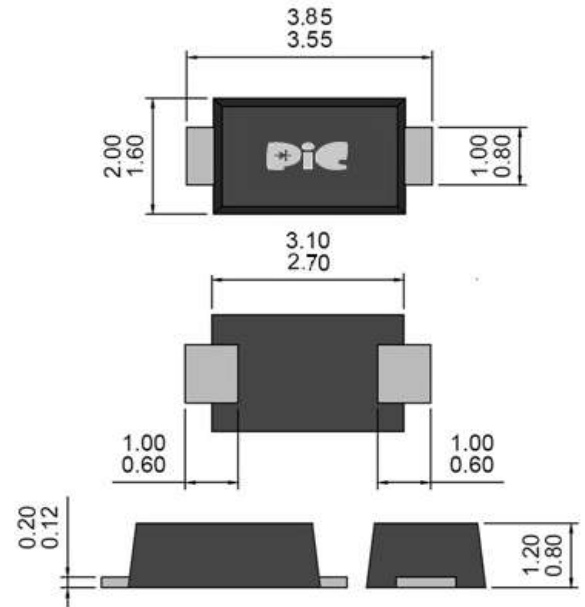

Unit: millimeters



Mechanical Data

- Epoxy: UL94V-0 rated flame retardant
- Case: Epoxy, Molded
- Terminals: Solder plated solderable per MIL-STD-750 Method 2026
- Polarity: Color band denotes cathode end except Bipolar
- Weight: Approx. 0.0006 ounce, 0.0173 grams

Maximum Ratings & Electrical Characteristic ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	UNITS
Peak Power Dissipation with a 10/1000 μ s waveform (Notes 1)	P_{PP}	200	Watts
Peak Power Dissipation with a 8/20 μ s waveform (Notes 1)	P_{PP}	1000	Watts
Peak Forward Surge Current , 8.3 ms single half sine-wave unidirectional only (Notes 2)	I_{FSM}	20	Amps
Peak Pulse Current with a 10/1000 μ s waveform (Notes 1)	I_{PP}	See Next Table	Amps
Power dissipation on infinite heatsink at $T_L = 75^\circ\text{C}$	P_D	0.4	Watts
Max. instantaneous forward voltage at 25 A for unidirectional only	V_F	3.5	Volts
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55~+150	$^\circ\text{C}$

Notes :

- (1) Non-repetitive current pulse, per Fig.5 and derated above $T_A = 25^\circ\text{C}$ per Fig.1.
- (2) Measured on 8.3ms single half sine-wave, or equivalent square wave, duty cycle = 4 pulses per minutes maximum.



SMF5.0A THRU SMF220CA

200W Transient Voltage Suppressors

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Part Number		Marking Code		Breakdown Voltage			Max. Reverse Leakage	Working Peak Reverse Voltage	Max. Reverse Surge Current	Max. Clamping Voltage
				$V_{BR} @ I_T$			$I_R @ V_{RWM}$	V_{RWM}	I_{PP}	$V_C @ I_{PP}$
				Min.	Max.	I_T				
UNI	BI	UNI	BI	V	V	mA	μA	V	A	V
SMF5.0A	SMF5.0CA	FE	KE	6.4	7	10	400	5	21.74	9.2
SMF6.0A	SMF6.0CA	FG	KG	6.67	7.37	10	400	6	19.42	10.3
SMF6.5A	SMF6.5CA	FK	KK	7.22	7.98	10	250	6.5	17.86	11.2
SMF7.0A	SMF7.0CA	FM	KM	7.78	8.6	10	100	7	16.67	12
SMF7.5A	SMF7.5CA	FP	KP	8.33	9.21	1	50	7.5	15.5	12.9
SMF8.0A	SMF8.0CA	FR	KR	8.89	9.83	1	25	8	14.71	13.6
SMF8.5A	SMF8.5CA	FT	KT	9.44	10.4	1	10	8.5	13.89	14.4
SMF9.0A	SMF9.0CA	FV	KV	10	11.1	1	5	9	12.99	15.4
SMF10A	SMF10CA	FX	KX	11.1	12.3	1	2.5	10	11.76	17
SMF11A	SMF11CA	FZ	KZ	12.2	13.5	1	2.5	11	10.99	18.2
SMF12A	SMF12CA	HE	LE	13.3	14.7	1	2.5	12	10.05	19.9
SMF13A	SMF13CA	HG	LG	14.4	15.9	1	1	13	9.3	21.5
SMF14A	SMF14CA	HK	LK	15.6	17.2	1	1	14	8.62	23.2
SMF15A	SMF15CA	HM	LM	16.7	18.5	1	1	15	8.2	24.4
SMF16A	SMF16CA	HP	LP	17.8	19.7	1	1	16	7.69	26
SMF17A	SMF17CA	HR	LR	18.9	20.9	1	1	17	7.25	27.6
SMF18A	SMF18CA	HT	LT	20	22.1	1	1	18	6.85	29.2
SMF19A	SMF19CA	HB	LB	21.1	23.3	1	1	19	6.54	30.6
SMF20A	SMF20CA	HV	LV	22.2	24.5	1	1	20	6.17	32.4
SMF22A	SMF22CA	HX	LX	24.4	26.9	1	1	22	5.63	35.5
SMF24A	SMF24CA	HZ	LZ	26.7	29.5	1	1	24	5.14	38.9
SMF26A	SMF26CA	JE	ME	28.9	31.9	1	1	26	4.75	42.1
SMF28A	SMF28CA	JG	MG	31.1	34.4	1	1	28	4.41	45.4
SMF30A	SMF30CA	JK	MK	33.3	36.8	1	1	30	4.13	48.4
SMF33A	SMF33CA	JM	MM	36.7	40.6	1	1	33	3.75	53.3
SMF36A	SMF36CA	JP	MP	40	44.2	1	1	36	3.44	58.1
SMF40A	SMF40CA	JR	MR	44.4	49.1	1	1	40	3.1	64.5
SMF43A	SMF43CA	JT	MT	47.8	52.8	1	1	43	2.88	69.4
SMF45A	SMF45CA	JV	MV	50	55.3	1	1	45	2.75	72.7
SMF48A	SMF48CA	JX	MX	53.3	58.9	1	1	48	2.58	77.4
SMF51A	SMF51CA	JZ	MZ	56.7	62.7	1	1	51	2.43	82.4
SMF54A	SMF54CA	XE	NE	60	66.3	1	1	54	2.3	87.1
SMF58A	SMF58CA	XG	NG	64.4	71.2	1	1	58	2.14	93.6
SMF60A	SMF60CA	XK	NK	66.7	73.7	1	1	60	2.07	96.8
SMF64A	SMF64CA	XM	NM	71.1	78.6	1	1	64	1.94	103


Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Part Number		Marking Code		Breakdown Voltage			Max. Reverse Leakage	Working Peak Reverse Voltage	Max. Reverse Surge Current	Max. Clamping Voltage
				$V_{BR} @ I_T$						
				Min.	Max.	I_T	$I_R @ V_{RWM}$	V_{RWM}	I_{PP}	$V_C @ I_{PP}$
UNI	BI	UNI	BI	V	V	mA	μA	V	A	V
SMF70A	SMF70CA	XP	NP	77.8	86	1	1	70	1.77	113
SMF75A	SMF75CA	XR	NR	83.3	92.1	1	1	75	1.65	121
SMF78A	SMF78CA	XT	NT	86.7	95.8	1	1	78	1.59	126
SMF80A	SMF80CA	XB	NB	88.8	97.6	1	1	80	1.55	129
SMF85A	SMF85CA	XV	NV	94.4	104	1	1	85	1.46	137
SMF90A	SMF90CA	XX	NX	100	111	1	1	90	1.37	146
SMF100A	SMF100CA	XZ	NZ	111	123	1	1	100	1.23	162
SMF110A	SMF110CA	TE	PE	122	135	1	1	110	1.13	177
SMF120A	SMF120CA	TG	PG	133	147	1	1	120	1.04	193
SMF130A	SMF130CA	TK	PK	144	159	1	1	130	0.96	209
SMF140A	SMF140CA	TB	PB	155	171	1	1	140	0.89	224
SMF150A	SMF150CA	TM	PM	167	185	1	1	150	0.82	243
SMF160A	SMF160CA	TP	PP	178	197	1	1	160	0.77	259
SMF170A	SMF170CA	TR	PR	189	209	1	1	170	0.73	275
SMF180A	SMF180CA	TT	PT	200	220	1	1	180	0.68	292
SMF190A	SMF190CA	TV	PV	211	232	1	1	190	0.65	308
SMF200A	SMF200CA	TX	PX	224	247	1	1	200	0.62	324
SMF220A	SMF220CA	TZ	PZ	246	272	1	1	220	0.56	356

Notes :

- (1) The available parts are "A" type only, the parts without A (V_{BR} is $\pm 10\%$) is not available.
- (2) Add suffix 'CA' after part number to specify Bi-directional devices.
- (3) For Bi-Directional devices having V_R of 10 volts and under, the I_R limit is double.

Suggested Pad Layout

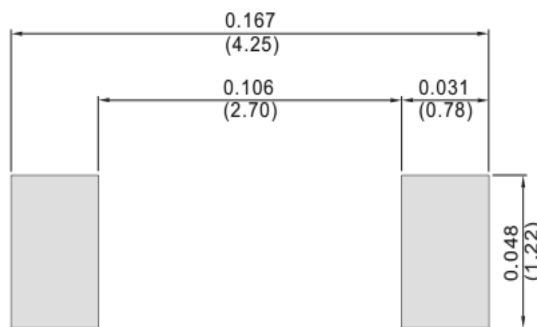

Unit: inch (mm)

Rating & Characteristic Curves

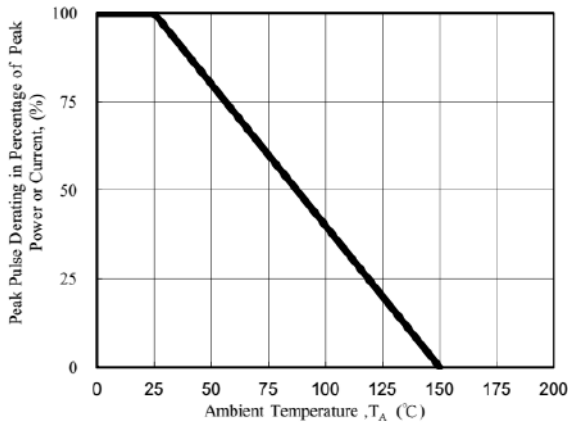


Fig. 1 Pulse Derating Curve

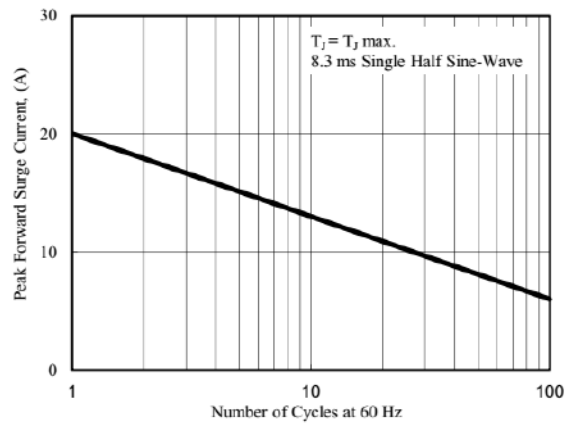


Fig. 2 Max. Non-Repetitive Surge Current

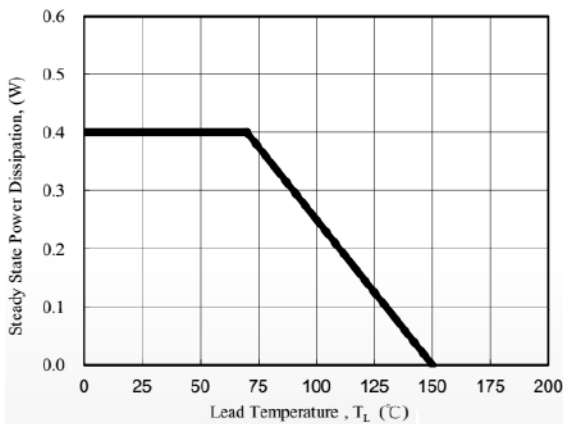


Fig. 3 Steady State Power Derating Curve

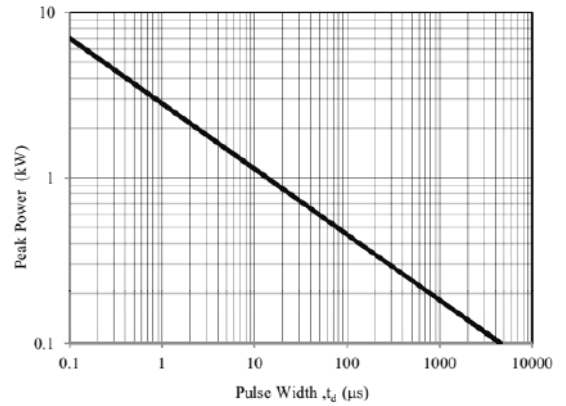


Fig. 4 Peak Pulse Power Rating Curve

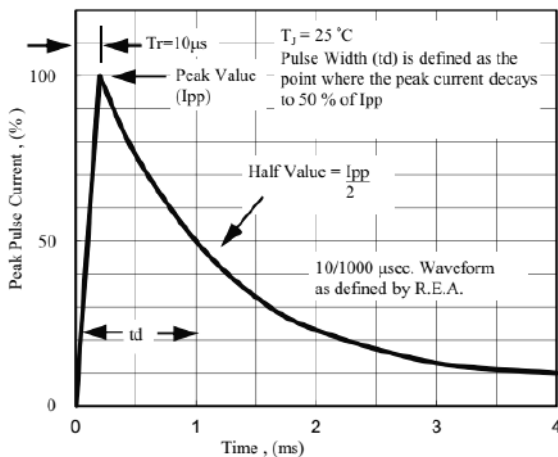


Fig. 5 Pulse Waveform


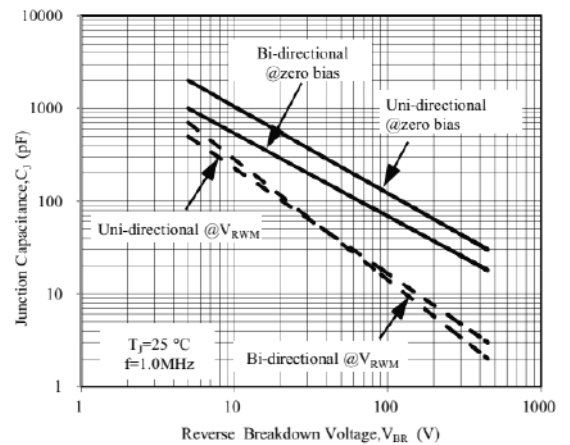


Fig. 6 Typical Junction Capacitance

Recommend IR Reflow Soldering Thermal Profile

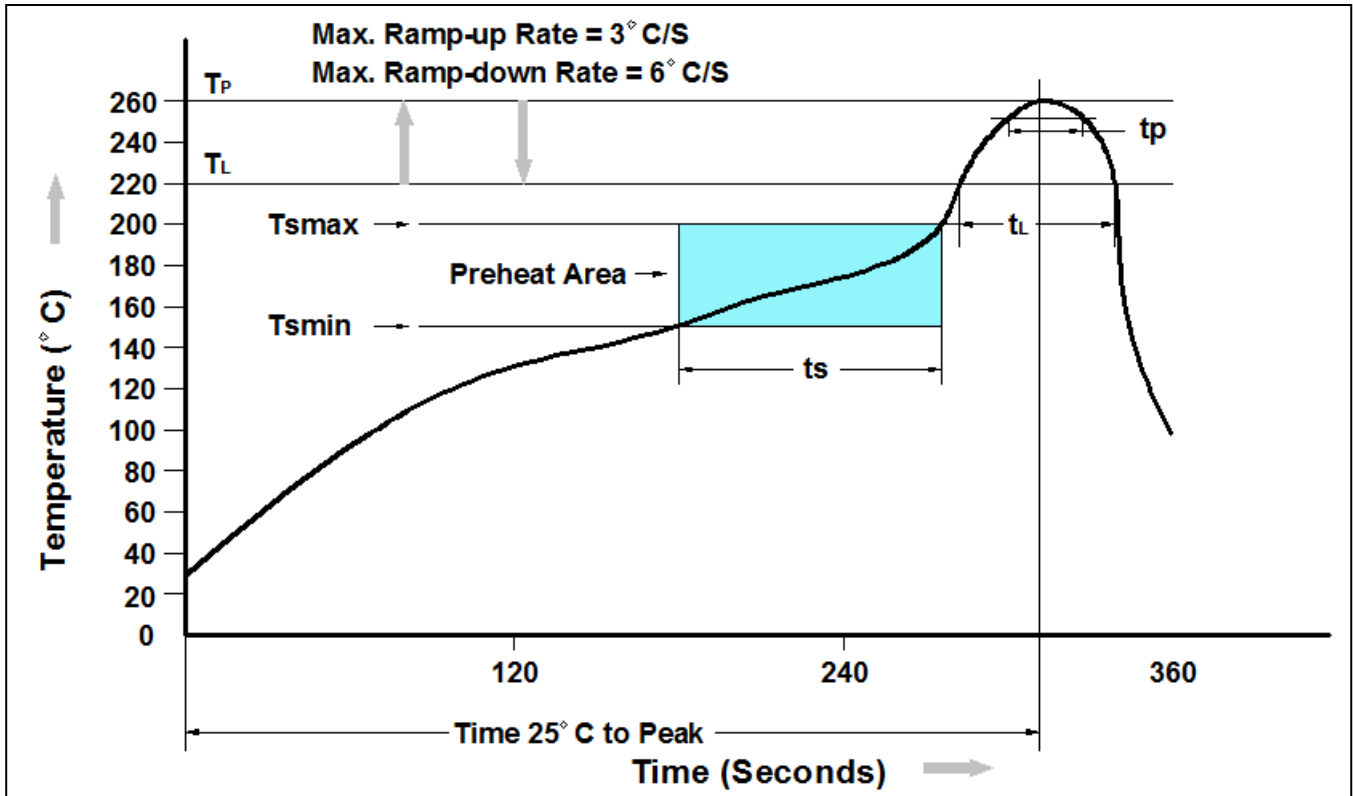

Profile Feature	Pb-Free Assembly Profile
Temperature Min. (T _{smin})	150°C
Temperature Max. (T _{smax})	200°C
Time (t _s) from (T _{smin} to T _{smax})	60-120 seconds
Average Ramp-up Rate (t _L to t _P)	3°C/second max.
Liquidous Temperature (T _L)	217°C
Time (t _L) Maintained Above (T _L)	60 – 150 seconds
Peak Temperature	260°C +0°C / -5°C
Time (t _P) within 5°C of actual Peak Temperature	30 seconds
Ramp-down Rate (T _P to T _L)	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.

Ordering Information

Part Number	Description	Quantity
SMF5.0A THRU SMF220CA	SOD-123FL Reel	3000 pcs

DISCLAIMER

- The information in this document and any product described herein are subject to change without notice and should not be construed as a commitment by Paceleader, Paceleader reserve the right to make changes to the information in this document.
- Though Paceleader make effort to improve product quality and reliability, Product can malfunction and fail due to their inherent electrical sensitivity and vulnerability to physical stress, it is the responsibility of the customer, when utilizing Paceleader products, to comply with the standards of safety in making a safe design for entire system and to avoid situation in which a malfunction or failure., In developing a new designs, customer should ensure that the device which shown in this documents are used within specified operating ranges.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Paceleader for any infringements of patents or other rights of the third parties which may result from its use.