


Aug.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

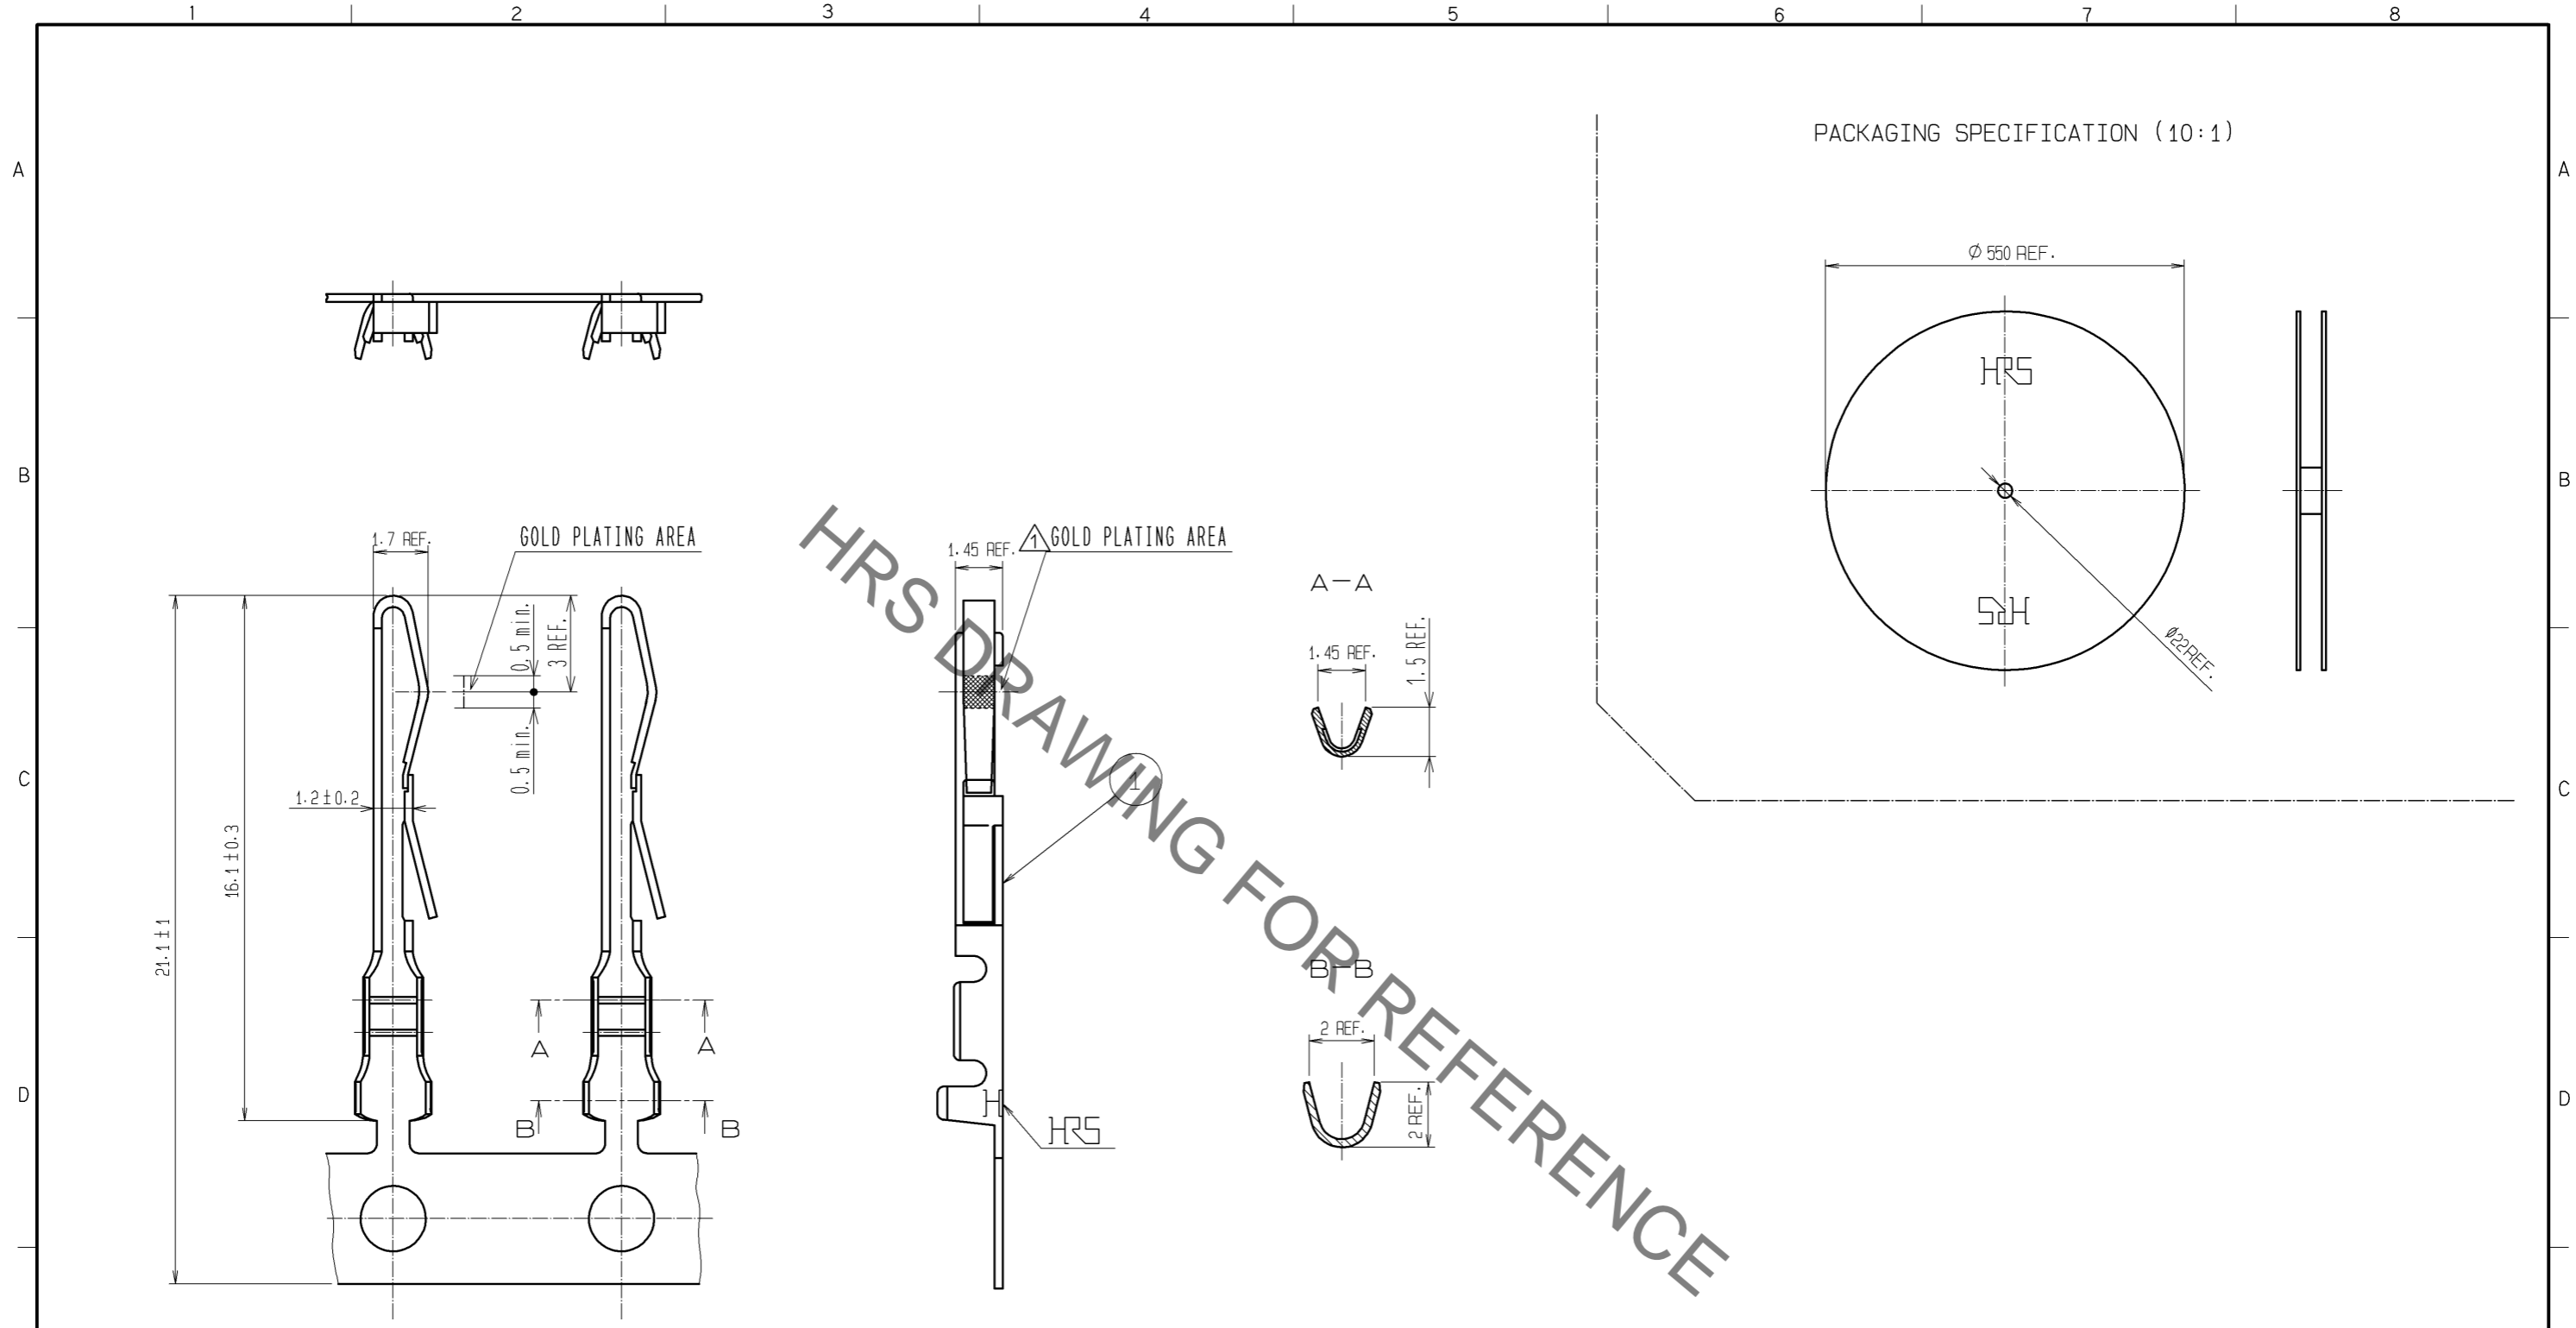

- NOTES 1. APPLICABLE WIRE SIZE : AWG #24 TO #28, UL1007  
 2. PER REEL : 8,000 CONTACTS  
 3. APPLICATION DEVICES AND APPLICATION REQUIREMENTS, CRIMP HEIGHT etc., SHALL BE SPECIFIED BY THE CABLE USED.

NO. 1		MATERIAL PHOSPHOR BRONZE		FINISH . REMARKS CONTACT AREA : GOLD PLATING 0.2μm MIN. UNDER PLATING : NICKEL PLATING 1μm MIN.			
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-E-003077	DESIGNED YH.MAMADA	CHECKED HO.MIWA	DATE 09.12.15
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : YH. ENAMI	09.09.30	DRAWING NO.	EDC3-027837-02		
		CHECKED : HO. MIWA	09.09.30	PART NO.	QR/P8-SC-221(12)		
		DESIGNED : HN. ANDO	09.09.29	CODE NO.	CL221-0174-9-12		
		DRAWN : HN. ANDO	09.09.29			1/1	