

General Description

It is mainly suitable for use as a load switch in battery powered applications.



FEATURES

- $V_{DSS} = -20V$, $I_D = -2.4A$.
- Drain to Source on-state Resistance.
 - : $R_{DS(ON)} = 100m$ (Max.) @ $V_{GS} = -4.5V$.
 - : $R_{DS(ON)} = 175m$ (Max.) @ $V_{GS} = -2.5V$.


MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Drain to Source Voltage		V_{DSS}	-20	V
Gate to Source Voltage		V_{GSS}	± 12	V
Drain Current	DC@Ta=25 (Note1)	I_D	-2.4	A
	Pulsed (Note1)	I_{DP}	-9	
Drain Power Dissipation	Ta=25 (Note1)	P_D	1.25	W
	Ta=100 (Note1)		0.6	
Maximum Junction Temperature		T_j	150	
Storage Temperature Range		T_{stg}	-55 ~ 150	
Thermal Resistance, Junction to Ambient (Note1)		R_{thJA}	100	/W

Note1) Surface Mounted on 1" x 1" FR4 Board, t = 5sec.

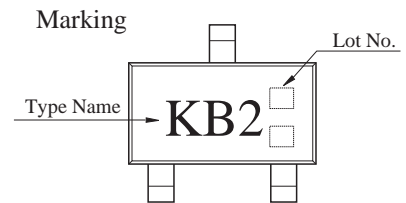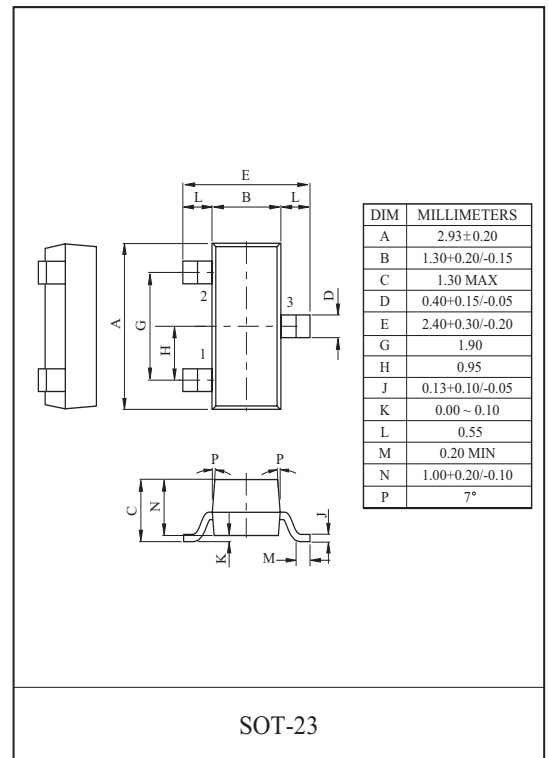

PIN CONNECTION (TOP VIEW)

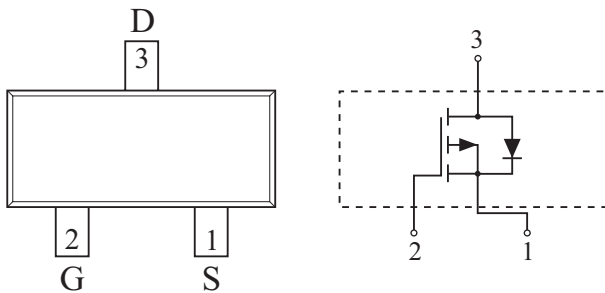

KMA2D4P20SA

ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Static						
Drain to Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=-250 \mu A$	-20	-	-	V
Drain Cut-off Current	I_{DSS}	$V_{GS}=0V, V_{DS}=-20V$	-	-	-1	μA
		$V_{GS}=0V, V_{DS}=-16V, T_j=70$	-	-	-5	
Gate to Source Leakage Current	I_{GSS}	$V_{GS}=\pm 12V, V_{DS}=0V$	-	-	± 100	nA
Gate to Source Threshold Voltage	V_{th}	$V_{DS}=V_{GS}, I_D=-250 \mu A$	-0.6	-	-1.5	V
Drain to Source On Resistance	$R_{DS(ON)}$	$V_{GS}=-4.5V, I_D=-2.4A$ (Note2)	-	83	100	m
		$V_{GS}=-2.5V, I_D=-1.8A$ (Note2)	-	145	175	
On State Drain Current	$I_{D(ON)}$	$V_{GS}=-4.5V, V_{DS}=-5V$ (Note2)	-9	-	-	A
Forward Transconductance	g_{fs}	$V_{DS}=-5V, I_D=-2.4A$ (Note2)	-	4	-	S
Dynamic						
Input Capacitance	C_{iss}	$V_{DS}=-15V, f=1MHz,$ $V_{GS}=0V$	-	292	-	pF
Output Capacitance	C_{oss}		-	60	-	
Reverse Transfer Capacitance	C_{rss}		-	33	-	
Total Gate Charge	Q_g	$V_{DS}=-15V, I_D=-2.4A,$ $V_{GS}=-4.5V$ (Note2)	-	4	-	nC
Gate to Source Charge	Q_{gs}		-	0.6	-	
Gate to Drain Charge	Q_{gd}		-	1.4	-	
Turn-on Delay time	$t_{d(on)}$	$V_{DD}=-15V, V_{GS}=-4.5V,$ $I_D=-2.4A, R_G=6$ (Note2)	-	6.5	-	ns
Turn-on Rise time	t_r		-	13	-	
Turn-off Delay time	$t_{d(off)}$		-	15	-	
Turn-off Fall time	t_f		-	20	-	
Source-Drain Diode Ratings						
Continuous Source Current	I_S	-	-	-	-2.4	A
Pulsed Source Current	I_{SP}	-	-	-	-9	A
Source to Drain Forward Voltage	V_{SD}	$V_{GS}=0V, I_S=-2.4A$ (Note2)	-	-	-1.3	V
Note2) Pulse Test : Pulse width <300 μs , Duty cycle < 2%						

Fig1. $I_D - V_{DS}$

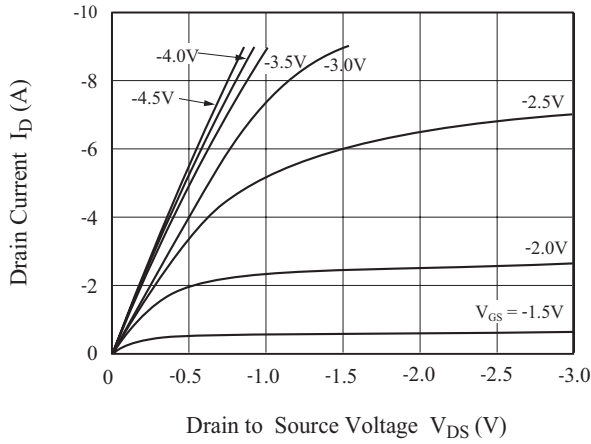


Fig2. $R_{DS(ON)} - I_D$

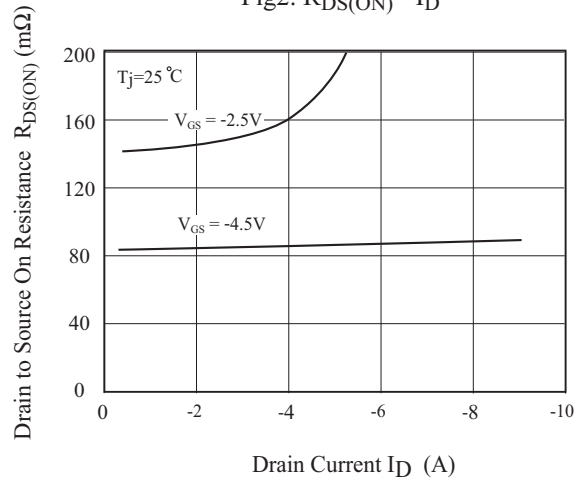


Fig3. $I_D - V_{GS}$

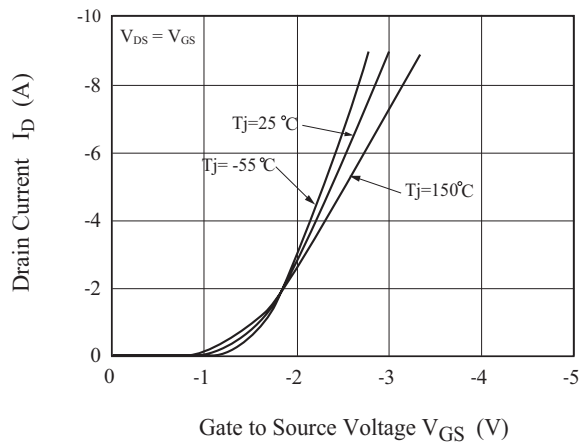


Fig4. $R_{DS(ON)} - T_j$

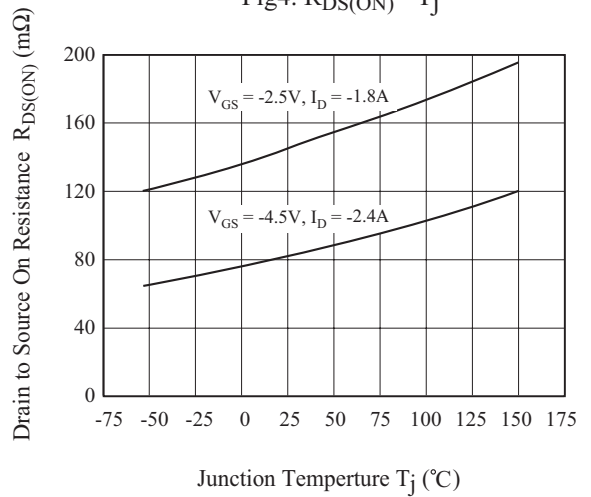


Fig5. $V_{th} - T_j$


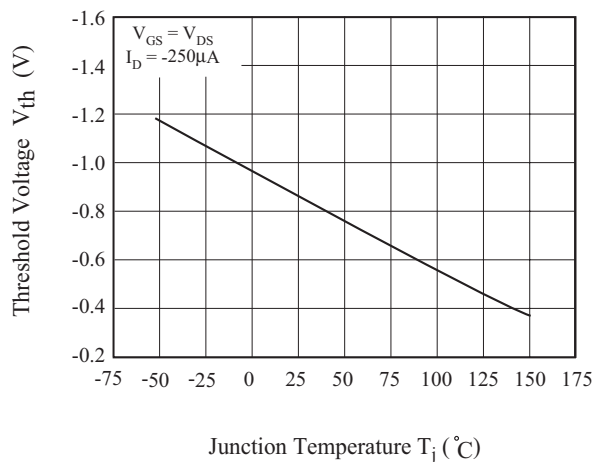


Fig6. $I_S - V_{SD}$

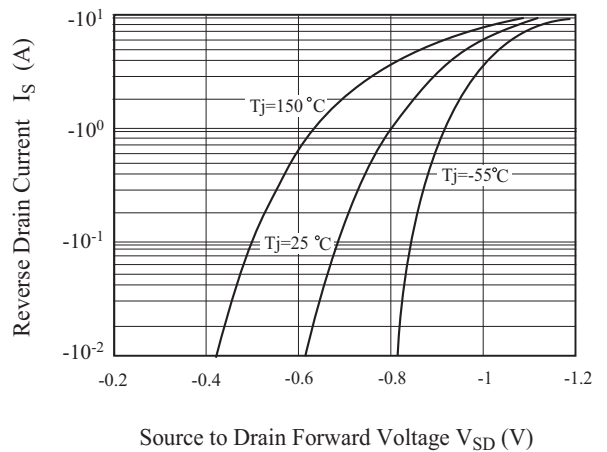

KMA2D4P20SA

Fig7. $R_{DS(ON)} - V_{GS}$

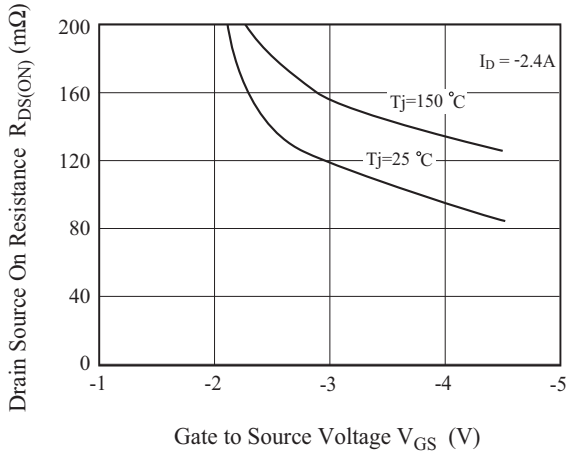


Fig8. $C - V_{DS}$

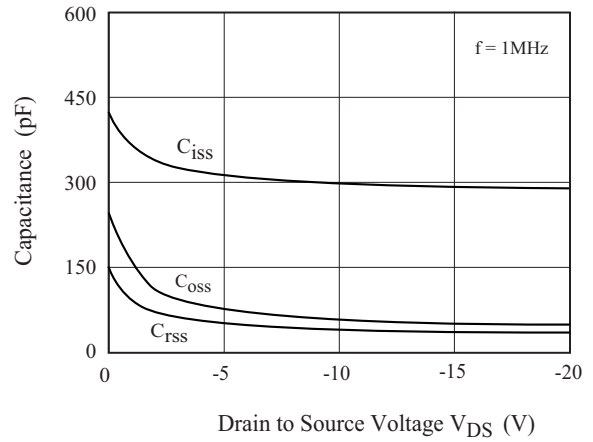


Fig7. $Q_g - V_{GS}$

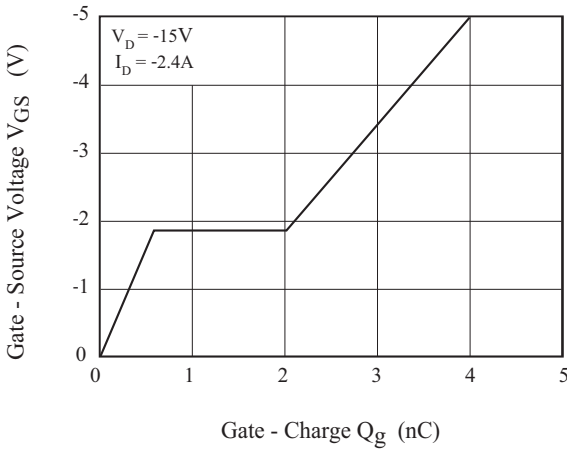


Fig9. Safe Operation Area

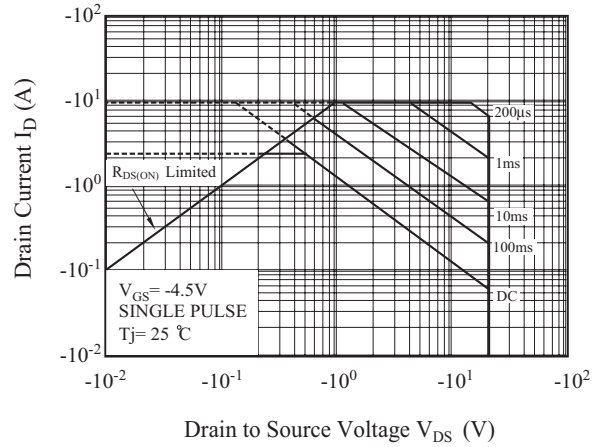


Fig10. Transient Thermal Response Curve

