


SBD Type : GSQ10A06B

OUTLINE DRAWING

FEATURES

- *Similar to TO-220AC Case
- *Low Forward Voltage Drop
- *Low Power Loss,High Efficiency
- *High Surge Capability
- *Tj=150 °C operation

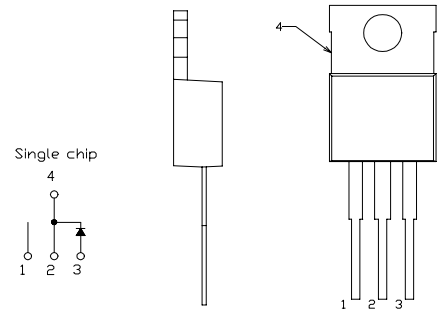

Maximum Ratings


Approx Net Weight: 1.9g

Rating	Symbol	GSQ10A06B		Unit
Repetitive Peak Reverse Voltage	V_{RRM}	60		V
Non-repetitive Peak Reverse Voltage	V_{RSM}	65		V
Average Rectified Output Current	I_O	10	$T_c=111^\circ\text{C}$ 50 Hz half Sine Wave Resistive Load	A
RMS Forward Current	$I_{F(RMS)}$	15.7		A
Surge Forward Current	I_{FSM}	150	50Hz Half Sine Wave ,1cycle Non-repetitive	A
Operating JunctionTemperature Range	T_{jw}	-40 to +150		°C
Storage Temperature Range	T_{stg}	-40 to +150		°C
Mounting torque	F_{tor}	recommended torque = 0.5		N•m



Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I_{RM}	$T_j= 25^\circ\text{C}, V_{RM}= V_{RRM}$	-	-	10	mA
Peak Forward Voltage	V_{FM}	$T_j= 25^\circ\text{C}, I_{FM}= 10 \text{ A}$	-	-	0.67	V
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	3	°C /W


GSQ10A06B OUTLINE DRAWING (Dimension in mm)

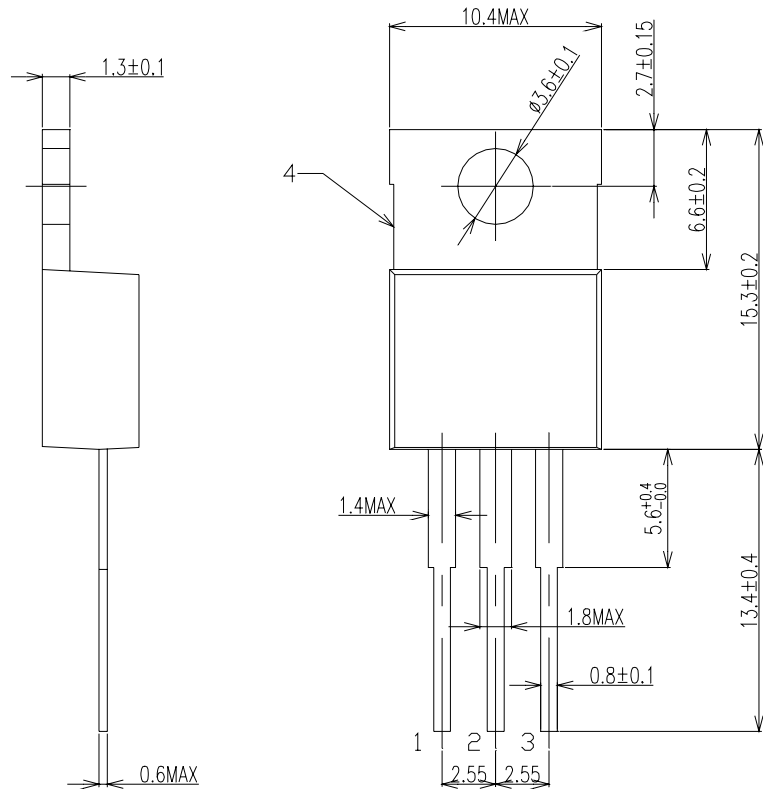


Single chip

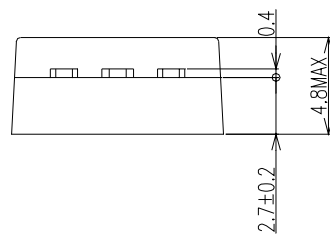

FORWARD CURRENT VS. VOLTAGE

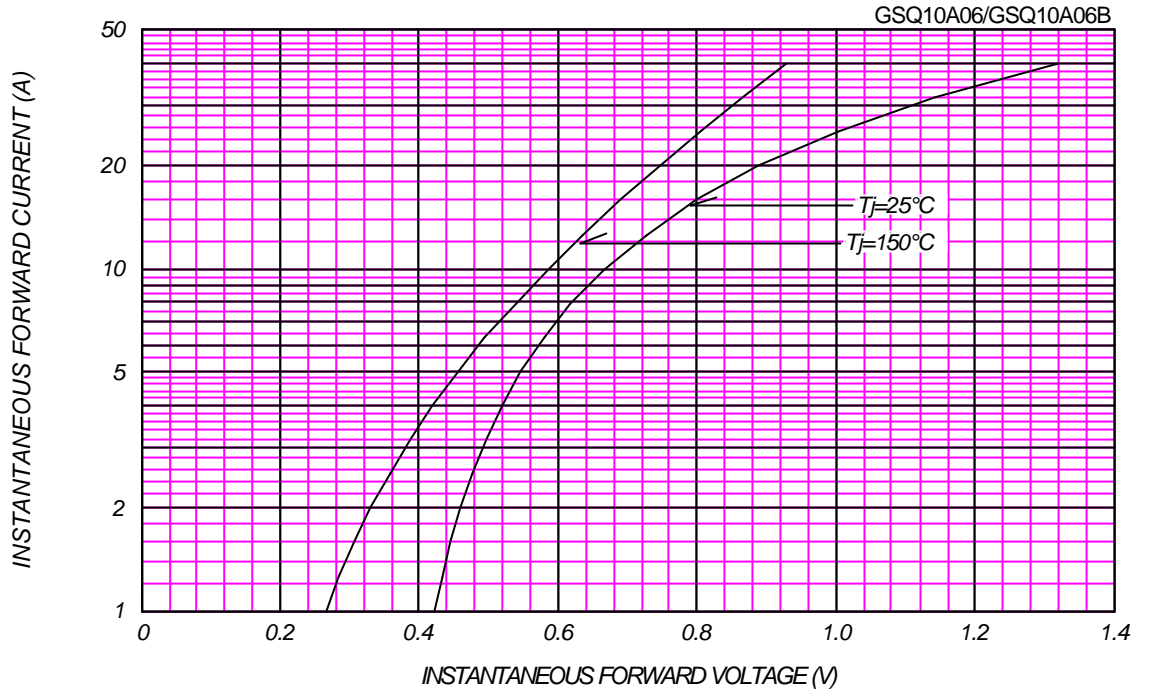


AVERAGE FORWARD POWER DISSIPATION

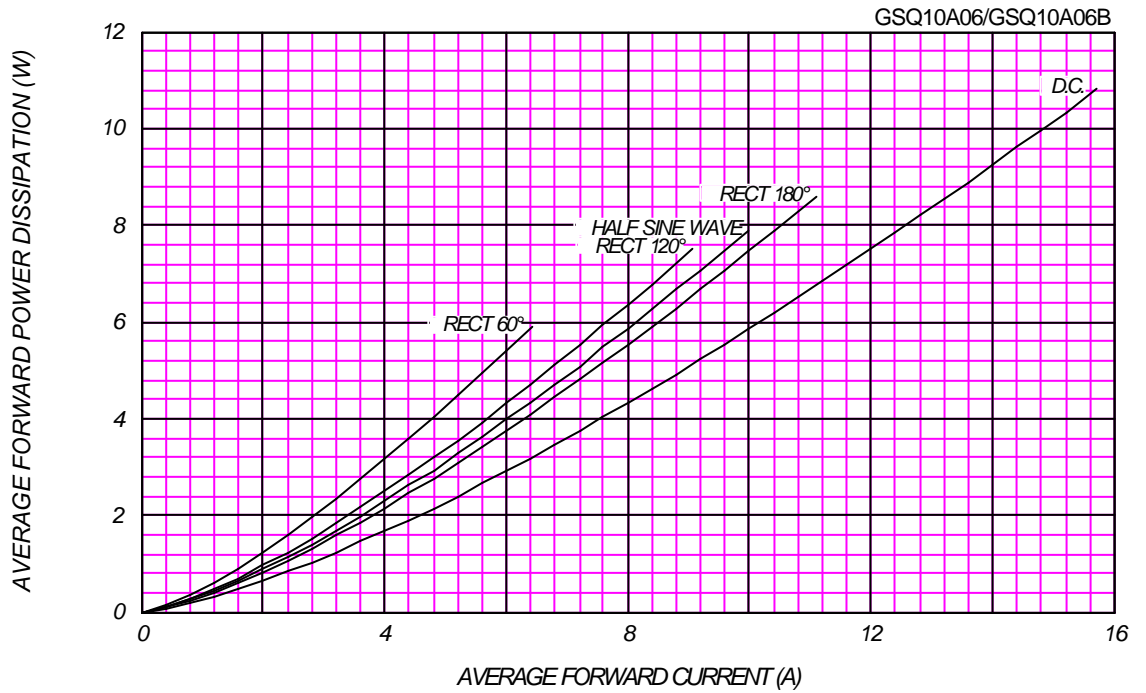

PEAK REVERSE CURRENT VS. PEAK REVERSE VOLTAGE


$T_j = 150\text{ }^\circ\text{C}$

GSQ10A06/GSQ10A06B

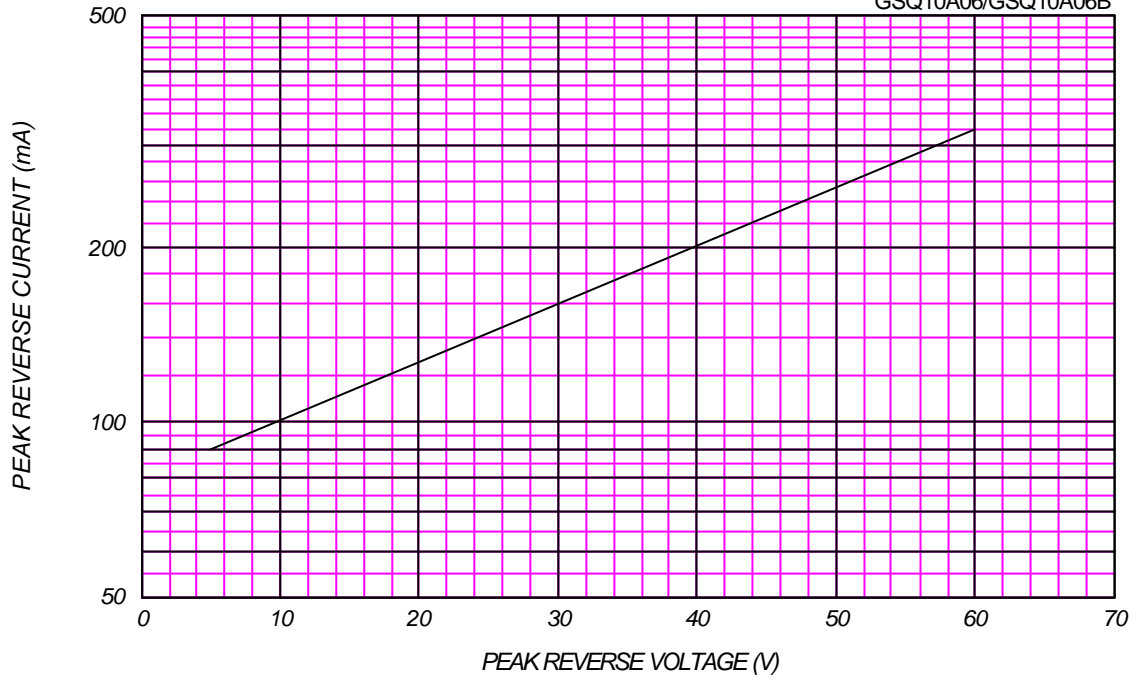

AVERAGE REVERSE POWER DISSIPATION

GSQ10A06/GSQ10A06B

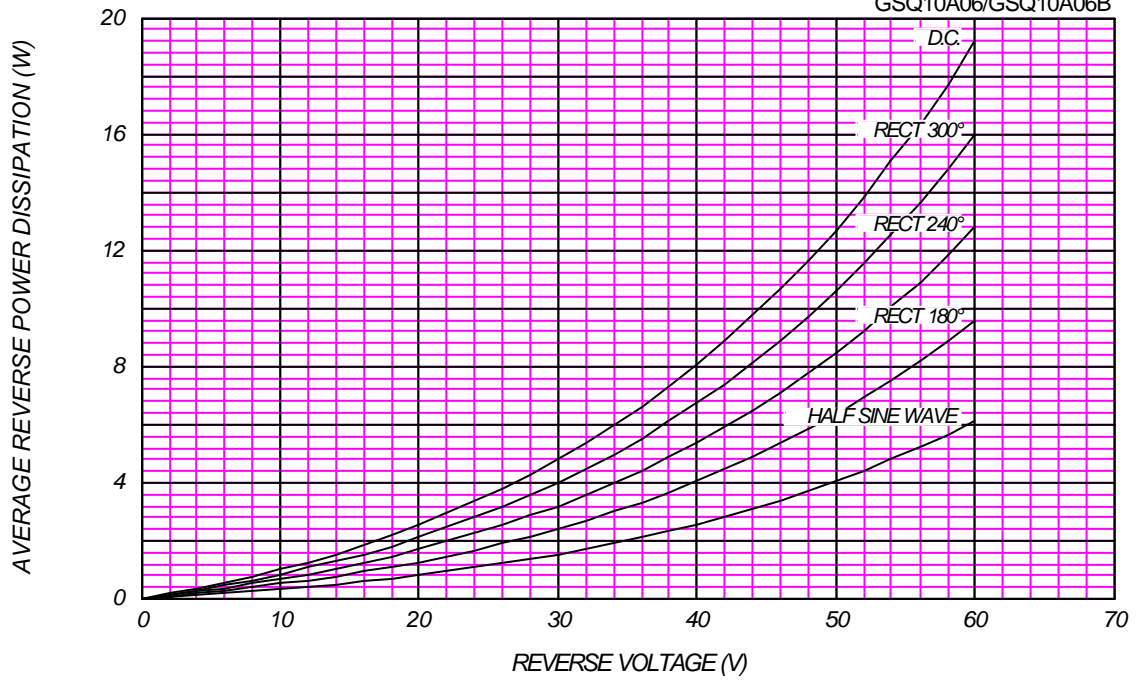




AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

$V_{RM}=60V$


GSQ10A06/GSQ10A06B

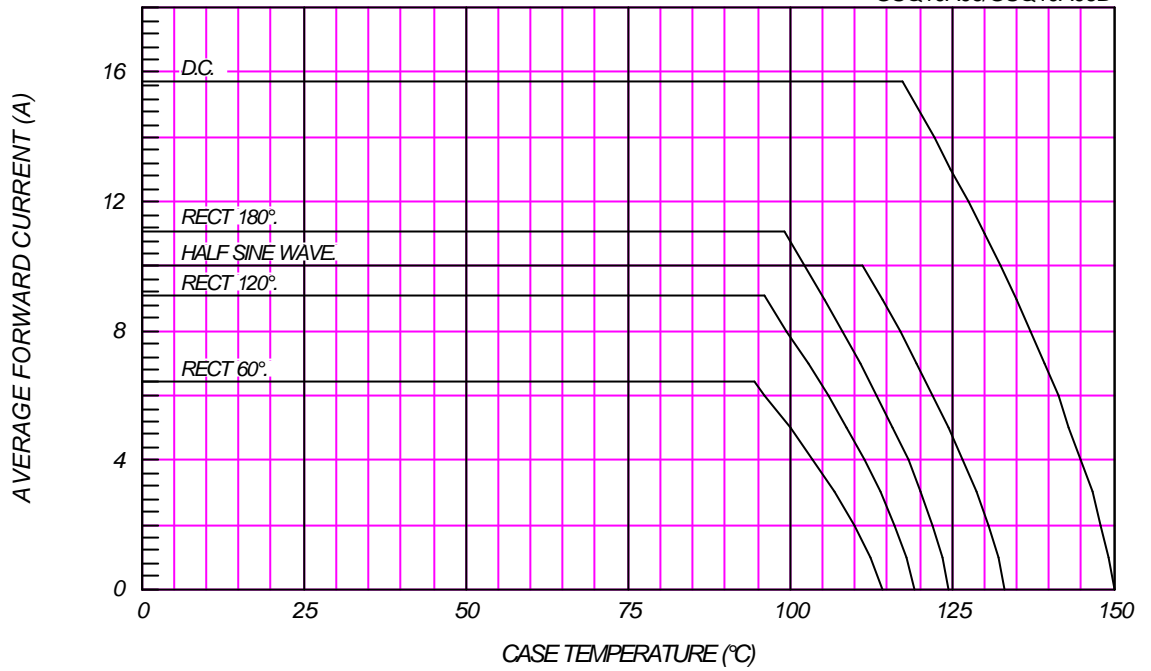

SURGE CURRENT RATINGS

$f=50Hz$, Half Sine Wave, Non-Repetitive, No Load

GSQ10A06/GSQ10A06B

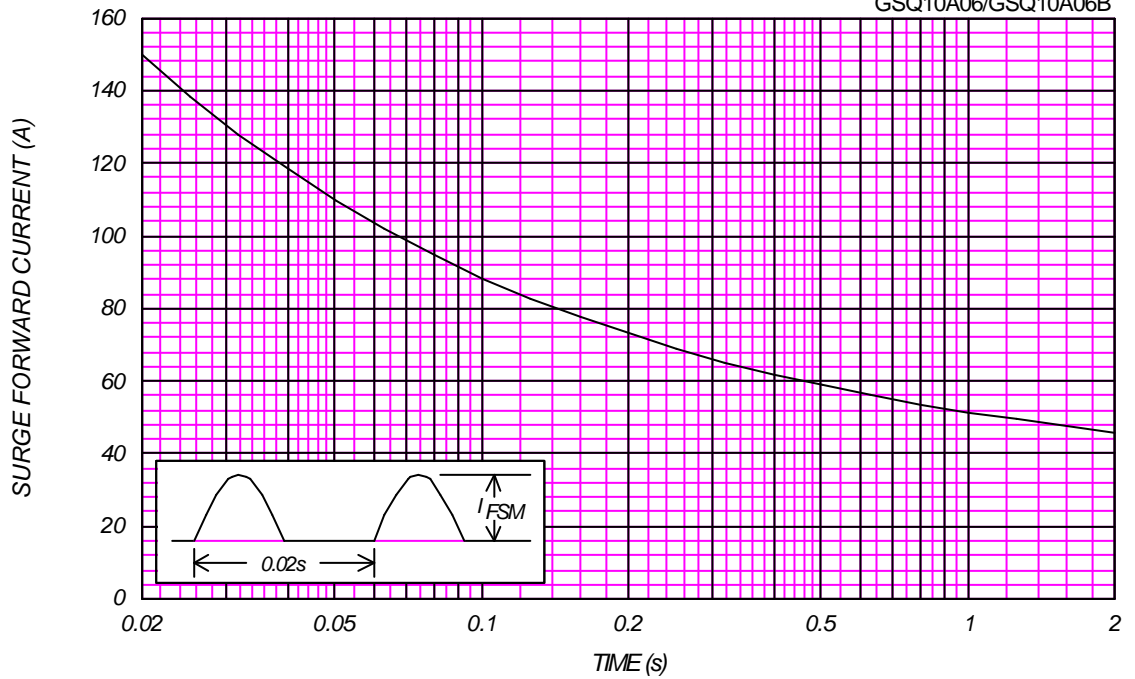

JUNCTION CAPACITANCE VS. REVERSE VOLTAGE

$T_j=25^\circ\text{C}$, $V_m=20\text{mV}_{\text{RMS}}$, $f=100\text{kHz}$, Typical Value

GSQ10A06/GSQ10A06B

