


Features

- Glass passivated chip
- 3000 W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle):0.01 %
- Low leakage
- Uni and Bidirectional unit
- Excellent clamping capability
- Very fast response time
- RoHS compliant

Mechanical Data

- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end except Bipolar
- Mounting position: Any

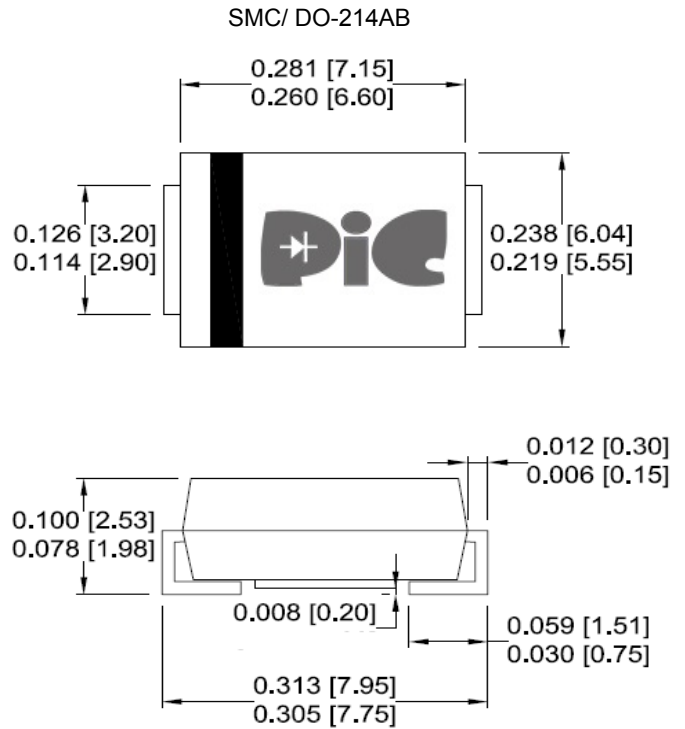

Dimensions: inch[mm]

Maximum Ratings($T_A=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|---|----------------|----------------|------------------|
| Peak power dissipation with a 10/1000 μ s waveform ⁽¹⁾ | P_{PP} | 3000 | W |
| Peak pulse current with a 10/1000 μ s waveform ⁽¹⁾ | I_{PP} | See Next Table | A |
| Power dissipation on infinite heatsink at $T_L = 75^\circ\text{C}$ | P_D | 6.5 | W |
| Peak forward surge current, 8.3 ms single half sine-wave unidirectional only ⁽²⁾ | I_{FSM} | 300 | A |
| Maximum instantaneous forward voltage at 100A for unidirectional only ⁽³⁾ | V_F | 3.5/5.0 | V |
| Operating junction and storage temperature range | T_J, T_{STG} | - 55 to +150 | $^\circ\text{C}$ |

Note:

(1)Non-repetitive current pulse per Fig.5 and derated above $T_A = 25^\circ\text{C}$ per Fig. 1

(2)Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

(3) $V_F < 3.5\text{V}$ for devices of $V_{BR} < 200\text{V}$ and $V_F < 5.0\text{V}$ for devices of $V_{BR} > 201\text{V}$

Ratings and Characteristics Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

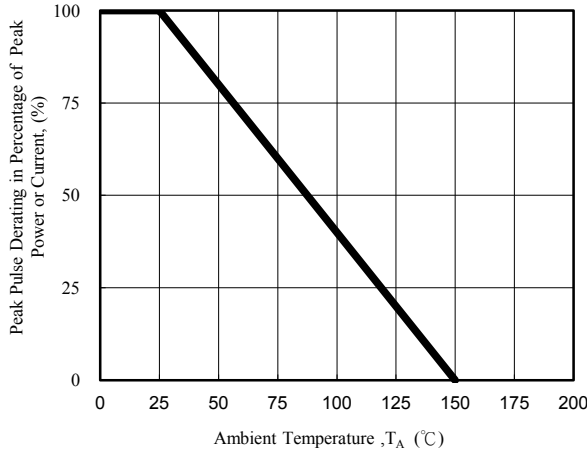


Fig. 1 - Pulse Derating Curve

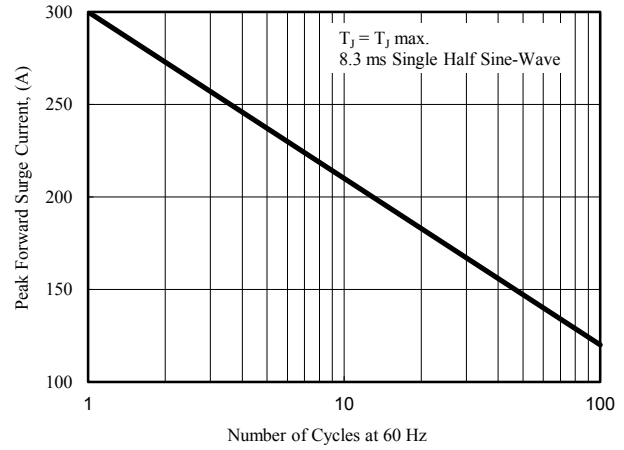


Fig. 2 - Maximum Non-Repetitive Surge Current

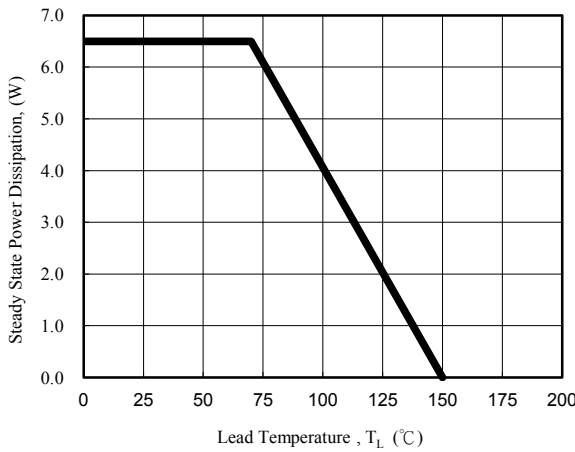


Fig. 3 - Steady State Power Derating Curve

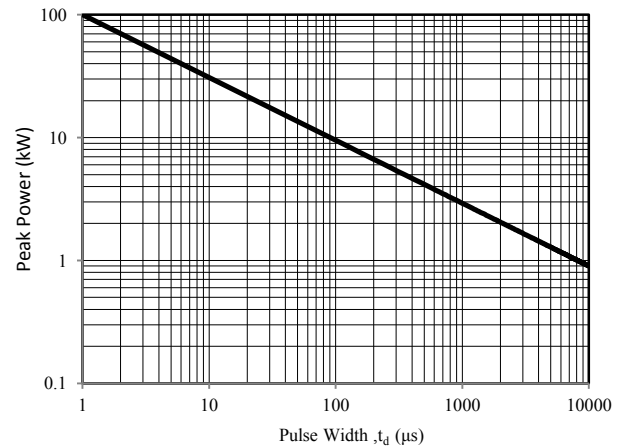


Fig. 4 - Peak Pulse Power Rating Curve

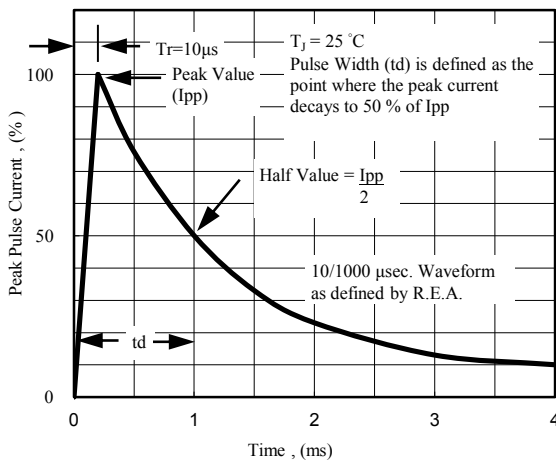


Fig. 5 - Pulse Waveform

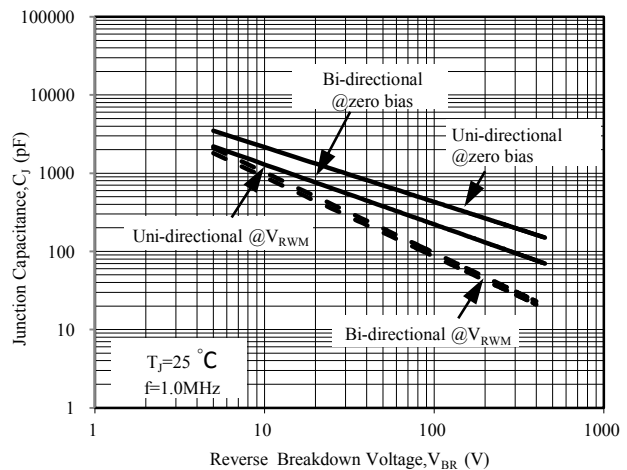


Fig. 6 - Typical Junction Capacitance



SMDJ5.0 THRU SMDJ440

Surface Mount Transient Voltage Suppressors

Working Voltage:5.0 to 440V Peak

Pulse Power:3000W

Electrical Characteristics(T_A=25°C unless otherwise noted)

| Part Number (Uni) | Part Number (Bi) | Device Marking Code | | Breakdown Voltage V _{BR} @I _T | | | Maximum Reverse Leakage I _R @V _{RWM} (uA) | Working Peak Reverse Voltage V _{RWM} (V) | Maximum Reverse Surge Current I _{PP} (A) | Maximum Clamping Voltage V _C @I _{PP} (V) |
|-------------------|------------------|---------------------|-----|---|---------|---------------------|---|---|---|--|
| | | Uni | Bi | Min (V) | Max (V) | I _T (mA) | | | | |
| SMDJ5.0 | SMDJ5.0C | RDD | DDD | 6.40 | 7.30 | 10 | 800 | 5.0 | 312.50 | 9.6 |
| SMDJ5.0A | SMDJ5.0CA | RDE | DDE | 6.40 | 7.00 | 10 | 800 | 5.0 | 326.09 | 9.2 |
| SMDJ6.0 | SMDJ6.0C | RDF | DDF | 6.67 | 8.15 | 10 | 800 | 6.0 | 263.16 | 11.4 |
| SMDJ6.0A | SMDJ6.0CA | RDG | DDG | 6.67 | 7.37 | 10 | 800 | 6.0 | 291.26 | 10.3 |
| SMDJ6.5 | SMDJ6.5C | RDH | DDH | 7.22 | 8.82 | 10 | 500 | 6.5 | 243.90 | 12.3 |
| SMDJ6.5A | SMDJ6.5CA | RDK | DDK | 7.22 | 7.98 | 10 | 500 | 6.5 | 267.86 | 11.2 |
| SMDJ7.0 | SMDJ7.0C | RDL | DDL | 7.78 | 9.51 | 10 | 200 | 7.0 | 225.56 | 13.3 |
| SMDJ7.0A | SMDJ7.0CA | PDM | DDM | 7.78 | 8.60 | 10 | 200 | 7.0 | 250.00 | 12.0 |
| SMDJ7.5 | SMDJ7.5C | PDN | DDN | 8.33 | 10.20 | 1 | 100 | 7.5 | 209.79 | 14.3 |
| SMDJ7.5A | SMDJ7.5CA | PDP | DDP | 8.33 | 9.21 | 1 | 100 | 7.5 | 232.56 | 12.9 |
| SMDJ8.0 | SMDJ8.0C | PDQ | DDQ | 8.89 | 10.90 | 1 | 50 | 8.0 | 200.00 | 15.0 |
| SMDJ8.0A | SMDJ8.0CA | PDR | DDR | 8.89 | 9.83 | 1 | 50 | 8.0 | 220.59 | 13.6 |
| SMDJ8.5 | SMDJ8.5C | PDS | DDS | 9.44 | 11.50 | 1 | 20 | 8.5 | 188.68 | 15.9 |
| SMDJ8.5A | SMDJ8.5CA | PDT | DDT | 9.44 | 10.40 | 1 | 20 | 8.5 | 208.33 | 14.4 |
| SMDJ9.0 | SMDJ9.0C | PDU | DDU | 10.00 | 12.20 | 1 | 10 | 9.0 | 177.51 | 16.9 |
| SMDJ9.0A | SMDJ9.0CA | PDV | DDV | 10.00 | 11.10 | 1 | 10 | 9.0 | 194.81 | 15.4 |
| SMDJ10 | SMDJ10C | PDW | DDW | 11.10 | 13.60 | 1 | 5 | 10.0 | 159.57 | 18.8 |
| SMDJ10A | SMDJ10CA | PDX | DDX | 11.10 | 12.30 | 1 | 5 | 10.0 | 176.47 | 17.0 |
| SMDJ11 | SMDJ11C | PDY | DDY | 12.20 | 14.90 | 1 | 2 | 11.0 | 149.25 | 20.1 |
| SMDJ11A | SMDJ11CA | PDZ | DDZ | 12.20 | 13.50 | 1 | 2 | 11.0 | 164.84 | 18.2 |
| SMDJ12 | SMDJ12C | PED | DED | 13.30 | 16.30 | 1 | 2 | 12.0 | 136.36 | 22.0 |
| SMDJ12A | SMDJ12CA | PEE | DEE | 13.30 | 14.70 | 1 | 2 | 12.0 | 150.75 | 19.9 |
| SMDJ13 | SMDJ13C | PEF | DEF | 14.40 | 17.60 | 1 | 2 | 13.0 | 126.05 | 23.8 |
| SMDJ13A | SMDJ13CA | PEG | DEG | 14.40 | 15.90 | 1 | 2 | 13.0 | 139.53 | 21.5 |
| SMDJ14 | SMDJ14C | PEH | DEH | 15.60 | 19.10 | 1 | 2 | 14.0 | 116.28 | 25.8 |
| SMDJ14A | SMDJ14CA | PEK | DEK | 15.60 | 17.20 | 1 | 2 | 14.0 | 129.31 | 23.2 |
| SMDJ15 | SMDJ15C | PEL | DEL | 16.70 | 20.40 | 1 | 2 | 15.0 | 111.52 | 26.9 |
| SMDJ15A | SMDJ15CA | PEM | DEM | 16.70 | 18.50 | 1 | 2 | 15.0 | 122.95 | 24.4 |
| SMDJ16 | SMDJ16C | PEN | DEN | 17.80 | 21.80 | 1 | 2 | 16.0 | 104.17 | 28.8 |
| SMDJ16A | SMDJ16CA | PEP | DEP | 17.80 | 19.70 | 1 | 2 | 16.0 | 115.38 | 26.0 |
| SMDJ17 | SMDJ17C | PEQ | DEQ | 18.90 | 23.10 | 1 | 2 | 17.0 | 98.36 | 30.5 |
| SMDJ17A | SMDJ17CA | PER | DER | 18.90 | 20.90 | 1 | 2 | 17.0 | 108.70 | 27.6 |
| SMDJ18 | SMDJ18C | PES | DES | 20.00 | 24.40 | 1 | 2 | 18.0 | 93.17 | 32.2 |
| SMDJ18A | SMDJ18CA | PET | DET | 20.00 | 22.10 | 1 | 2 | 18.0 | 102.74 | 29.2 |
| SMDJ19 | SMDJ19C | PEA | DEA | 21.13 | 25.76 | 1 | 2 | 19.0 | 88.21 | 34.0 |
| SMDJ19A | SMDJ19CA | PEB | DEB | 21.10 | 23.30 | 1 | 2 | 19.0 | 97.47 | 30.8 |
| SMDJ20 | SMDJ20C | PEU | DEU | 22.20 | 27.10 | 1 | 2 | 20.0 | 83.80 | 35.8 |
| SMDJ20A | SMDJ20CA | PEV | DEV | 22.20 | 24.50 | 1 | 2 | 20.0 | 92.59 | 32.4 |
| SMDJ22 | SMDJ22C | PEW | DEW | 24.40 | 29.80 | 1 | 2 | 22.0 | 76.14 | 39.4 |
| SMDJ22A | SMDJ22CA | PEX | DEX | 24.40 | 26.90 | 1 | 2 | 22.0 | 84.51 | 35.5 |
| SMDJ24 | SMDJ24C | PEY | DEY | 26.70 | 32.60 | 1 | 2 | 24.0 | 69.77 | 43.0 |
| SMDJ24A | SMDJ24CA | PEZ | DEZ | 26.70 | 29.50 | 1 | 2 | 24.0 | 77.12 | 38.9 |
| SMDJ26 | SMDJ26C | PFD | DFD | 28.90 | 35.30 | 1 | 2 | 26.0 | 64.38 | 46.6 |
| SMDJ26A | SMDJ26CA | PFE | DFE | 28.90 | 31.90 | 1 | 2 | 26.0 | 71.26 | 42.1 |
| SMDJ28 | SMDJ28C | PFF | DFE | 31.10 | 38.00 | 1 | 2 | 28.0 | 60.00 | 50.0 |
| SMDJ28A | SMDJ28CA | PFG | DFG | 31.10 | 34.40 | 1 | 2 | 28.0 | 66.08 | 45.4 |
| SMDJ30 | SMDJ30C | PFH | DFH | 33.30 | 40.70 | 1 | 2 | 30.0 | 56.07 | 53.5 |
| SMDJ30A | SMDJ30CA | PFK | DFK | 33.30 | 36.80 | 1 | 2 | 30.0 | 61.98 | 48.4 |
| SMDJ33 | SMDJ33C | PFL | DFL | 36.70 | 44.90 | 1 | 2 | 33.0 | 50.85 | 59.0 |
| SMDJ33A | SMDJ33CA | PFM | DFM | 36.70 | 40.60 | 1 | 2 | 33.0 | 56.29 | 53.3 |
| SMDJ36 | SMDJ36C | PFN | DFN | 40.00 | 48.90 | 1 | 2 | 36.0 | 46.66 | 64.3 |
| SMDJ36A | SMDJ36CA | PFP | DFP | 40.00 | 44.20 | 1 | 2 | 36.0 | 51.64 | 58.1 |

Note: 1. Suffix 'A' denotes 5% tolerance device. Without 'A' denotes 10% tolerance device
 2. Add suffix 'C' or 'CA' after part number to specify Bi-directional devices
 3. For Bi-Directional devices having V_R of 10 volts and under, the I_R limit is dou




SMDJ5.0 THRU SMDJ440

Surface Mount Transient Voltage Suppressors
Working Voltage:5.0 to 440V Peak
Pulse Power:3000W

Electrical Characteristics($T_A=25^\circ\text{C}$ unless otherwise noted)

| Part Number (Uni) | Part Number (Bi) | Device Marking Code | | Breakdown Voltage V_{BR} @ I_T | | | Maximum Reverse Leakage I_R @ V_{RWM} (μA) | Working Peak Reverse Voltage V_{RWM} (V) | Maximum Reverse Surge Current I_{PP} (A) | Maximum Clamping Voltage V_C @ I_{PP} (V) |
|-------------------|------------------|---------------------|-----|------------------------------------|---------|------------|---|--|--|---|
| | | Uni | Bi | Min (V) | Max (V) | I_T (mA) | | | | |
| SMDJ40 | SMDJ40C | PFQ | DFQ | 44.40 | 54.30 | 1 | 2 | 40.0 | 42.02 | 71.4 |
| SMDJ40A | SMDJ40CA | PFR | DFR | 44.40 | 49.10 | 1 | 2 | 40.0 | 46.51 | 64.5 |
| SMDJ43 | SMDJ43C | PFS | DFS | 47.80 | 58.40 | 1 | 2 | 43.0 | 39.11 | 76.7 |
| SMDJ43A | SMDJ43CA | PFT | DFT | 47.80 | 52.80 | 1 | 2 | 43.0 | 43.23 | 69.4 |
| SMDJ45 | SMDJ45C | PFU | DFU | 50.00 | 61.10 | 1 | 2 | 45.0 | 37.36 | 80.3 |
| SMDJ45A | SMDJ45CA | PFV | DFV | 50.00 | 55.30 | 1 | 2 | 45.0 | 41.27 | 72.7 |
| SMDJ48 | SMDJ48C | PFW | DFW | 53.30 | 65.10 | 1 | 2 | 48.0 | 35.09 | 85.5 |
| SMDJ48A | SMDJ48CA | PFX | DFX | 53.30 | 58.90 | 1 | 2 | 48.0 | 38.76 | 77.4 |
| SMDJ51 | SMDJ51C | PFY | DFY | 56.70 | 69.30 | 1 | 2 | 51.0 | 32.93 | 91.1 |
| SMDJ51A | SMDJ51CA | PFZ | DFZ | 56.70 | 62.70 | 1 | 2 | 51.0 | 36.41 | 82.4 |
| SMDJ54 | SMDJ54C | RGD | DGD | 60.00 | 73.30 | 1 | 2 | 54.0 | 31.15 | 96.3 |
| SMDJ54A | SMDJ54CA | RGE | DGE | 60.00 | 66.30 | 1 | 2 | 54.0 | 34.44 | 87.1 |
| SMDJ58 | SMDJ58C | RGF | DGF | 64.40 | 78.70 | 1 | 2 | 58.0 | 29.13 | 103.0 |
| SMDJ58A | SMDJ58CA | PGG | DGG | 64.40 | 71.20 | 1 | 2 | 58.0 | 32.05 | 93.6 |
| SMDJ60 | SMDJ60C | RGH | DGH | 66.70 | 81.50 | 1 | 2 | 60.0 | 28.04 | 107.0 |
| SMDJ60A | SMDJ60CA | PGK | DGK | 66.70 | 73.70 | 1 | 2 | 60.0 | 30.99 | 96.8 |
| SMDJ64 | SMDJ64C | PGL | DGL | 71.10 | 86.90 | 1 | 2 | 64.0 | 26.32 | 114.0 |
| SMDJ64A | SMDJ64CA | PGM | DGM | 71.10 | 78.60 | 1 | 2 | 64.0 | 29.13 | 103.0 |
| SMDJ70 | SMDJ70C | PGN | DGN | 77.80 | 95.10 | 1 | 2 | 70.0 | 24.00 | 125.0 |
| SMDJ70A | SMDJ70CA | PGP | DGP | 77.80 | 86.00 | 1 | 2 | 70.0 | 26.55 | 113.0 |
| SMDJ75 | SMDJ75C | PGQ | DGQ | 83.30 | 102.00 | 1 | 2 | 75.0 | 22.39 | 134.0 |
| SMDJ75A | SMDJ75CA | PGR | DGR | 83.30 | 92.10 | 1 | 2 | 75.0 | 24.79 | 121.0 |
| SMDJ78 | SMDJ78C | PGS | DGS | 86.70 | 106.00 | 1 | 2 | 78.0 | 21.58 | 139.0 |
| SMDJ78A | SMDJ78CA | PGT | DGT | 86.70 | 95.80 | 1 | 2 | 78.0 | 23.81 | 126.0 |
| SMDJ80 | SMDJ80C | PGA | DGA | 88.96 | 108.80 | 1 | 2 | 80.0 | 20.95 | 143.2 |
| SMDJ80A | SMDJ80CA | PGB | DGB | 88.80 | 97.60 | 1 | 2 | 80.0 | 23.15 | 129.6 |
| SMDJ85 | SMDJ85C | PGU | DGU | 94.40 | 115.00 | 1 | 2 | 85.0 | 19.87 | 151.0 |
| SMDJ85A | SMDJ85CA | PGV | DGV | 94.40 | 104.00 | 1 | 2 | 85.0 | 21.90 | 137.0 |
| SMDJ90 | SMDJ90C | PGW | DGW | 100.00 | 122.00 | 1 | 2 | 90.0 | 18.75 | 160.0 |
| SMDJ90A | SMDJ90CA | PGX | DGX | 100.00 | 111.00 | 1 | 2 | 90.0 | 20.55 | 146.0 |
| SMDJ100 | SMDJ100C | PGY | DGY | 111.00 | 136.00 | 1 | 2 | 100.0 | 16.76 | 179.0 |
| SMDJ100A | SMDJ100CA | PGZ | DGZ | 111.00 | 123.00 | 1 | 2 | 100.0 | 18.52 | 162.0 |
| SMDJ110 | SMDJ110C | PHD | DHD | 122.00 | 149.00 | 1 | 2 | 110.0 | 15.31 | 196.0 |
| SMDJ110A | SMDJ110CA | PHE | DHE | 122.00 | 135.00 | 1 | 2 | 110.0 | 16.95 | 177.0 |
| SMDJ120 | SMDJ120C | PHF | DHF | 133.00 | 163.00 | 1 | 2 | 120.0 | 14.02 | 214.0 |
| SMDJ120A | SMDJ120CA | PHG | DHG | 133.00 | 147.00 | 1 | 2 | 120.0 | 15.54 | 193.0 |
| SMDJ130 | SMDJ130C | PHH | DHH | 144.00 | 176.00 | 1 | 2 | 130.0 | 12.99 | 231.0 |
| SMDJ130A | SMDJ130CA | PHK | DHK | 144.00 | 159.00 | 1 | 2 | 130.0 | 14.35 | 209.0 |
| SMDJ140 | SMDJ140C | PHA | DHA | 155.68 | 190.40 | 1 | 2 | 140.0 | 11.97 | 250.6 |
| SMDJ140A | SMDJ140CA | PHB | DHB | 155.00 | 171.00 | 1 | 2 | 140.0 | 13.23 | 226.8 |
| SMDJ150 | SMDJ150C | PHL | DHL | 167.00 | 204.00 | 1 | 2 | 150.0 | 11.19 | 268.0 |
| SMDJ150A | SMDJ150CA | PHM | DHM | 167.00 | 185.00 | 1 | 2 | 150.0 | 12.35 | 243.0 |
| SMDJ160 | SMDJ160C | PHN | DHN | 178.00 | 218.00 | 1 | 2 | 160.0 | 10.45 | 287.0 |
| SMDJ160A | SMDJ160CA | PHP | DHP | 178.00 | 197.00 | 1 | 2 | 160.0 | 11.58 | 259.0 |
| SMDJ170 | SMDJ170C | PHQ | DHQ | 189.00 | 231.00 | 1 | 2 | 170.0 | 9.87 | 304.0 |
| SMDJ170A | SMDJ170CA | PHR | DHR | 189.00 | 209.00 | 1 | 2 | 170.0 | 10.91 | 275.0 |
| SMDJ180 | SMDJ180C | PHS | DHS | 200.16 | 244.80 | 1 | 2 | 180.0 | 9.31 | 322.2 |
| SMDJ180A | SMDJ180CA | PHT | DHT | 200.00 | 220.00 | 1 | 2 | 180.0 | 10.29 | 291.6 |
| SMDJ190 | SMDJ190C | PHU | DHU | 211.28 | 258.40 | 1 | 2 | 190.0 | 8.82 | 340.1 |
| SMDJ190A | SMDJ190CA | PHV | DHV | 211.00 | 232.00 | 1 | 2 | 190.0 | 9.75 | 307.8 |
| SMDJ200A | SMDJ200CA | PHW | DHW | 224.00 | 247.00 | 1 | 2 | 200.0 | 9.26 | 324.0 |
| SMDJ220A | SMDJ220CA | PHX | DHX | 246.00 | 272.00 | 1 | 2 | 220.0 | 8.43 | 356.0 |
| SMDJ250A | SMDJ250CA | PHZ | DHZ | 279.00 | 309.00 | 1 | 2 | 250.0 | 7.41 | 405.0 |
| SMDJ300A | SMDJ300CA | PJE | DJE | 335.00 | 371.00 | 1 | 2 | 300.0 | 6.17 | 486.0 |
| SMDJ350A | SMDJ350CA | PJG | DJG | 391.00 | 432.00 | 1 | 2 | 350.0 | 5.29 | 567.0 |
| SMDJ400A | SMDJ400CA | PJK | DJK | 447.00 | 494.00 | 1 | 2 | 400.0 | 4.63 | 648.0 |
| SMDJ440A | SMDJ440CA | PJM | DJM | 492.00 | 543.00 | 1 | 2 | 440.0 | 4.21 | 713.0 |

Recommend IR Reflow Soldering Thermal Profile

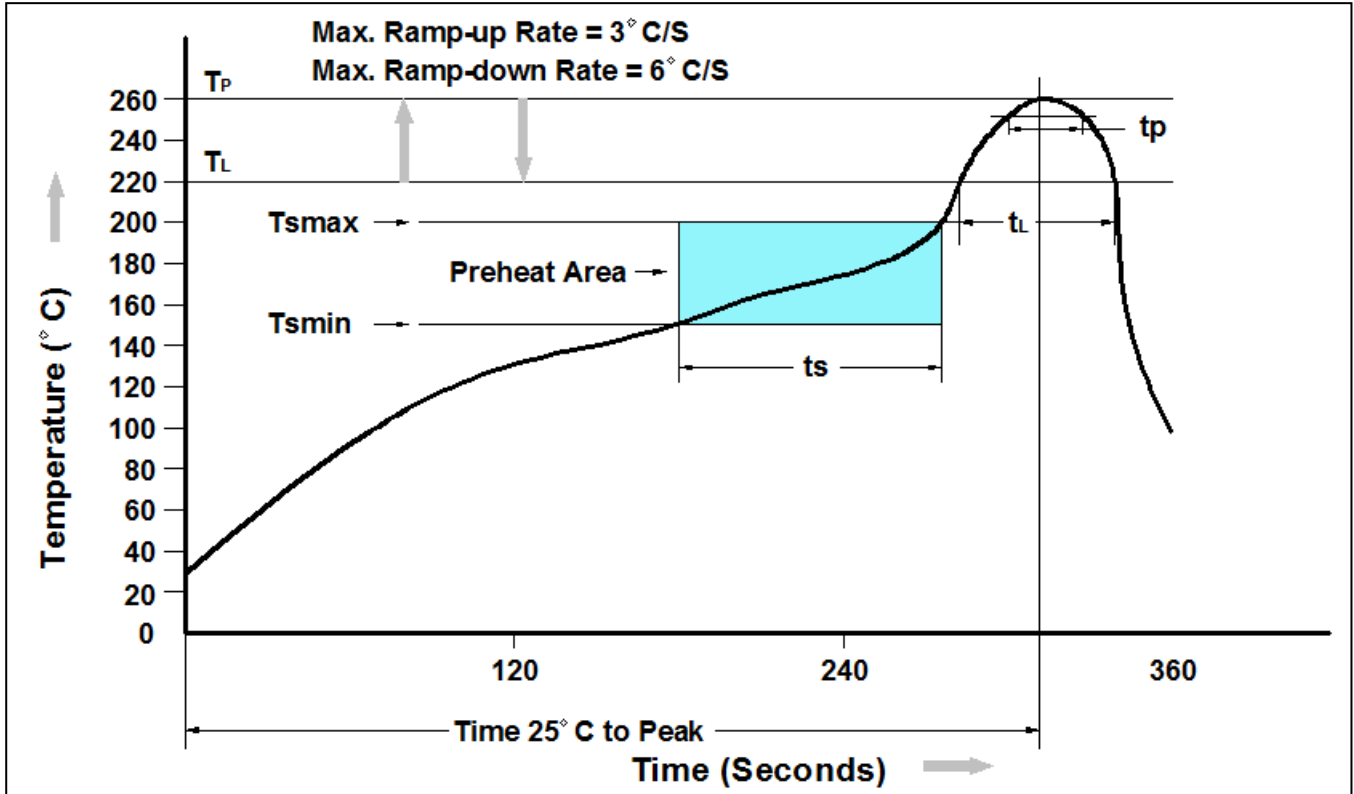

| Profile Feature | Pb-Free Assembly Profile |
|--|--------------------------|
| Temperature Min. (T_{smin}) | 150°C |
| Temperature Max. (T_{smax}) | 200°C |
| Time (t_s) from (T_{smin} to T_{smax}) | 60-120 seconds |
| Average Ramp-up Rate (t_L to t_P) | 3°C/second max. |
| Liquidous Temperature (T_L) | 217°C |
| Time (t_L) Maintained Above (T_L) | 60 – 150 seconds |
| Peak Temperature | 260°C +0°C / -5°C |
| Time (t_P) within 5°C of actual Peak Temperature | 30 seconds |
| Ramp-down Rate (T_P to T_L) | 6°C/second max |
| Time 25°C to Peak Temperature | 8 minutes max. |

Ordering Information

| Part Number | Description | Quantity |
|-----------------|-------------|----------|
| SMDJ5.0~SMDJ440 | SMC / TR | 3000 pcs |



SMDJ5.0 THRU SMDJ440

Surface Mount Transient Voltage Suppressors

Working Voltage:5.0 to 440V Peak

Pulse Power:3000W

DISCLAIMER

- The information in this document and any product described herein are subject to change without notice and should not be construed as a commitment by Paceleader, Paceleader reserve the right to make changes to the information in this document.
- Though Paceleader make effort to improve product quality and reliability, Product can malfunction and fail due to their inherent electrical sensitivity and vulnerability to physical stress, it is the responsibility of the customer, when utilizing Paceleader products, to comply with the standards of safety in making a safe design for entire system and to avoid situation in which a malfunction or failure., In developing a new designs, customer should ensure that the device which shown in this documents are used within specified operatingranges.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Paceleader for any infringements of patents or other rights of the third parties which may result from its use.