


Aug.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

A 7 8


RECOMMENDED P.C.B. HOLE PATTERN (t=1.6±0.1)

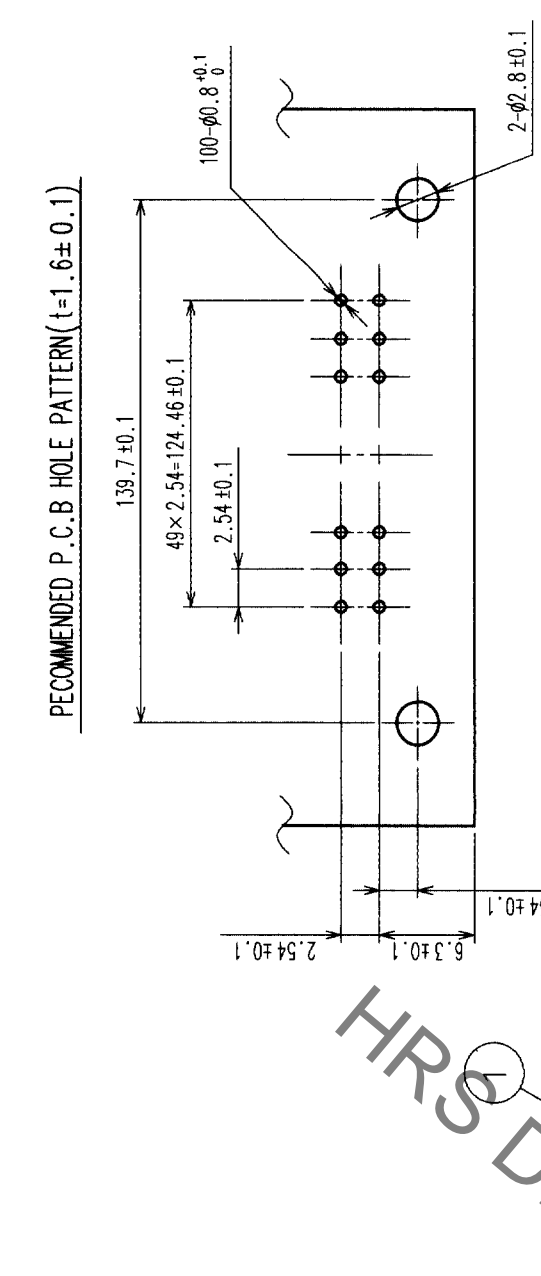


1 2 3 4 5 6

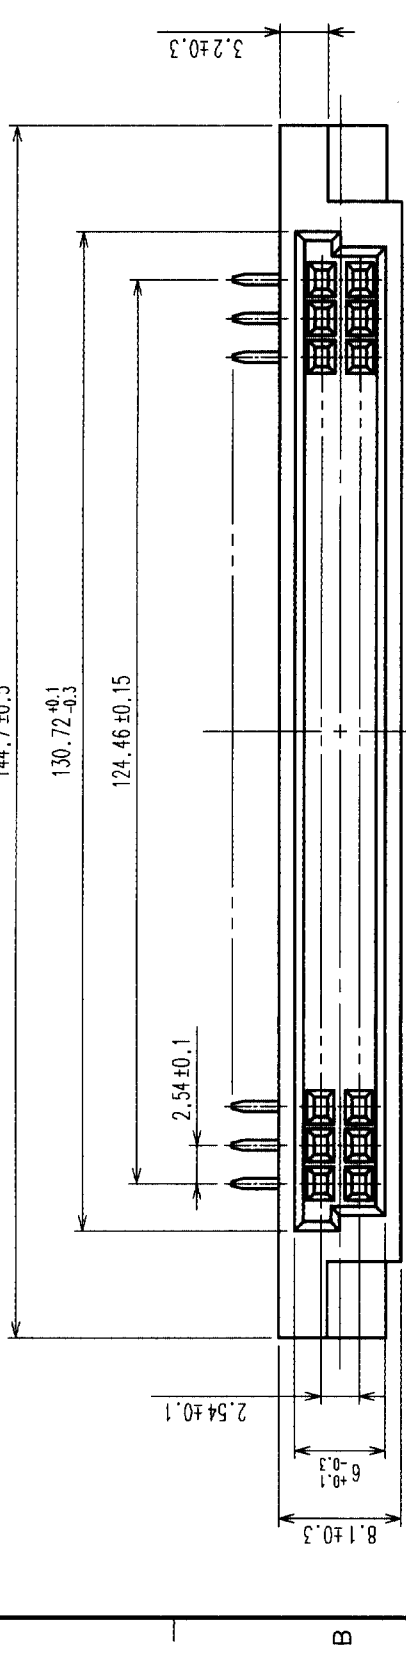


B

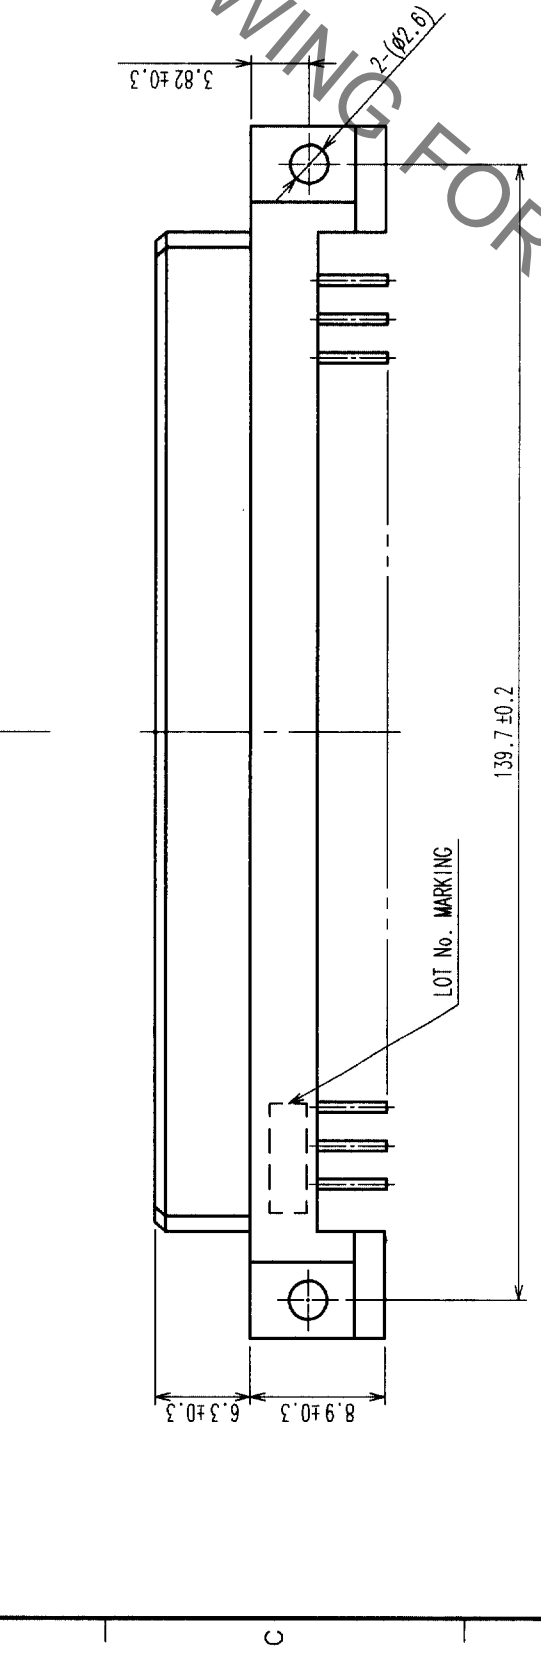

C

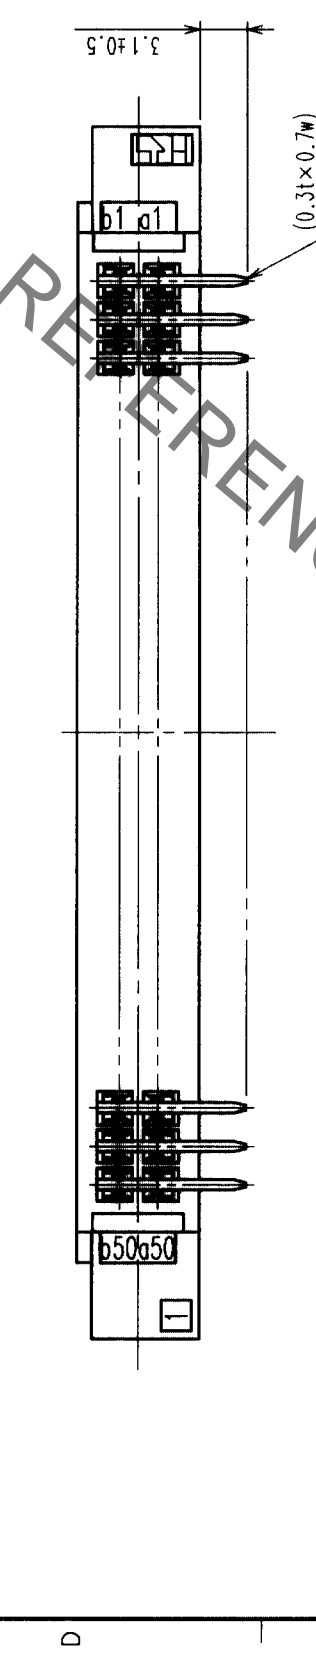

D

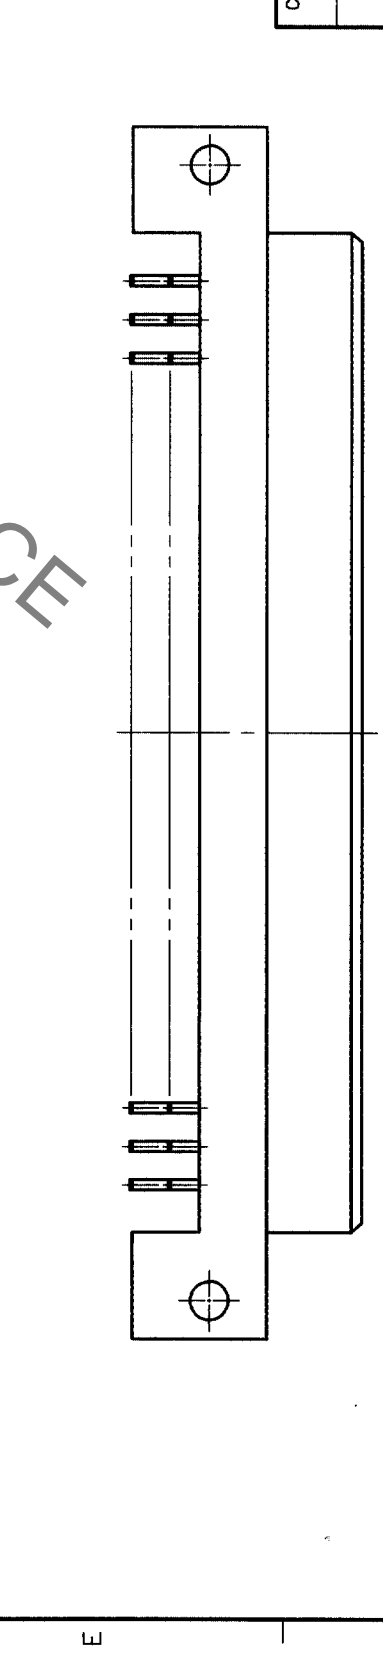

E



F

2,3	COPPER ALLOY	CONTACT AREA : Ni1μm+Au0.1μm DIP AREA : Ni1μm+SnCu2μm
1	PBT	BEIGE, UL94V-0
NO.	MATERIAL	FINISH, REMARKS
DRAWN	DESIGNED	CHECKED
C.Sato	H.Sugimura	K. Ogawa
03.02.07	03.02.07	03.02.10
APPROVED	RELEASED	
		<i>M. Yamaguchi</i>
		03.02.10

CODE NO. (OLD)	CL
DRAWING NO.	EDC3-020275-01
PART NO.	PCN13-100S-2.54DS(71)
SCALE	FREE
UNITS	mm
TO	
PCK	

CODE NO.	CL583-3039-0-71
FORM NO.	229