

**Surface Mount Fast Recovery Rectifiers**
**Surface Mount Fast Recovery Rectifiers**

Reverse Voltage - 50 to 1000 V

Forward Current - 5 A

**FEATURES**

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Fast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

**MECHANICAL DATA**

- Case: SMBF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 57mg / 0.002oz

**PINNING**

PIN	DESCRIPTION
1	Cathode
2	Anode


 Top View  
 Marking Code: R5AB~R5MB  
 Simplified outline SMBF symbol

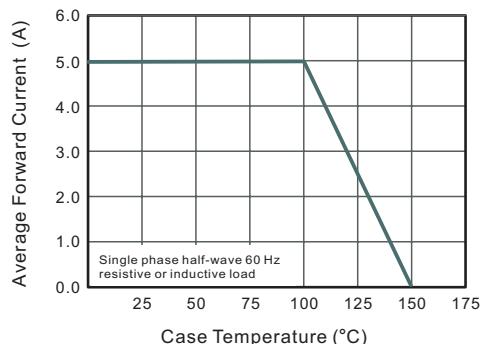
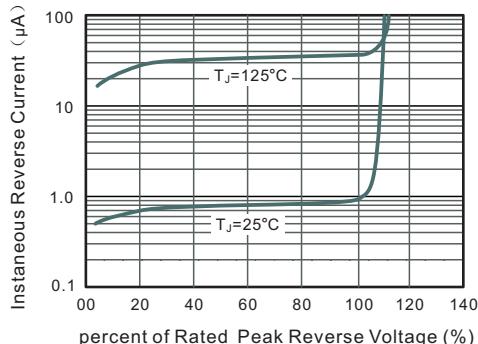
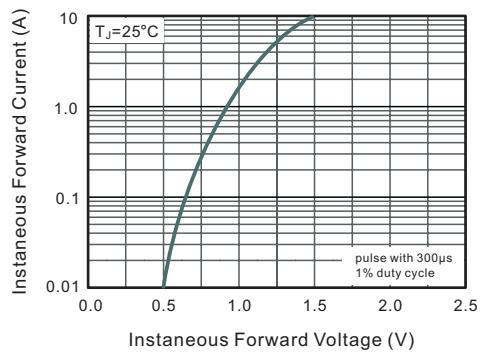
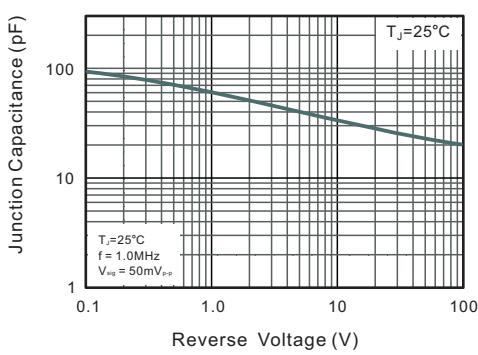
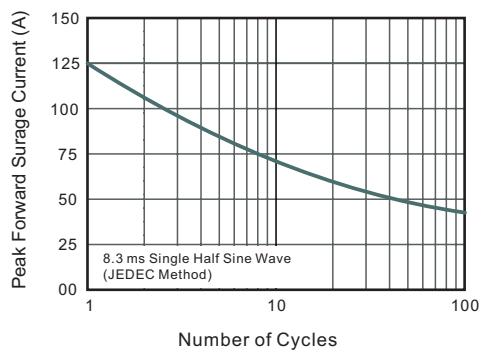
**Absolute Maximum Ratings and Characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

Parameter	Symbols	RS5ABF	RS5BBF	RS5DBF	RS5GBF	RS5JBF	RS5KBF	RS5MBF	Units
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at T <sub>c</sub> = 100 °C	I <sub>F(AV)</sub>					5			A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I <sub>FSM</sub>					125			A
Maximum Forward Voltage at 5 A	V <sub>F</sub>				1.3				V
Maximum DC Reverse Current T <sub>a</sub> = 25 °C at Rated DC Blocking Voltage T <sub>a</sub> = 125 °C	I <sub>R</sub>				10	150			µA
Typical Junction Capacitance at V <sub>R</sub> =4V, f=1MHz	C <sub>j</sub>				45				pF
Maximum Reverse Recovery Time <sup>(1)</sup>	t <sub>rr</sub>			150		250	500		ns
Typical Thermal Resistance <sup>(2)</sup>	R <sub>θJA</sub> R <sub>θJC</sub>				40	12			°C/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>stg</sub>				-55 ~ +150				°C

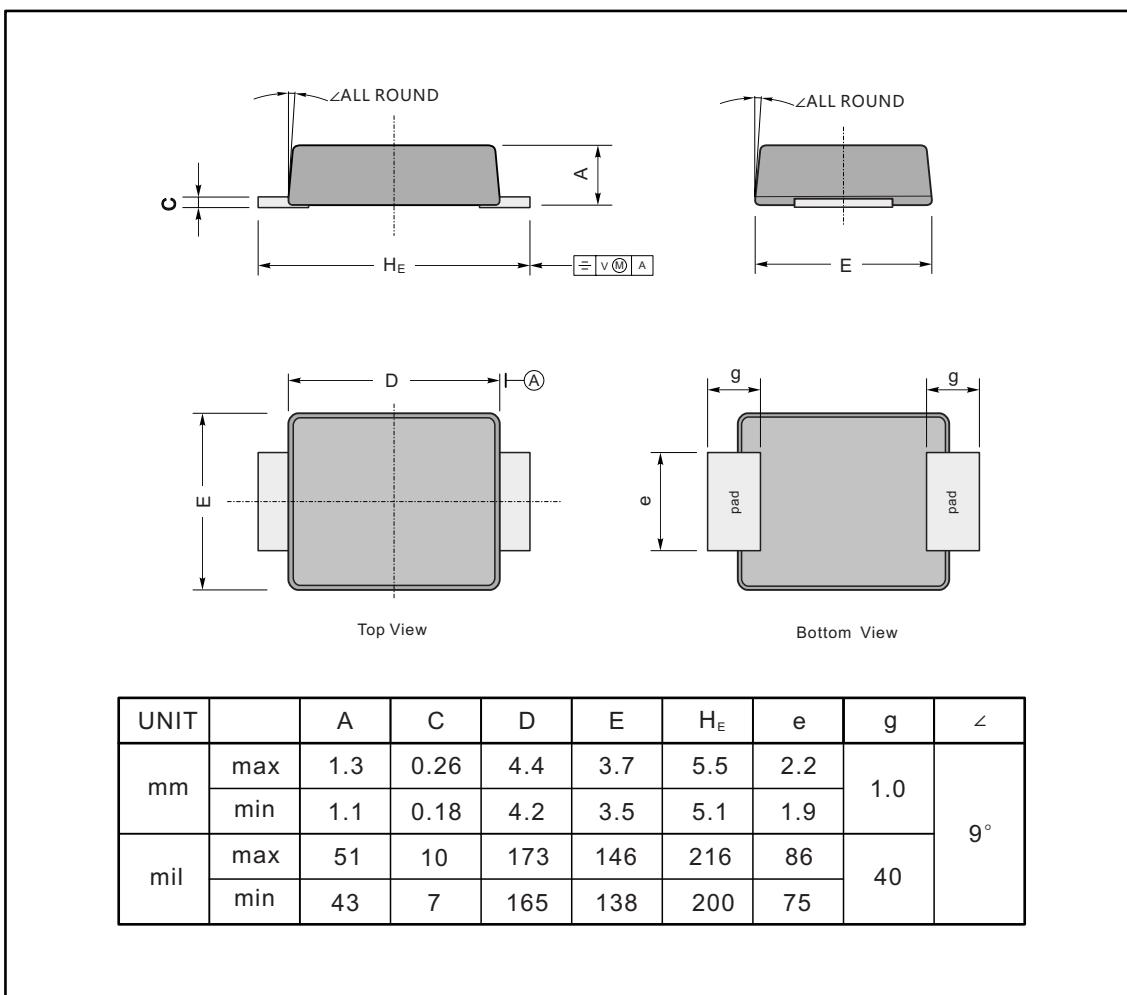
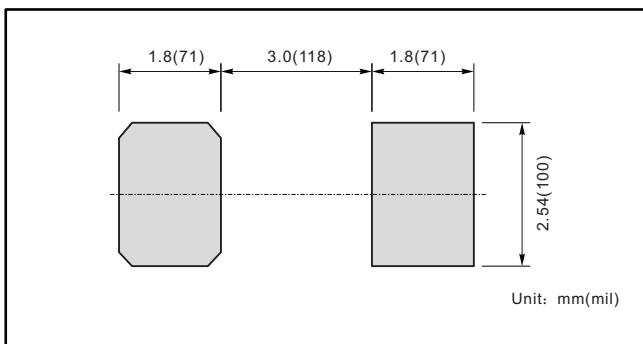
 (1) Measured with I<sub>F</sub> = 0.5 A, I<sub>R</sub> = 1 A, I<sub>rr</sub> = 0.25 A.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

**Fig.1 Maximum Average Forward Current Rating**

**Fig.2 Typical Reverse Characteristics**

**Fig.3 Typical Instantaneous Forward Characteristics**

**Fig.4 Typical Junction Capacitance**

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**


**PACKAGE OUTLINE**

Plastic surface mounted package; 2 leads

**SMBF**

**The recommended mounting pad size**

**Marking**

Type number	Marking code
RS5ABF	R5AB
RS5BBF	R5BB
RS5DBF	R5DB
RS5GBF	R5GB
RS5JBF	R5JB
RS5KBF	R5KB
RS5MBF	R5MB