

EU02D THRU EU02J

Glass Passivated Junction Ultra Fast Recovery Plastic Rectifiers

VOLTAGE: 200 TO 600V

CURRENT: 1.0A




FEATURE

- Low power loss
- High surge capability
- Glass passivated chip junction
- Ultra-fast recovery time for high efficiency
- High temperature soldering guaranteed
- 250°C/10sec/0.375" lead length at 5 lbs tension

MECHANICAL DATA

- Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C
- Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
- Polarity: color band denotes cathode
- Mounting position: any

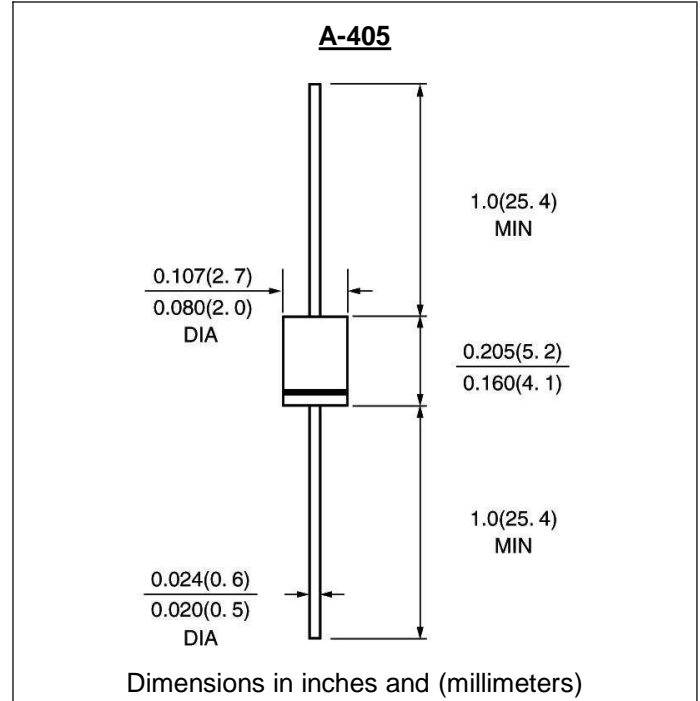

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	EU02D	EU02G	EU02J	units
Maximum Recurrent Peak Reverse Voltage	Vrrm	200	400	600	V
Maximum RMS Voltage	Vrms	140	280	420	V
Maximum DC blocking Voltage	Vdc	200	400	600	V
Maximum Average Forward Rectified Current 3/8"lead length at Ta =55°C	If(av)	1.0			A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	Ifsm	30			A
Maximum Forward Voltage at rated Forward Current and 25°C	Vf	1.4 (IF=1.0A)			V
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =125°C	Ir	10 50			μA μA
Maximum Reverse Recovery Time (Note 1)	Trr	100			nS
Typical Junction Capacitance (Note 2)	Cj	17		15	pF
Typical Thermal Resistance (Note 3)	R(ja)	50		60	°C/W
Storage and Operating Temperature Range	Tstg, Tj	-55 to +150			°C

Note:

- Reverse Recovery Condition If =0.5A, Ir =1.0A, Irr =0.25A
- Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
- Thermal Resistance from Junction to Ambient at 3/8"lead length, P.C. Board Mounted

RATINGS AND CHARACTERISTIC CURVES EU02D THRU EU02J

1

FIG. 1 - MAXIMUM FORWARD CURRENT DERATING CURVE

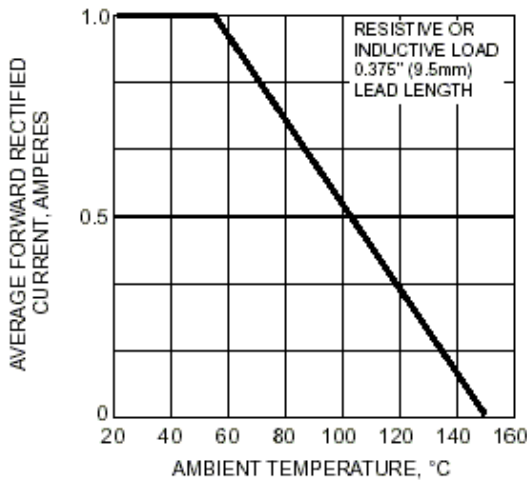


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

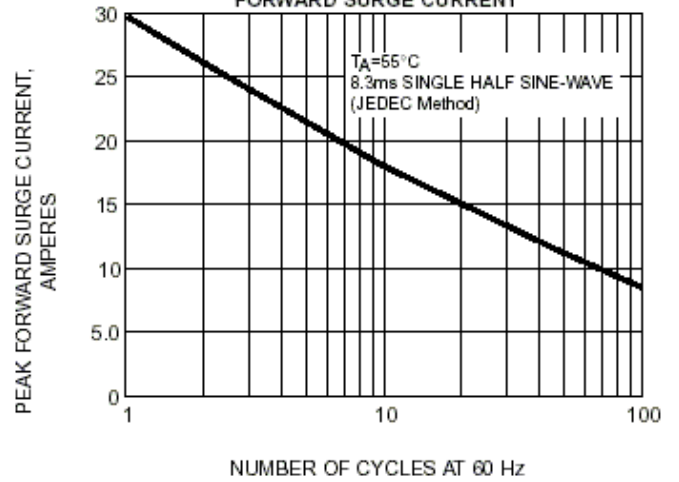


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

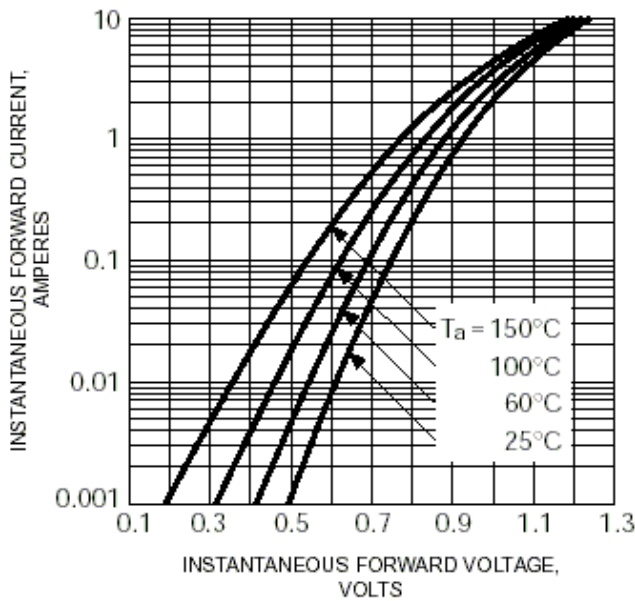


FIG. 4 - TYPICAL JUNCTION CAPACITANCE

