



SF21G THRU SF28G


2.0 AMPS. Glass Passivated Super Fast Rectifiers

Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data

- Case: Molded plastic DO-15
- Terminals: Plated leads solderable per MIL-STD-202, Method 208 guaranteed
- Polarity: Color band dented cathode end
- Mounting Position: Any
- Making: Type Number
- Lead Free: For RoHS/Lead Free Version

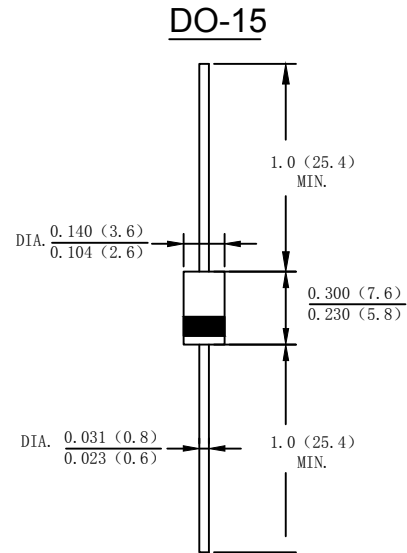

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load

For capacitive load derate current by 20%

Type Number	SYMBOL	SF21G	SF22G	SF23G	SF24G	SF25G	SF26G	SF28G	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RM}	50	100	150	200	300	400	600	V
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	600	V
Average Rectified Output Current (Note 1) @ $T_L=100^\circ C$	$I_{F(AV)}$	2.0							A
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50							A
I^2t Rating for Fusing ($t < 8.3ms$)	I^2t	10.375							A^2s
Forward Voltage @ $I_F=2.0A$	V_{FM}	0.95			1.25		1.7		V
Peak Reverse Current @ $T_A=25^\circ C$	I_R	5.0							uA
At Rated DC Blocking Voltage @ $T_A=125^\circ C$		100							
Maximum Reverse Recovery Time	T_{RR}	35							nS
Typical Junction Capacitance	C_j	40			30				pF
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	25							$^\circ C/W$
Operating Temperature Range	T_j	-55 to + 150							$^\circ C$
Storage Temperature Range	T_{STG}	-55 to + 150							$^\circ C$

Note: 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case

2. Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $IRR=0.25A$

3. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C





SF21G THRU SF28G

2.0 AMPS. Glass Passivated Super Fast Rectifiers

FIG. 1 – FORWARD CURRENT DERATING CURVE

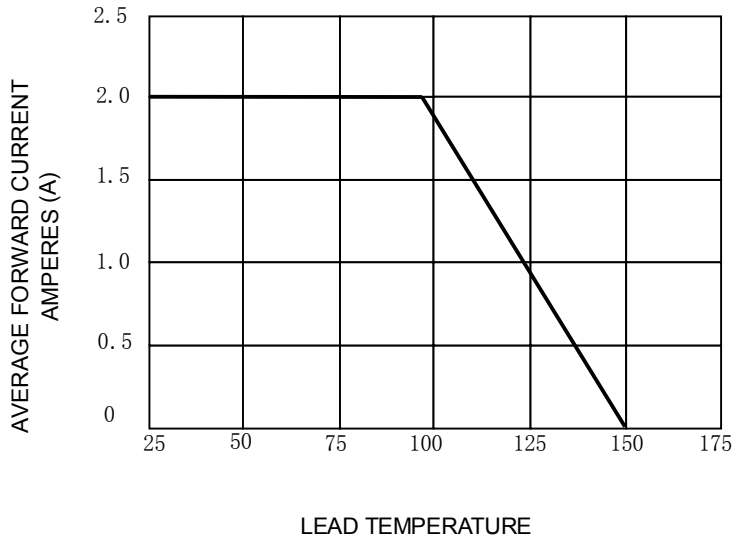


FIG.2-TYPICAL FORWARD CHARACTERISTICS

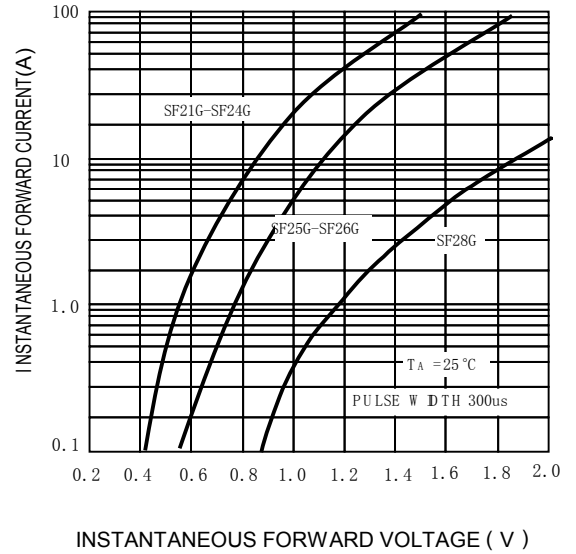


FIG. 3 – MAXIMUM NON-REPETITIVE SURGE CURRENT

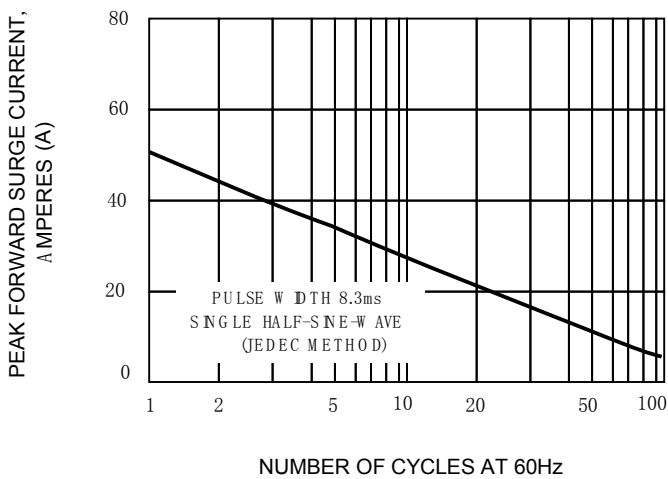


FIG.4 – TYPICAL JUNCTION CAPACITANCE

