


Reverse Voltage 20 to 100V Forward Current 3.0A

Feature & Dimensions

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Low power loss, high efficiency
- * For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- * Guarding for over voltage protection
- * High temperature soldering guaranteed: 260°C/10 seconds at terminals

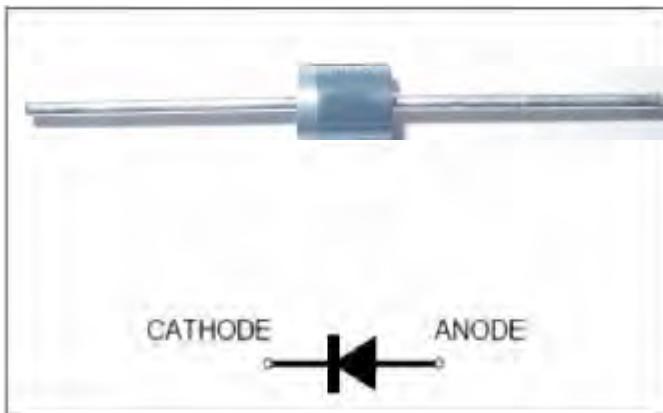

Mechanical Data

Case: JEDEC DO-201AD, molded plastic over glass DIE

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.038oz., 1.03 g

Handling precaution: None

We declare that the material of product compliance with ROHS requirements

1. Maximum & Thermal Characteristics Ratings

at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SB320	SB330	SB340	SB350	SB360	SB380	SB390	SB3100	Unit
device marking code		SB320	SB330	SB340	SB350	SB360	SB380	SB390	SB3100	
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	90	100	V
Maximum RSM voltage	V _{RSM}	14	21	28	35	42	56	63	70	V
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	90	100	V
Maximum average forward rectified current 0.375" (9.5mm) lead length (See fig. 1)	I _{F(AV)}	3.0								A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	80								A
Typical thermal resistance (Note 1)	R _{θJA}	50								°C/W
Operating temperature range	T _J	−55 to +150								°C
storage temperature range	T _{STG}	−55 to +150								°C

Electrical Characteristics Ratings

at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SB320	SB330	SB340	SB350	SB360	SB380	SB390	SB3100	Unit				
Maximum instantaneous forward voltage at 3.0A	V _F	0.50		0.70		0.85				V				
Maximum DC reverse current TA = 25°C at rated DC blocking voltage TA = 100°C	I _R	0.5 30								mA				
Typical junction capacitance at 4.0V, 1MHz	C _J	160								PF				

NOTES:

- Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

2. Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

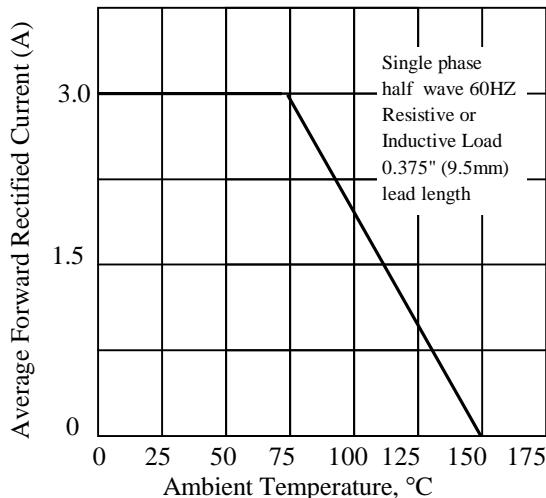


Fig 3. - Typical Instantaneous Forward Characteristics

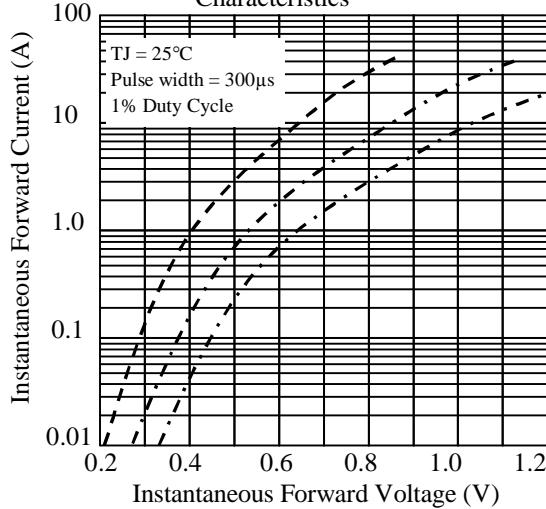


Fig 5. - typical transient thermal impedance

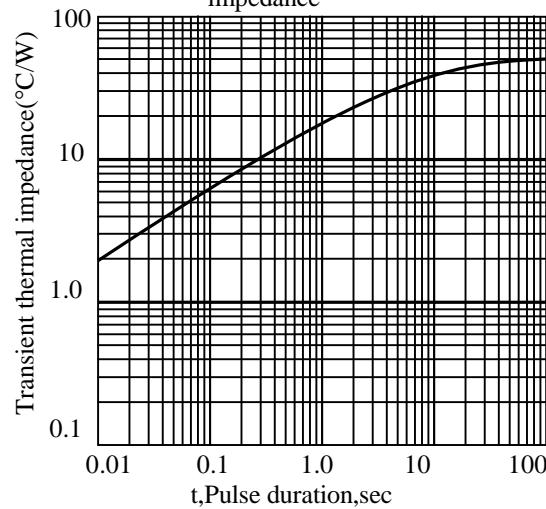


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

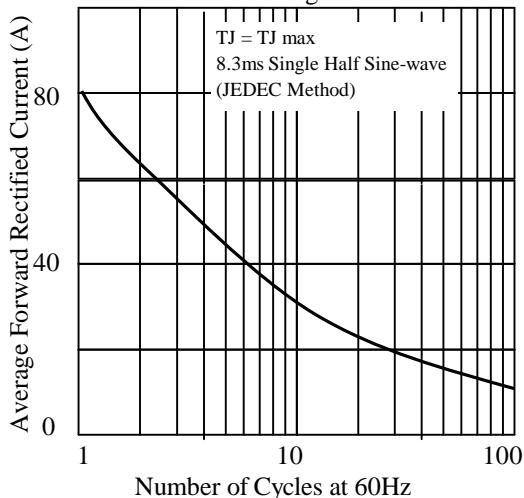


Fig 4. - Typical Reverse Characteristics


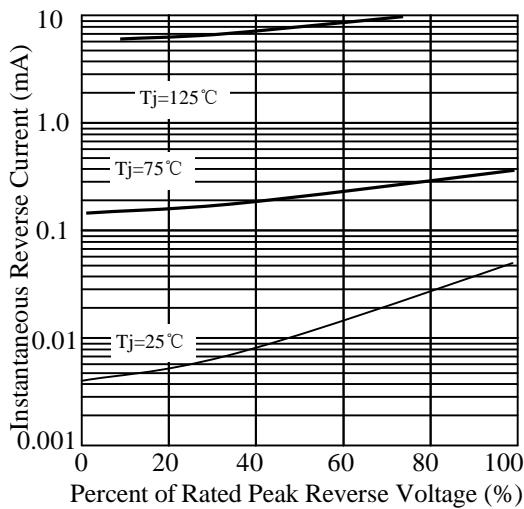


Fig 6. - Typical Junction Capacitance

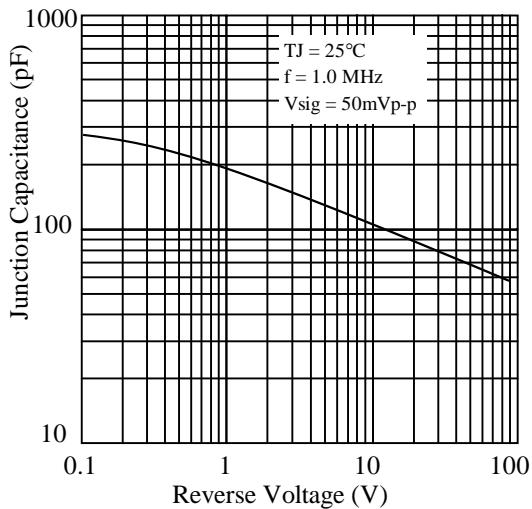

3. dimension:

Package outline

Dimensions

	inches		mm		Note: DO-201AD molded plastic case The marking band indicates the cathode
	Min.	Max.	Min.	Max.	
L	0.335	0.375	8.5	9.5	
L1	1.0	-	25.4	-	
ΦD	0.197	0.220	5.0	5.6	
Φd	0.048	0.052	1.2	1.3	