


**Major Ratings and Characteristics**

| Characteristics                                    | 220CMQ030  | Units            |
|--|------------|------------------|
| $I_{F(AV)}$ Rectangular waveform                   | 220        | A                |
| $V_{RRM}$  | 30         | V                |
| $I_{FSM}$ @tp = 5 $\mu$ s sine                     | 22,500     | A                |
| $V_F$ @110Apk, $T_J = 125^\circ\text{C}$ (per leg) | 0.40       | V                |
| $T_J$ range  | -55 to 150 | $^\circ\text{C}$ |

**Description/Features**

The 220CMQ030 high current Schottky rectifier module has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150  $^\circ\text{C}$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, welding and reverse battery protection.

- 150  $^\circ\text{C}$   $T_J$  operation
- Center tap module - Isolated Base
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

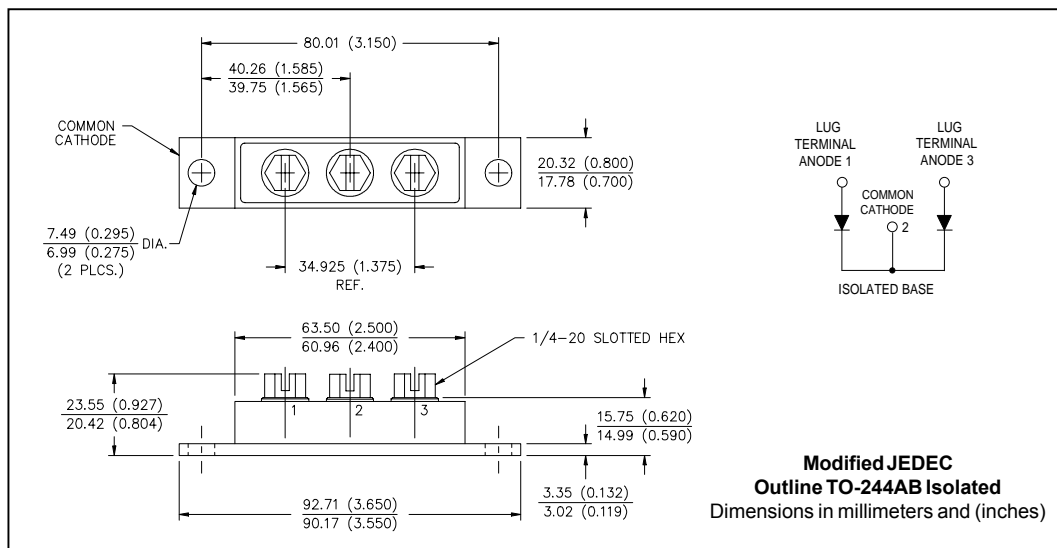

# 220CMQ030

Bulletin PD-2.555 rev. B 08/01

International  
**IRF** Rectifier

## Voltage Ratings

|   |           |
|---|-----------|
| Part number                                     | 220CMQ030 |
| $V_R$ Max. DC Reverse Voltage (V)               | 30        |
| $V_{RWM}$ Max. Working Peak Reverse Voltage (V) |           |

## Absolute Maximum Ratings

| Parameters  | 220CMQ          | Units | Conditions   |
|---|-----------------|-------|--|
| $I_{F(AV)}$ Max. Average Forward Current (Per Leg) * See Fig. 5 (Per Device)      | 110<br>220      | A     | 50% duty cycle @ $T_C = 100^\circ\text{C}$ , rectangular waveform  |
| $I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7 | 22,500<br>2,400 | A     | 5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse<br>10ms Sine or 6ms Rect. pulse<br>Following any rated load condition and with rated $V_{RWM}$ applied |
| $E_{AS}$ Non-Repetitive Avalanche Energy (Per Leg)                                | 99              | mJ    | $T_J = 25^\circ\text{C}$ , $I_{AS} = 22$ Amps, $L = 0.41$ mH   |
| $I_{AR}$ Repetitive Avalanche Current (Per Leg)                                   | 22              | A     | Current decaying linearly to zero in 1 $\mu\text{sec}$<br>Frequency limited by $T_J$ , max. $V_A = 1.5 \times V_R$ typical                                 |

## Electrical Specifications

| Parameters   | 220CMQ | Units            | Conditions  |
|--|--------|------------------|---|
| $V_{FM}$ Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)    | 0.48   | V                | @ 110A<br>$T_J = 25^\circ\text{C}$                                      |
|  | 0.57   | V                | @ 220A  |
|  | 0.40   | V                | @ 110A<br>$T_J = 125^\circ\text{C}$                                     |
|  | 0.52   | V                | @ 220A  |
| $I_{RM}$ Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1) | 10     | mA               | $T_J = 25^\circ\text{C}$  |
|  | 560    | mA               | $T_J = 125^\circ\text{C}$<br>$V_R = \text{rated } V_R$                  |
| $V_{F(TO)}$ Threshold Voltage                                    | 0.23   | V                | $T_J = T_J \text{ max.}$  |
| $r_t$ Forward Slope Resistance                                   | 1.16   | m $\Omega$       |   |
| $C_T$ Max. Junction Capacitance (Per Leg)                        | 7,400  | pF               | $V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$ |
| $L_S$ Typical Series Inductance (Per Leg)                        | 7.0    | nH               | From top of terminal hole to mounting plane                             |
| dv/dt Max. Voltage Rate of Change                                | 10000  | V/ $\mu\text{s}$ | (Rated $V_R$ )  |
| $V_{RMS}$ Insulation Voltage                                     | 1000   | V                |   |

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

## Thermal-Mechanical Specifications

| Parameters  | 220CMQ                      | Units              | Conditions                           |          |
|---|-----------------------------|--------------------|--------------------------------------|----------|
| $T_J$ Max. Junction Temperature Range                             | -55 to 150                  | $^\circ\text{C}$   |                                      |          |
| $T_{stg}$ Max. Storage Temperature Range                          | -55 to 150                  | $^\circ\text{C}$   |                                      |          |
| $R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Leg)     | 0.70                        | $^\circ\text{C/W}$ | DC operation * See Fig. 4            |          |
| $R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Package) | 0.35                        | $^\circ\text{C/W}$ | DC operation                         |          |
| $R_{thCS}$ Typical Thermal Resistance, Case to Heatsink           | 0.10                        | $^\circ\text{C/W}$ | Mounting surface, smooth and greased |          |
| wt Approximate Weight   | 79(2.80)                    | g(oz.)             |                                      |          |
| T Mounting Torque   | Min.                        | 24(20)             | Kg-cm<br>(lbf-in)                    |          |
|   | Max.                        | 35(30)             |                                      |          |
|   | Mounting Torque Center Hole | Typ.               |                                      | 13.5(12) |
|   | Terminal Torque             | Min.               |                                      | 35(30)   |
|   |                             | Max.               |                                      | 46(40)   |
| Case Style  | TO-244AB Isolated           |                    | Modified JEDEC                       |          |

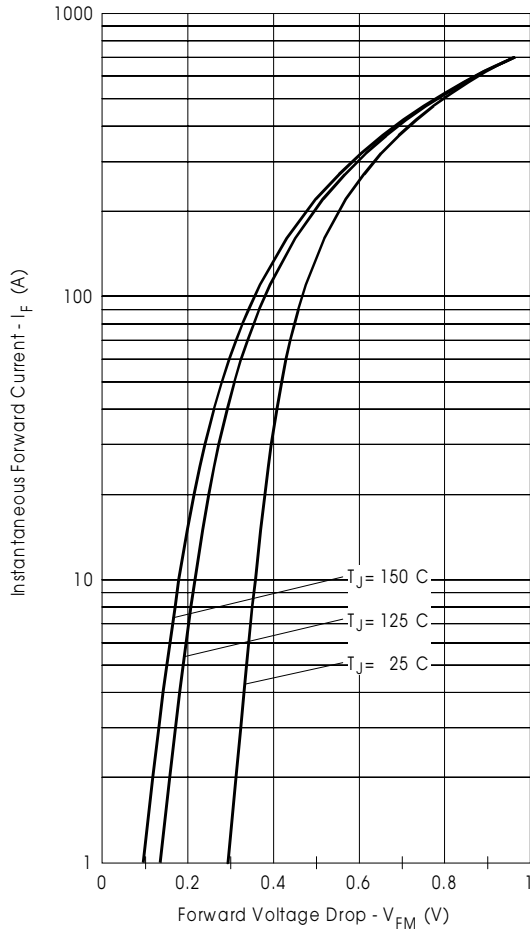


Fig. 1 - Max. Forward Voltage Drop Characteristics (PerLeg)

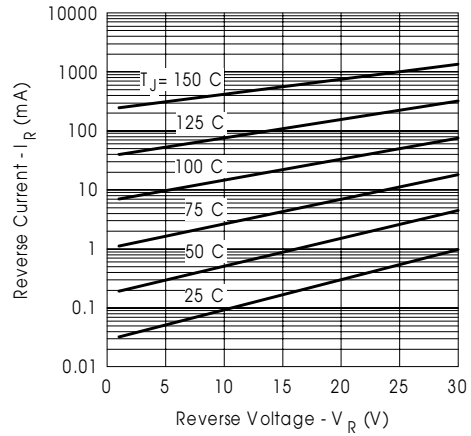


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (PerLeg)

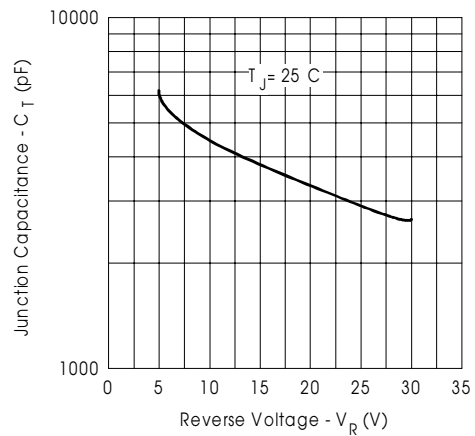


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (PerLeg)

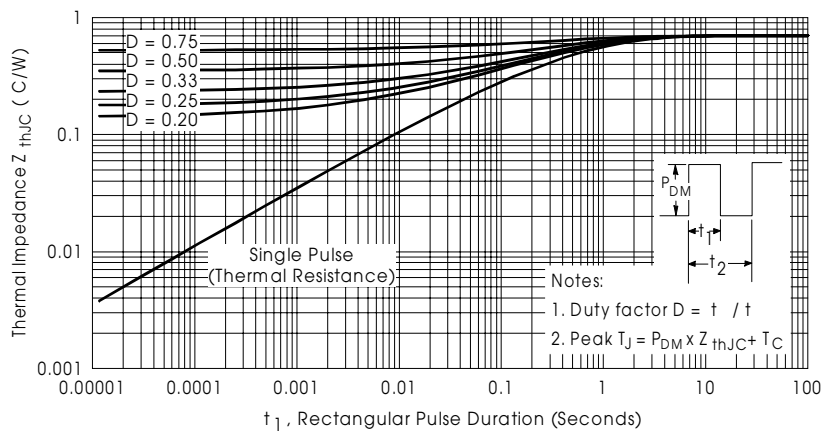


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (PerLeg)

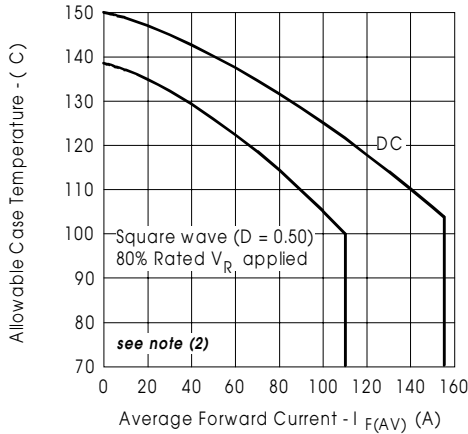


Fig. 5- Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

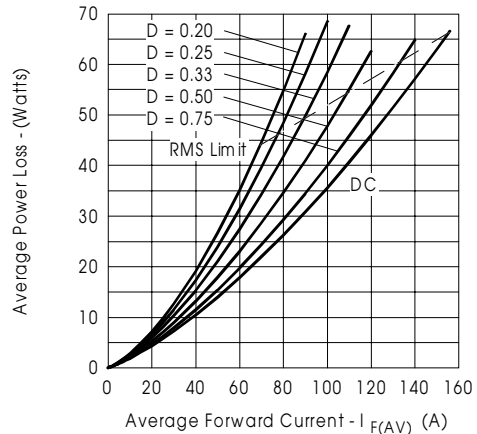


Fig. 6- Forward Power Loss Characteristics (Per Leg)

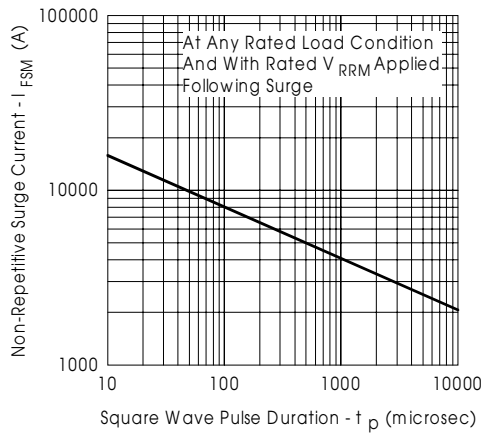


Fig. 7- Max. Non-Repetitive Surge Current (Per Leg)

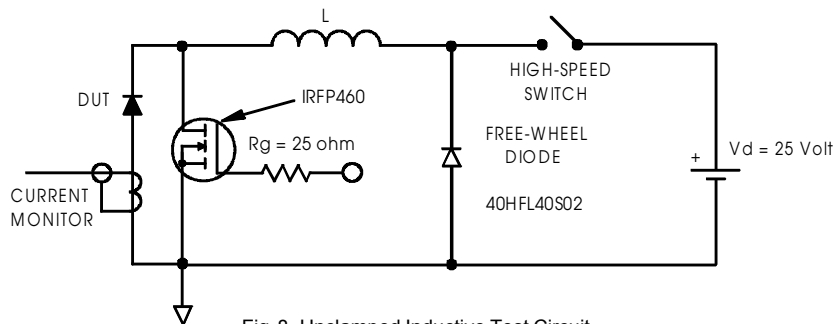


Fig. 8- Unclamped Inductive Test Circuit

- (2) Formula used:  $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;  
 $P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);  
 $P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D); I_R @ V_{R1} = 80\% \text{ rated } V_R$

Ordering Information Table

| Device Code |   |                      |   |     |
|-------------|---|----------------------|---|-----|
| 220         | C | M                    | Q | 030 |
| ①           | ② | ③                    | ④ | ⑤   |
| <b>1</b>    | - | Current Rating: 220A |   |     |
| <b>2</b>    | - | Common Cathode       |   |     |
| <b>3</b>    | - | Module               |   |     |
| <b>4</b>    | - | Schottky Q Series    |   |     |
| <b>5</b>    | - | Voltage Rating: 30V  |   |     |

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.