




# SS22BF THRU SS220BF

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts Forward Current - 2.0 Ampere

### SMBF

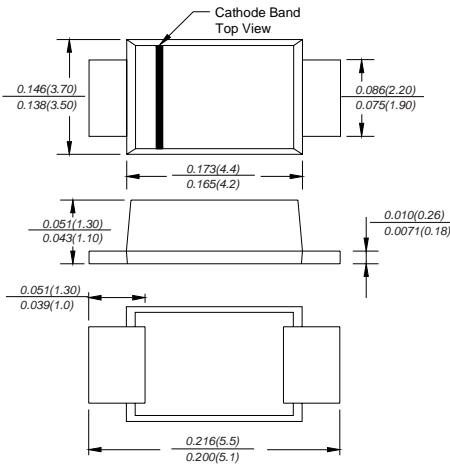

### FEATURES

- ◆ Metal silicon junction, majority carrier conduction
- ◆ For surface mounted applications
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ For use in low voltage, high frequency inverters, free-wheeling, and polarity protection applications

### MECHANICAL DATA

**Case:** JEDEC SMBF molded plastic body  
**Terminals:** leads solderable per MIL-STD-750, Method 2026  
**Mounting Position:** Any  
**Weight:** 57mg/0.002oz

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

TWGMC Catalog Number	SYMBOLS	SS22BF	SS24BF	SS26BF	SS28BF	SS210BF	SS215BF	SS220BF	UNITS
Marking code		S22B	S24B	S26B	S28F	S210B	S215B	S220B	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	40	60	80	100	150	200	VOLTS
Maximum RMS voltage	$V_{RMS}$	14	28	42	56	70	105	140	VOLTS
Maximum DC blocking voltage	$V_{DC}$	20	40	60	80	100	150	200	VOLTS
Maximum average forward rectified current at $T_L$ (see fig.1)	$I_{(AV)}$	2.0							Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50			40			Amps	
Maximum instantaneous forward voltage at 2.0A	$V_F$	0.55	0.70	0.85		0.95		Volts	
Maximum DC reverse current at rated DC blocking voltage	$I_R$	0.5 5.0			0.3 3.0			mA	
Typical junction capacitance (NOTE 1)	$C_J$	250			110			pF	
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	65							°C/W
Operating junction temperature range	$T_J$	-50 to +125							°C
Storage temperature range	$T_{STG}$	-50 to +150							°C


**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
 2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

# RATINGS AND CHARACTERISTIC CURVES SS22BF THRU SS220BF


**Fig.1 Forward Current Derating Curve**

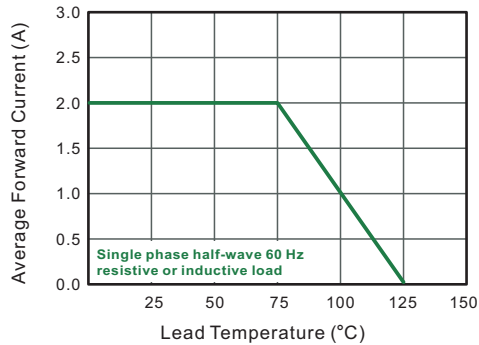


**Fig.2 Typical Reverse Characteristics**

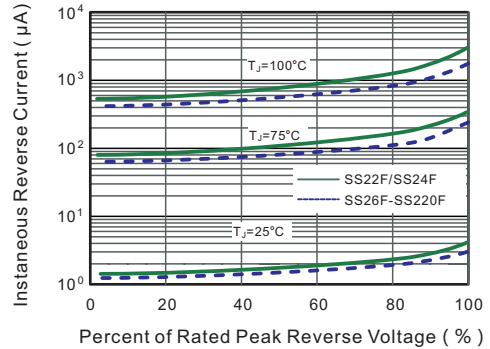


**Fig.3 Typical Forward Characteristic**

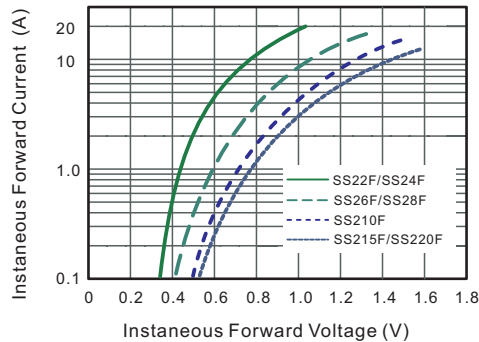

**Fig.4 Typical Junction Capacitance**

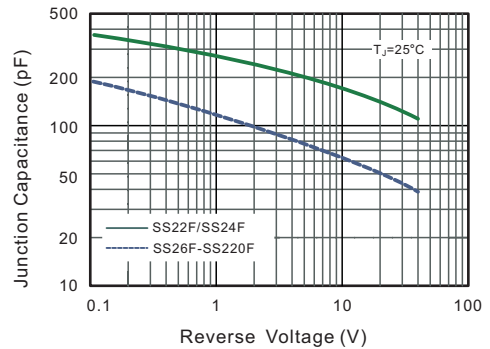

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

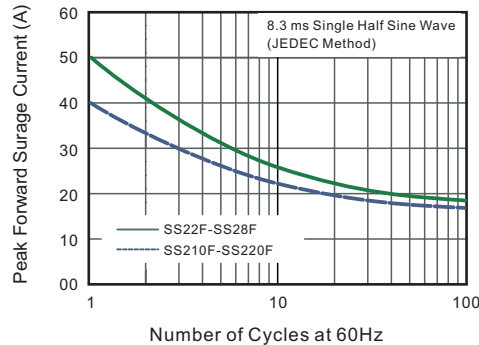

**Fig.6 Typical Transient Thermal Impedance**

