

EBLC03 thru EBLC24C

Ultra LOW CAPACITANCE TVS ARRAY

Description

The EBLCxx and EBLCxxC Series are ultra low capacitance transient voltage suppressor arrays, designed to protect applications such as portable electronics and SMART phones.

This series is available in both unidirectional and bidirectional configurations and is rated at 350 Watts for an 8/20µs waveshape.

The EBLCxx and EBLCxxC Series meets IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT) requirements. At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. This series offers a ultra low capacitance and low leakage current in a miniature SOD-323 package.

Features



- Compatible with IEC 61000-4-2 (ESD): Air - 15kV, Contact - 8kV Exceeds Level 4: Handles 10kV Contact & 25kV Air Discharge
- Compatible with IEC 61000-4-4 (EFT): 40A - 5/50ns
- Compatible with IEC 61000-4-5 (Surge)
- 350 Watts Peak Pulse Power per Line (tp = 8/20µs)
- Replacement for MLV (0805)
- Unidirectional & Bidirectional Configuration
- Protects One Power or I/O Port
- ESD Protection > 25kV
- Low Clamping Voltage
- Available in Multiple Voltages Ranging From 3V to 24V
- Ultra Low Capacitance: 3pF (Typical)
- RoHS compliant package
- REACH Compliant

Order & Packing Information

3,000/Reel




RoHS
COMPLIANT

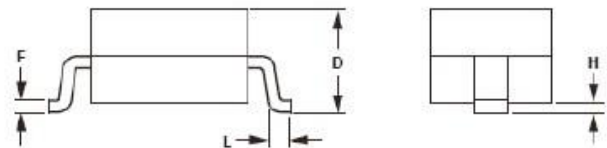

OUTLINE DIMENSIONS				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.60	1.90	0.063	0.075
B	1.15	1.45	0.045	0.057
C	2.39	2.70	0.094	0.106
D	0.80	1.10	0.031	0.043
E	0.25	0.40	0.010	0.016
F	0.10	0.20	0.004	0.008
H	-	0.10	-	0.004
L	0.20	-	0.008	-

NOTES
 1. Controlling dimension: millimeters.
 2. Dimensioning and tolerances per ANSI Y14.5M, 1985.
 3. Dimensions are exclusive of mold flash and metal burrs.

Graphic symbol

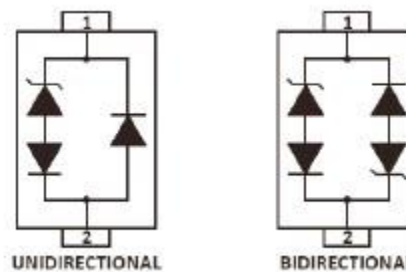

Applications:

- Ethernet 10/100/1000 Base T
- SMART Phones
- Handheld - Wireless Systems
- USB Interface

EBLC03 thru EBLC24C

Ultra LOW CAPACITANCE TVS ARRAY

Mechanical Data

- Molded JEDEC SOD-323 Package
- Approximate Weight: 5 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature: Pure-Tin - Sn, 100: 260-270°C
- 8mm Tape and Reel Per EIA Standard 481
- Flammability Rating UL 94V-0

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum Ratings (Tc=25°C unless otherwise noted)

Symbol	Parameter	EBLC	Unit
Ppk	Peak Pulse Power (tp = 8/20µs)	350	W
TJ	Operating Temperature	-55 to +125	°C
TSTG	Storage Temperature	-55 to +150	°C

Electrical Characteristics Per Line @25°C Unless Otherwise Specified

PART NUMBER (Note 1-2)	DEVICE MARKING	RATED STAND-OFF VOLTAGE V _{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA V _(BR) VOLTS	MINIMUM CLAMPING VOLTAGE (Fig.2) @ 1P=1A V _c VOLTS	MINIMUM LEAKAGE VOLTAGE @ V _{WM} I _D µA	TYPICAL CAPACITANCE @ 0V,1MHz C pFE
EBLC03	3	3.3	4.0	7.0	5	3E
EBLC03C	3C	3.3	4.0	7.0	5	3EE
EBLC05	5	5.0	6.0	9.8	5	3E
EBLC05C	5C	5.0	6.0	9.8	5	3E
EBLC08	8	8.0	8.5	13.4	2	3E
EBLC08C	8C	8.0	8.5	13.4	2	3EE
EBLC12	2	12.0	13.3	19.0	1	3
EBLC12C	2C	12.0	13.3	19.0	1	3E
EBLC15	6	15.0	16.7	24.0	1	3E
EBLC15C	6C	15.0	16.7	24.0	1	3E
EBLC24	4	24.0	26.7	43.0	1	3
EBLC24C	4C	24.0	26.7	43.0	1	3

Notes

- 1.Part unmbers with an additional "c" suffix are bidirectional devices, i.e., EBLC05C.
- 2.Unidirectional Only: Positive potential is applied from pin 1 to2.

EBLC03 thru EBLC24C

Ultra LOW CAPACITANCE TVS ARRAY

Typical Device Characteristics

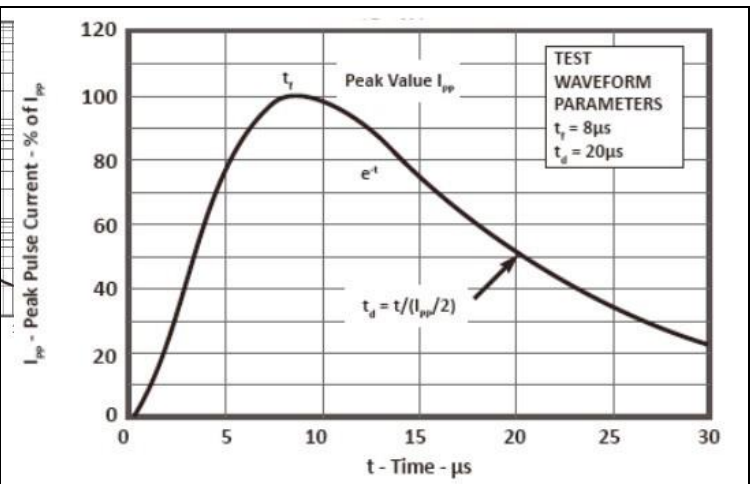
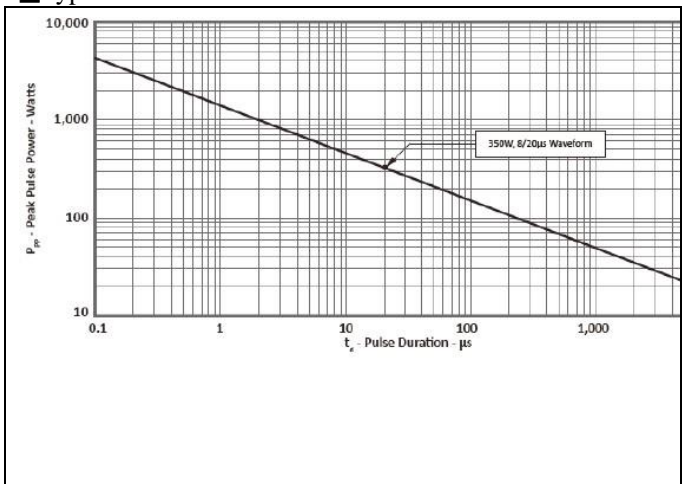


FIG.1-NON-REPETITIVE PEAK PULSE POWER VS. TIME

FIG.2-POWER DERATING CURVE

EBLC03 thru EBLC24C

Ultra LOW CAPACITANCE TVS ARRAY

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE

WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.