

500 mW DO-35 Hermetically Sealed Glass Zener Voltage Regulators



AXIAL LEAD
DO35

Absolute Maximum Ratings T_A = 25°C unless otherwise noted

| Parameter | Value | Units |
|--------------------------------|-------------|-------|
| Power Dissipation | 500 | mW |
| Storage Temperature Range | -65 to +175 | °C |
| Operating Junction Temperature | +175 | °C |

These ratings are limiting values above which the serviceability of the diode may be impaired.


DEVICE MARKING DIAGRAM



L : Logo
 Device Code : TC1N52xxT
 VZ Tolerance (T) : B = ±5%
 C = ±2%

Specification Features:

- § Zener Voltage Range 2.4 to 56 Volts
- § DO-35 Package (JEDEC)
- § Through-Hole Device Type Mounting
- § Hermetically Sealed Glass
- § Compression Bonded Construction
- § All External Surfaces Are Corrosion Resistant And Leads Are Readily Solderable
- § RoHS Compliant
- § Solder Hot Dip Tin (Sn) Lead Finish
- § Cathode Indicated By Polarity Band



ELECTRICAL SYMBOL

Electrical Characteristics T_A = 25°C unless otherwise noted

| Device Type | V _Z @ I _{ZT} (Volts) Nominal | I _{ZT} (mA) | Z _{ZT} @ I _{ZT} (Ω) Max | Z _{ZK} @ I _{ZK} = 0.25mA (Ω) Max | I _R @ V _R (μA) Max | V _R (Volts) |
|-------------|--|-------------------------|---|--|--|---------------------------|
| TC1N5221B | 2.4 | 20 | 30 | 1200 | 100 | 1 |
| TC1N5222B | 2.5 | 20 | 30 | 1250 | 100 | 1 |
| TC1N5223B | 2.7 | 20 | 30 | 1300 | 75 | 1 |
| TC1N5224B | 2.8 | 20 | 30 | 1400 | 75 | 1 |
| TC1N5225B | 3 | 20 | 29 | 1600 | 50 | 1 |
| TC1N5226B | 3.3 | 20 | 28 | 1600 | 25 | 1 |
| TC1N5227B | 3.6 | 20 | 24 | 1700 | 15 | 1 |
| TC1N5228B | 3.9 | 20 | 23 | 1900 | 10 | 1 |
| TC1N5229B | 4.3 | 20 | 22 | 2000 | 5 | 1 |
| TC1N5230B | 4.7 | 20 | 19 | 1900 | 5 | 2 |
| TC1N5231B | 5.1 | 20 | 17 | 1600 | 5 | 2 |
| TC1N5232B | 5.6 | 20 | 11 | 1600 | 5 | 3 |
| TC1N5233B | 6 | 20 | 7 | 1600 | 5 | 3.5 |
| TC1N5234B | 6.2 | 20 | 7 | 1000 | 5 | 4 |
| TC1N5235B | 6.8 | 20 | 5 | 750 | 3 | 5 |
| TC1N5236B | 7.5 | 20 | 6 | 500 | 3 | 6 |
| TC1N5237B | 8.2 | 20 | 8 | 500 | 3 | 6.5 |
| TC1N5238B | 8.7 | 20 | 8 | 600 | 3 | 6.5 |
| TC1N5239B | 9.1 | 20 | 10 | 600 | 3 | 7 |
| TC1N5240B | 10 | 20 | 17 | 600 | 3 | 8 |

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

| Device Type | $V_Z @ I_{ZT}$ (Volts) Nominal | I_{ZT} (mA) | $Z_{ZT} @ I_{ZT}$ (Ω) Max | $Z_{ZK} @ I_{ZK} = 0.25\text{mA}$ (Ω) Max | $I_R @ V_R$ (μA) Max | V_R (Volts) |
|-------------|--------------------------------------|------------------|--|--|---|------------------|
| TC1N5241B | 11 | 20 | 22 | 600 | 2 | 8.4 |
| TC1N5242B | 12 | 20 | 30 | 600 | 1 | 9.1 |
| TC1N5243B | 13 | 9.5 | 13 | 600 | 0.5 | 9.9 |
| TC1N5244B | 14 | 9 | 15 | 600 | 0.1 | 10 |
| TC1N5245B | 15 | 8.5 | 16 | 600 | 0.1 | 11 |
| TC1N5246B | 16 | 7.8 | 17 | 600 | 0.1 | 12 |
| TC1N5247B | 17 | 7.4 | 19 | 600 | 0.1 | 13 |
| TC1N5248B | 18 | 7 | 21 | 600 | 0.1 | 14 |
| TC1N5249B | 19 | 6.6 | 23 | 600 | 0.1 | 14 |
| TC1N5250B | 20 | 6.2 | 25 | 600 | 0.1 | 15 |
| TC1N5251B | 22 | 5.6 | 29 | 600 | 0.1 | 17 |
| TC1N5252B | 24 | 5.2 | 33 | 600 | 0.1 | 18 |
| TC1N5253B | 25 | 5 | 35 | 600 | 0.1 | 19 |
| TC1N5254B | 27 | 4.6 | 41 | 600 | 0.1 | 21 |
| TC1N5255B | 28 | 4.5 | 44 | 600 | 0.1 | 21 |
| TC1N5256B | 30 | 4.2 | 49 | 600 | 0.1 | 23 |
| TC1N5257B | 33 | 3.8 | 58 | 700 | 0.1 | 25 |
| TC1N5258B | 36 | 3.4 | 70 | 700 | 0.1 | 27 |
| TC1N5259B | 39 | 3.2 | 80 | 800 | 0.1 | 30 |
| TC1N5260B | 43 | 3 | 93 | 900 | 0.1 | 33 |
| TC1N5261B | 47 | 2.7 | 105 | 1000 | 0.1 | 36 |
| TC1N5262B | 51 | 2.5 | 125 | 1100 | 0.1 | 39 |
| TC1N5263B | 56 | 2.2 | 150 | 1300 | 0.1 | 43 |

V_F Forward Voltage = 1.1 V Maximum @ $I_F = 200$ mA for all types

Notes:

1. TOLERANCE AND VOLTAGE DESIGNATION

The type numbers listed have zener voltage as shown and have a standard tolerance on the nominal zener voltage of $\pm 5\%$. Device of $\pm 2\%$ is indicated by a "C" instead of a "B"

2. SPECIALS AVAILABLE INCLUDE

Nominal zener voltages between the voltages shown and tighter voltage, for detailed information on price, availability and delivery, contact you nearest Tak Cheong representative.


3. ZENER VOLTAGE (V_Z) MEASUREMENT

The zener voltage (V_Z) is tested under pulse condition.

4. ZENER IMPEDANCE (Z_Z) DERIVATION

Zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an RMS value equal to 10% of the dc zener current (I_{ZT}) is superimposed to I_{ZT} .

Package Outline
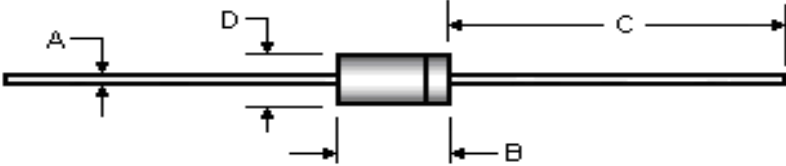
| Package | Case Outline | | | | |
|----------|--|--------------------|-------|---------------|-------|
| DO-35 |  | | | | |
| | DO-35 | | | | |
| | DIM | Millimeters | | Inches | |
| | | Min | Max | Min | Max |
| | A | 0.46 | 0.55 | 0.018 | 0.022 |
| | B | --- | 5.08 | --- | 0.200 |
| C | 25.40 | 38.10 | 1.000 | 1.500 | |
| D | 1.53 | 2.28 | 0.060 | 0.090 | |

Notes:

1. All dimensions are within JEDEC standard.
2. DO35 polarity denoted by cathode band.