


Aug.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

【 Assemble tool 】 For outer conductor crimping : HT303/UM.MSS-T-1(1.5 hole)

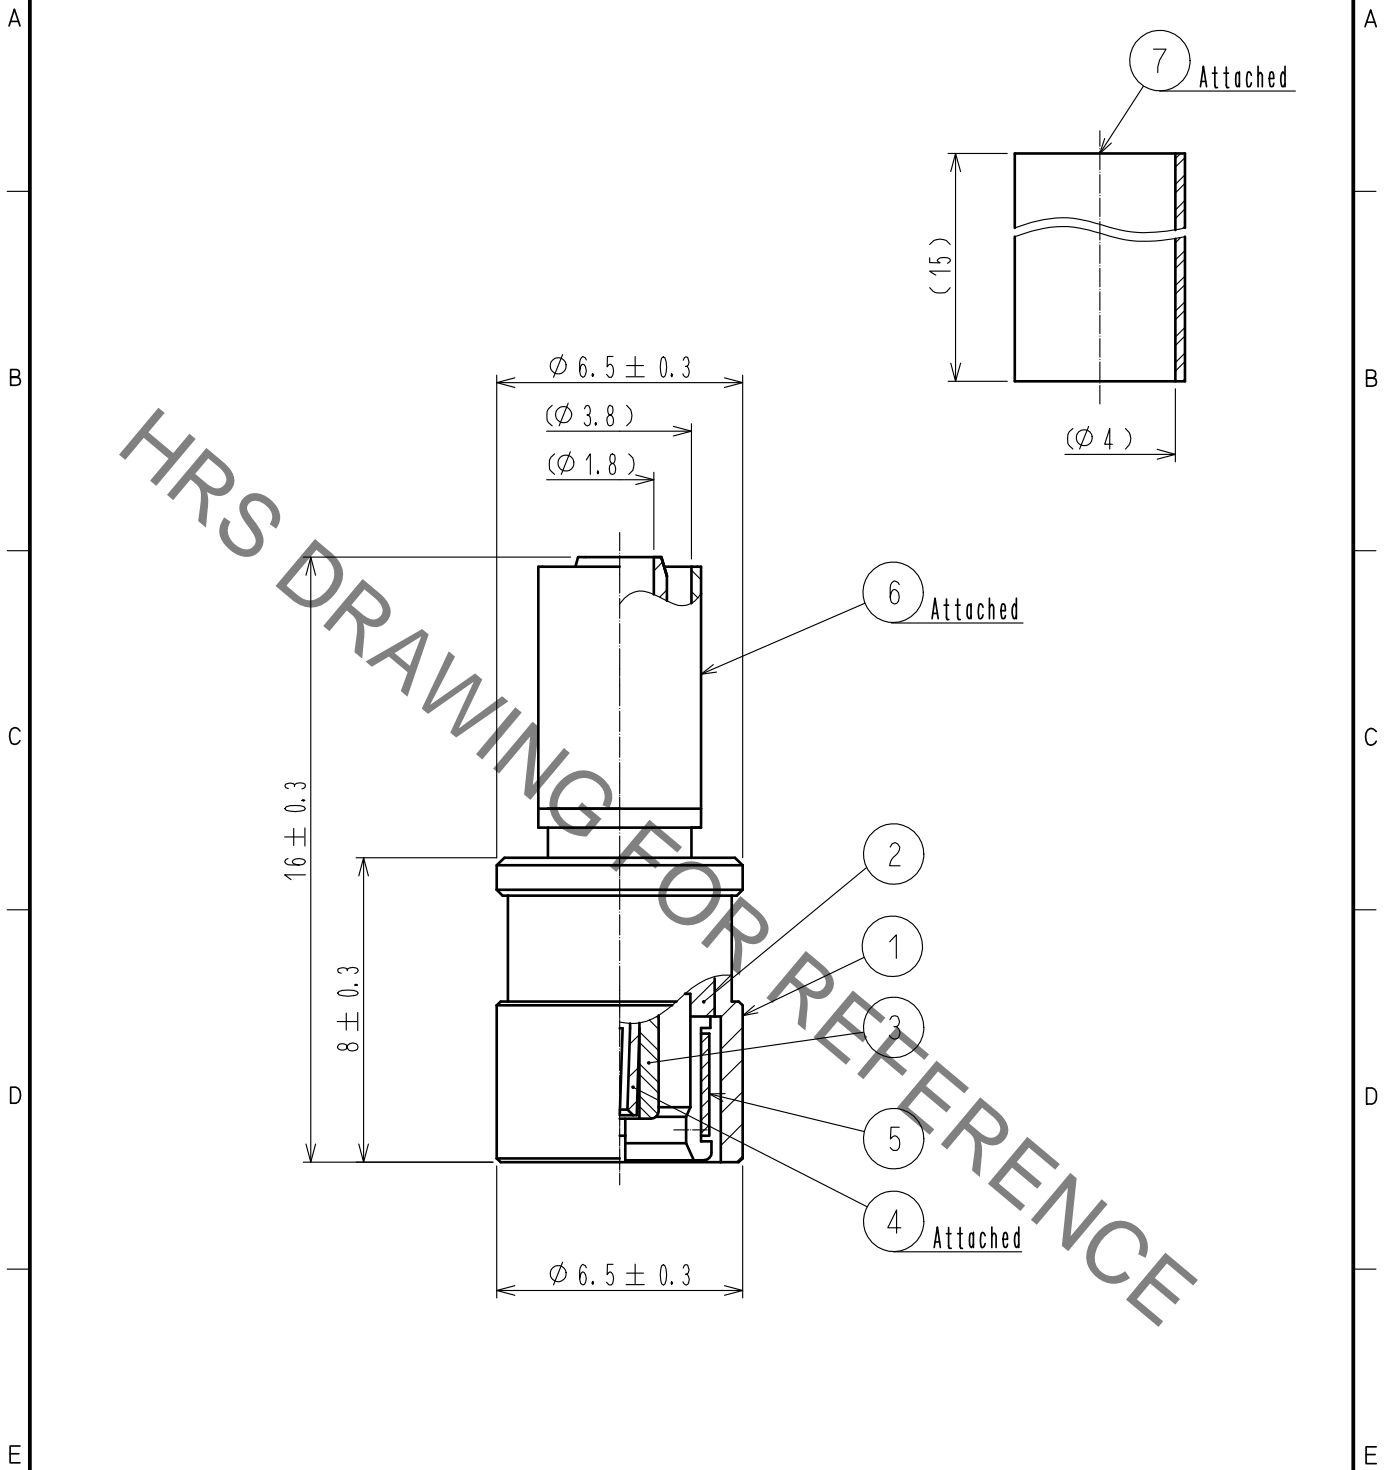

4	Beryllium copper	Gold plating					
3	PTFE		7	Polyolefin	Heat shrink tubing(Black)		
2	Brass	Nickel plating	6	Copper	Nickel plating		
1	Brass	Nickel plating	5	Beryllium copper	Nickel plating		
NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS

UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : TO. KATAYAMA 20201005	DRAWING NO. EDC-332353-00-00				
		CHECKED : TO. KATAYAMA 20201005	PART NO. N. UM-QP-1.5DQS				
		DESIGNED : MK. INOUE 20201005	CODE NO. CL336-0039-0-00				
		DRAWN : MK. INOUE 20201005		1/1			