


1. Mechanical Dimensions:

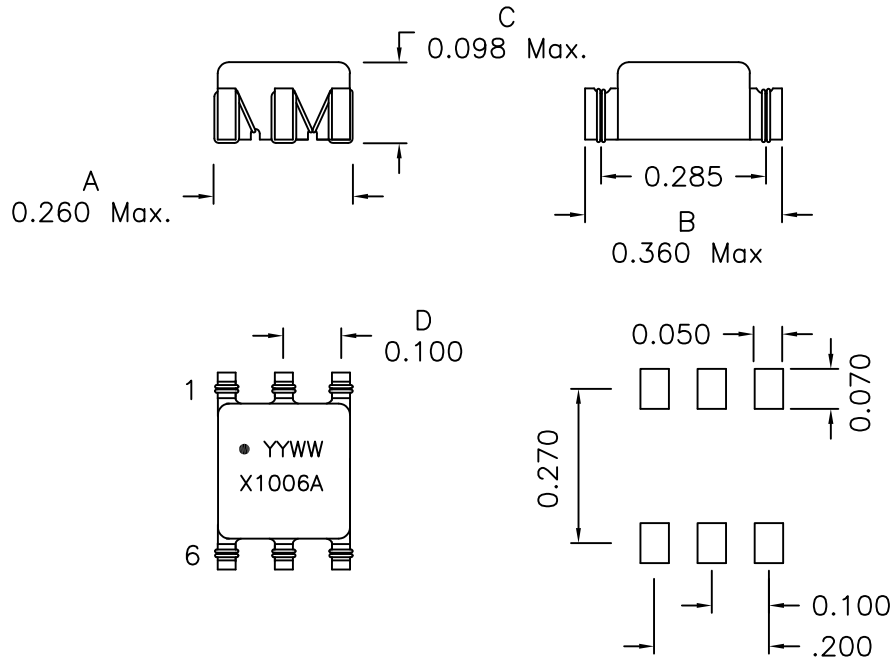


SUGGESTED PAD LAYOUT

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

DOC REV A/3

2. Schematic:



3. Electrical Specifications:

OCL: 100uH +50/-30% @100KHz, 0.10V Each Wdg.

Rated Current: 450mA


DCR: 0.450 Ohms Max. Each Wdg.

Turns Ratio: 1:1:1±2%

Isolation Voltage: 1500Vrms, Wdg. to Wdg. for 60 Secs

Rated Voltage: 80Vdc Max

XFMRs Inc. www.XFMRs.com	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF1006A-CMC11	REV. A
SHEET 1 OF 2	DWN.	Yuan	May-28-15
	CHK.	YK Liao	May-28-15
	APP.	DDC	May-28-15

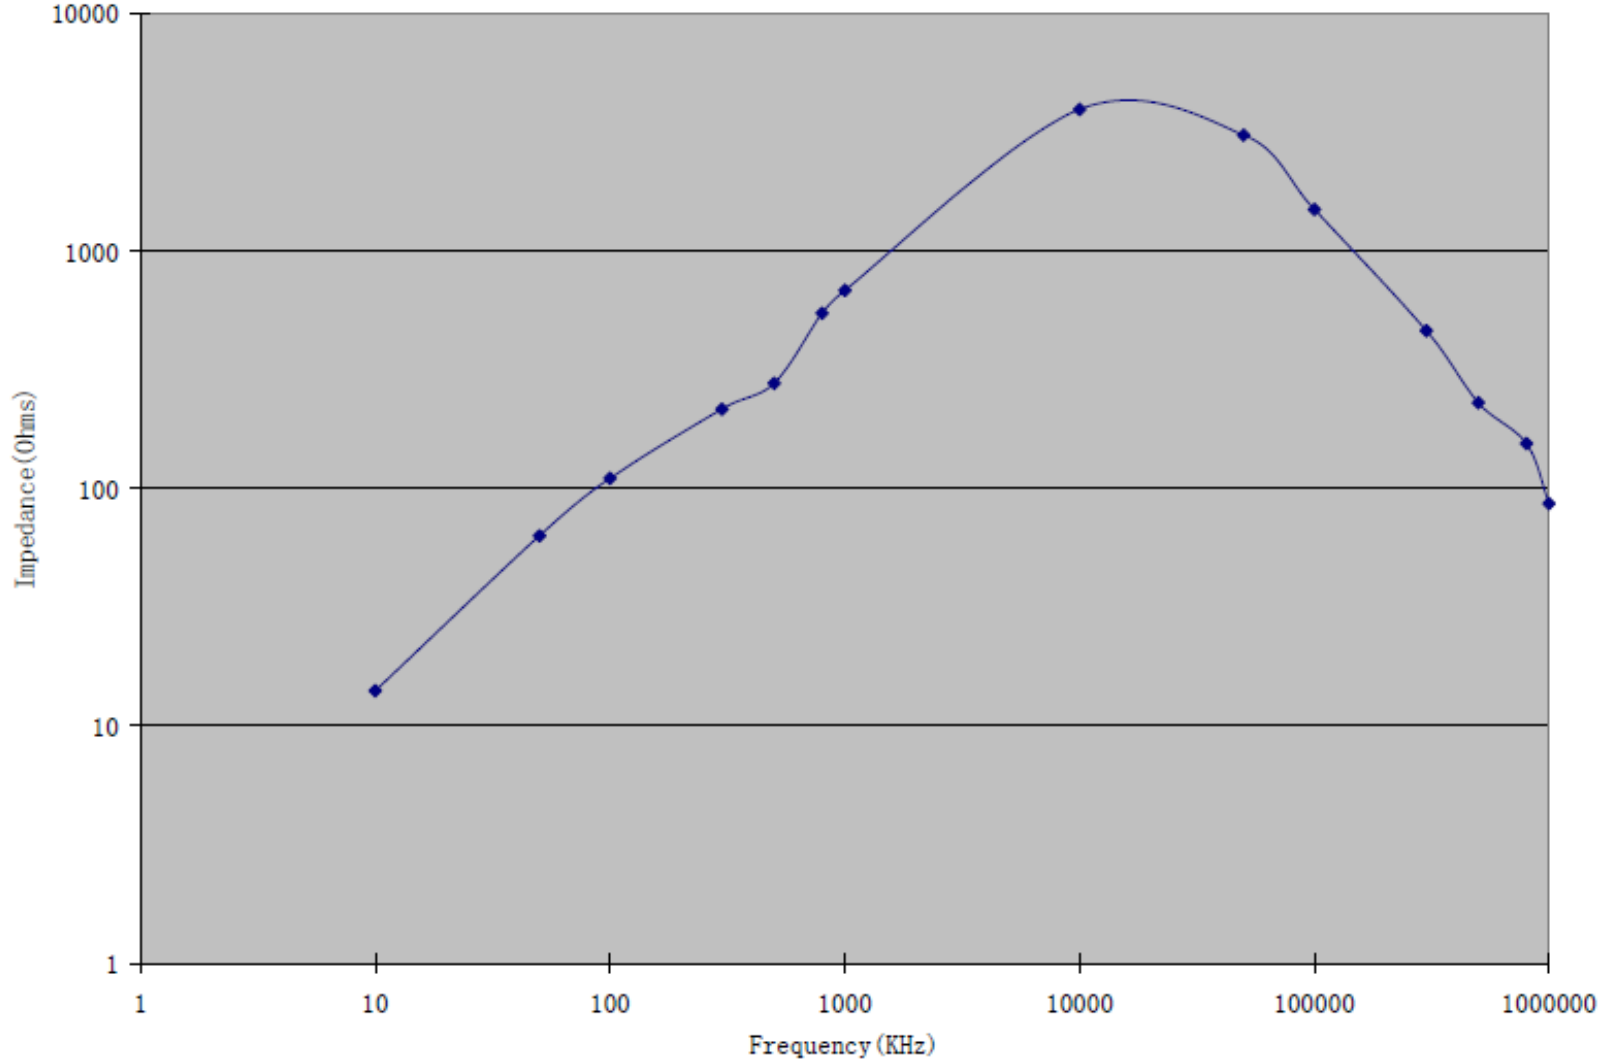

DOC REV A/3

XFMRs Inc. www.XFMRS.com	Title: COMMON MODE CHOKE			
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF1006A-CMC11	REV. A	
SHEET 2 OF 2	DWN.	Yuan	May-28-15	
	CHK.	YK Liao	May-28-15	
	APP.	DDC	May-28-15	

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.