

**SCHOTTKY
SURFACE BRIDGE RECTIFIER**

REVERSE VOLTAGE – 40 Volts
FORWARD CURRENT – 1.0 Amperes

FEATURES

- Rating to 40V PRV
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Qualified according to AEC-Q101 Rev_C


APPLICATION

- Energy saving Lamps
- Mobile Battery charger

MECHANICAL DATA

- Case Material: “Green” molding compound, UL flammability classification 94V-0, “Halogen-free”.
- Moisture Sensitivity: Level 1 per J-STD-020
- Lead free finish, RoHS compliant
- Weight: 98 grams (Approximate)
- Marking code: BABS140

ABS

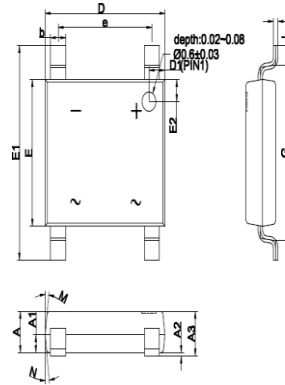

ABS		
DIM	MIN	MAX
A	1.20	1.30
A1	0.43	0.63
A2	0.00	0.10
A3	1.20	1.40
b	0.50	0.80
C	0.10	0.30
D	4.85	5.25
D1	0.45	0.85
e	4.00 TYP.	
E	4.25	4.65
E1	6.40	6.80
E2	0.45	0.85
G	5.20	5.60
L	0.40	0.80
M	7° TYP.	
N	7° TYP.	
All dimension in millimeter		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

ABSOLUTE RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	40	V
Maximum DC blocking voltage	V_{DC}	40	V
Maximum Average rectified output current	$I_{(AV)}$	1.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load.	I_{FSM}	25	A
I^2t Rating for fusing (1ms<t<8.3ms)	I^2t	2.6	A ² S
Operating junction and Storage Temperature range	T_J, T_{STG}	-55 ~ +125	°C

STATIC ELECTRICAL CHARACTERISTICS

PARAMETER	TEST CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage (Note1)	$I_F=1.0A$ $T_J=25^\circ C$ $T_J=100^\circ C$	V_F	-- 0.40	0.50 --	V
Leakage current	$V_R=40V$ $T_J=25^\circ C$ $T_J=100^\circ C$	I_R	-- 1.1	200 100	uA mA

DYNAMIC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TYP	UNIT
Typical junction capacitance (Note 2)	C_J	150	pF

THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	TYP	UNIT
Typical thermal resistance (Note 3,4)	R_{thJc} R_{thJl}	14 20	°C/W

Note :

REV.-1, Nov-2020, KBHA03

- (1) 300us pulse width, 2% duty cycle.
- (2) Measured at 1.0MHz and applied voltage of 4.0VDC.
- (3) Thermal resistance test performed in accordance with JESD-51.
- (4) The unit mounted on glass-epoxy substrate with 1oz/ft²_2

Please be aware that an **Important Notice and Disclaimer** concerning availability, disclaimers, and use in critical applications of LSC products thereto appears at the end of this Data Sheet.

FIG.1 FORWARD CURRENT DERATING CURVE

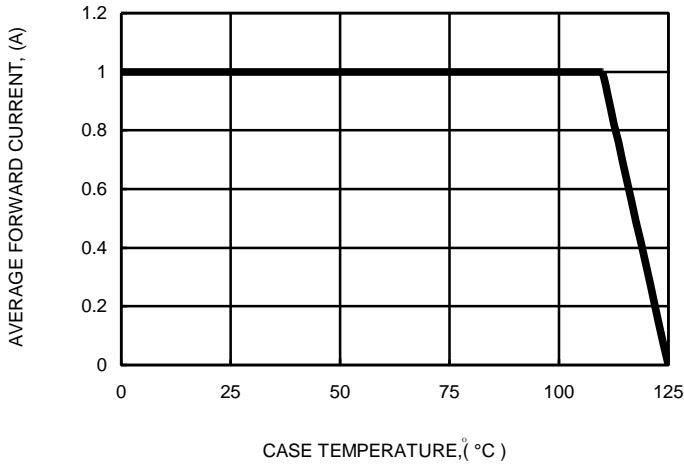


FIG.2 MAXIMUM NON-REPETITIVE SURGE CURRENT

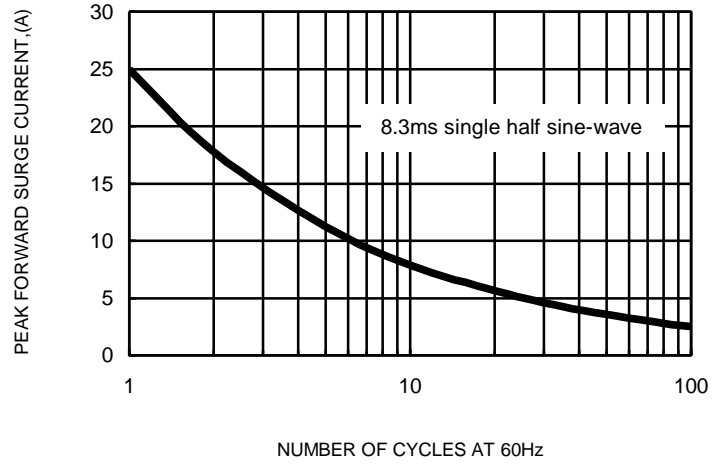


FIG.3 TYPICAL FORWARD CHARACTERISTICS

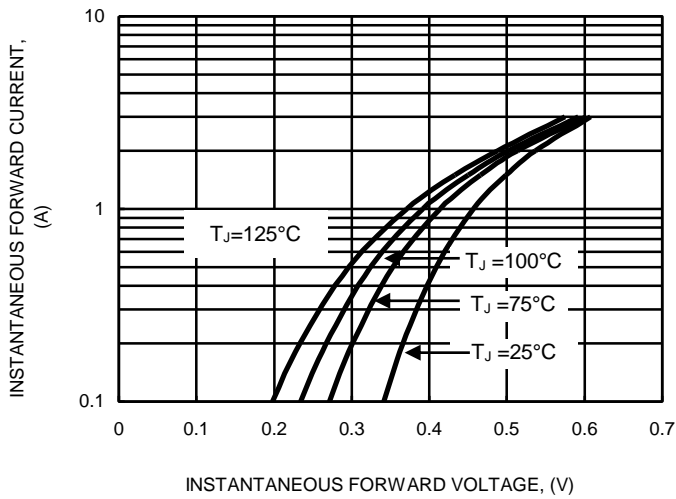


FIG.4 TYPICAL JUNCTION CAPACITANCE


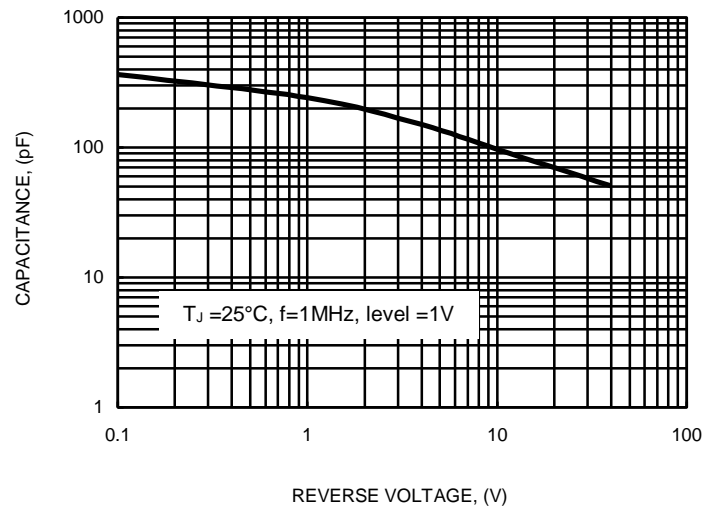



FIG.5 TYPICAL REVERSE CHARACTERISTICS

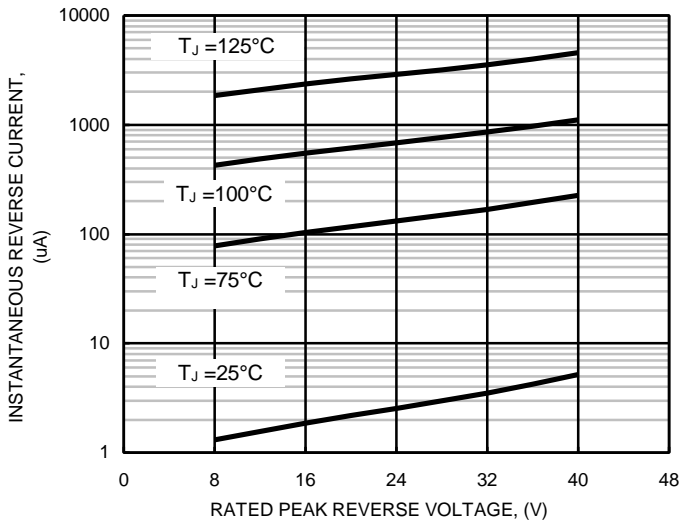

Embossed Carrier Dimensions

Packed per EIA/JEDEC standard RS-481
8, 12, 16, 24mm Tape only

Embossed Carrier
Dimensions

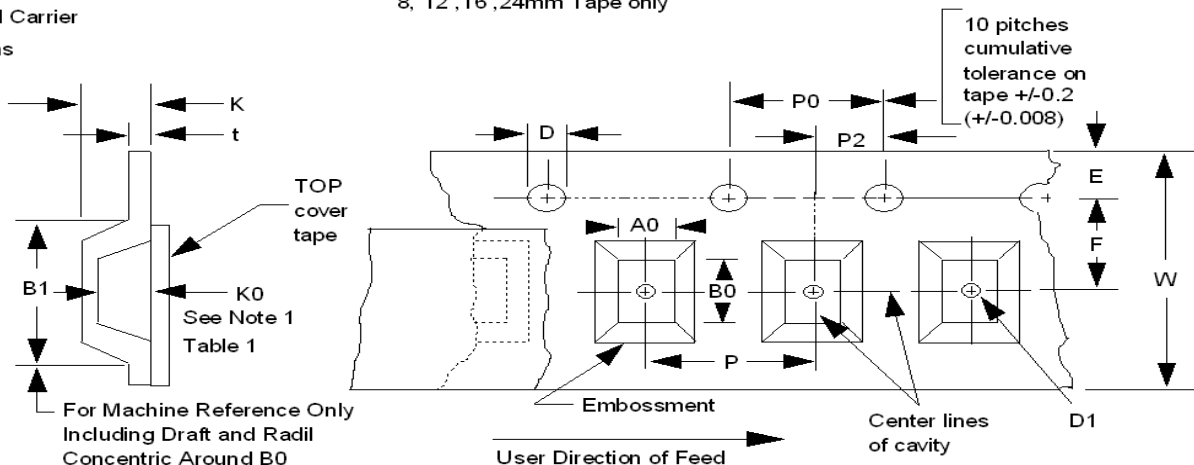

EMBOSSED TYPE


ALL DIMENSION IN MILLIMETERS AND (INCHES)

TAPE SIZE	D	E	PO	t (MAX)	A0B0K0	CONSTANT DIMENSION
12mm	1.55+0.10/-0.0 (0.059 +0.004 -0.00)	1.75+/-0.10 (0.069+/-0.004)	4.0+/-0.10 (0.157+/-0.004)	0.6 (0.024)	SEE NOTE 1	



TAPE SIZE	B1 MAX	D1 MIN	F	K MAX	P2	R	W	P	VARIABLE DIMENSIONS
12mm	8.2 (0.323)	1.5 (0.59)	5.5+/-0.05 (2.17+/-0.002)	4.5 (0.117)	2.0+/-0.05 (0.079+/-0.002)	30 (1.181)	12.0+/-0.30 (0.472+/-0.012)	8.0+/-0.10 (0.315+/-0.004)	

Note 1: A0B0K0 are determined by component size. The clearance between the component and the cavity must be within 0.05 min. to 0.50 max. for 8 mm tape. 0.05 min. to 0.65 max. for 12mm tape. 0.15 min. to 0.90 max. for 16mm tape and 0.05 min. to 1.00 max. for 24 mm tape and larger. the component cannot rotate more than 20 within the determined cavity. see sketch "A" below.


2: Tape and component shall pass around radius "R" without damage

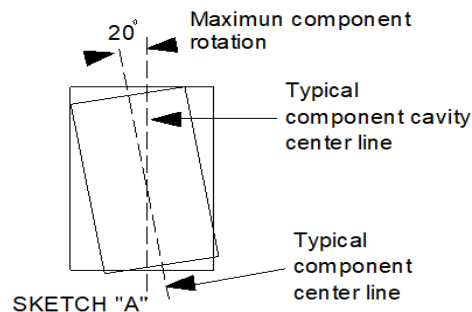


Polar Units

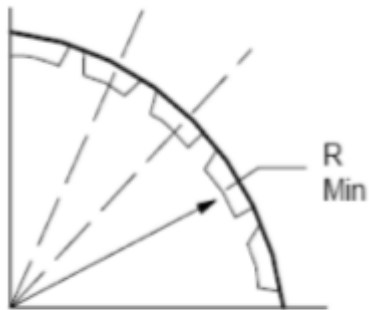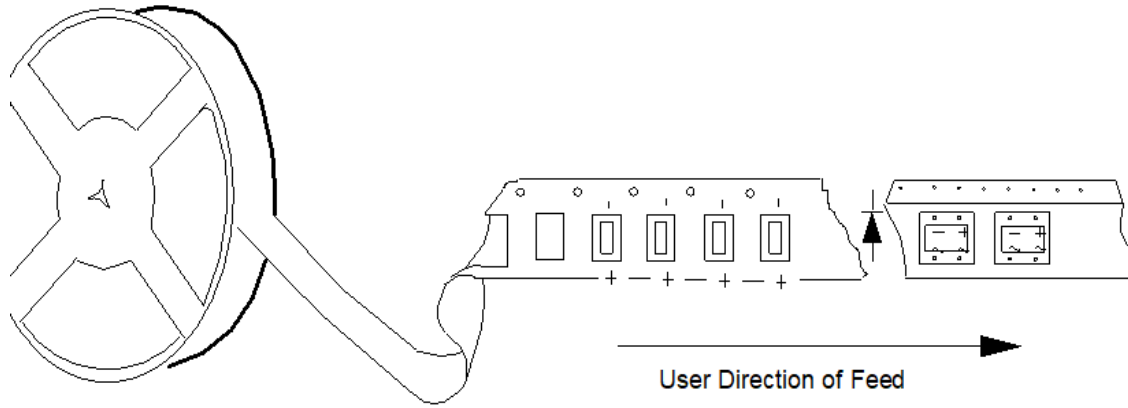

Bending radius
see Note 2

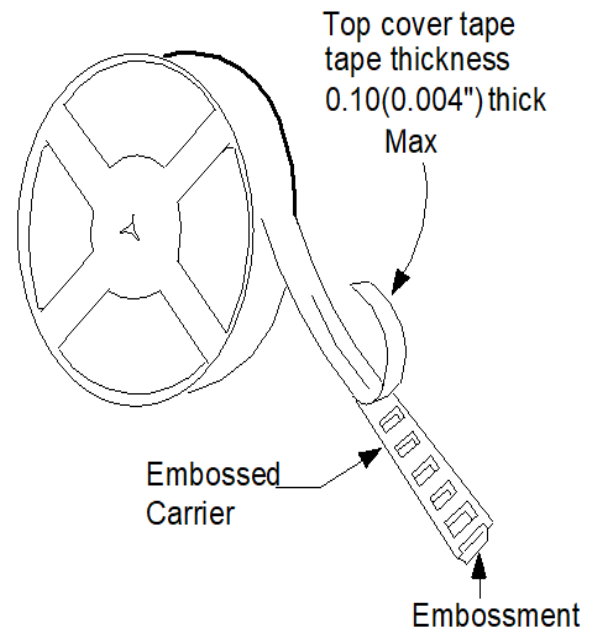


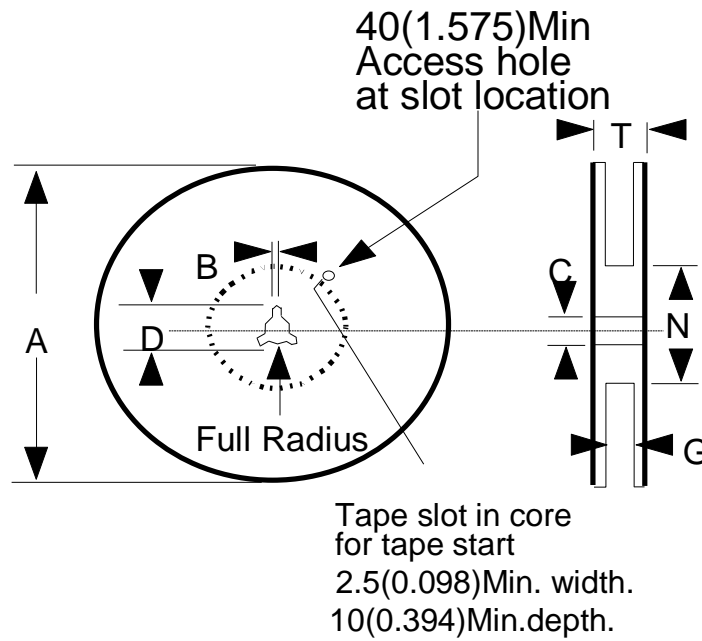


REEL DIMENSIONS

TAPE SIZE	A MAX	B MAX	C	D MIN	N MIN	G	T MAX
12mm	330 (13.0)	1.5 (0.06)	13.0+/-0.5 (0.512+/-0.020)	20.2 (0.80)	7.5 (2.952)	12.4+2.0/-0.0 (0.488+0.078/-0.0)	18.4 (0.724)

1. SMA/B 襯板

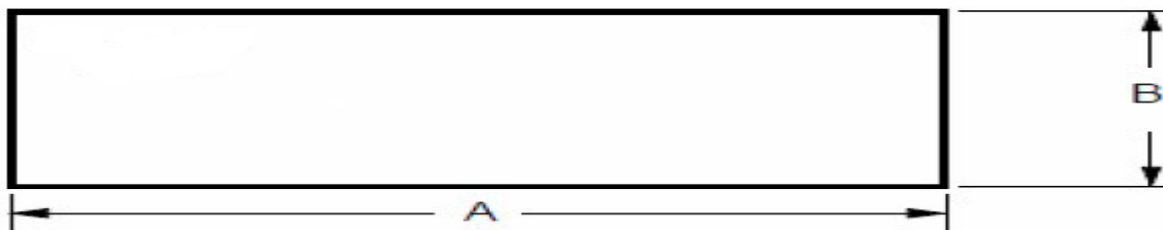

2. CARTON

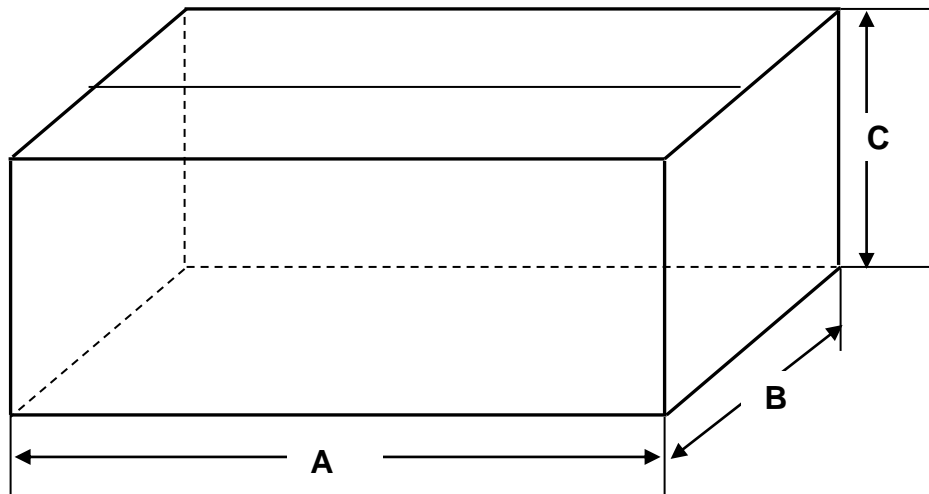

UNIT:mm

DEVICE TYPE	Q'TY/REEL (PCS)	REEL DIA (mm)	襯板 SIZE (mm)	CARTON SIZE (mm)	Q'TY/CARTON (PCS)
ABS	3000	330	1300x200	355x245x350	36K

IMPORTANT NOTICE AND DISCLAIMER

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design purchase or use.

ALL INFORMATION ARE PROVIDED AS-IS, EVEN IT HAS QUALIFIED BY THE AEC-Q101 WHICH SATISFY INDUSTRIAL APPLICATION REQUIREMENT, EXCEPT AS EXPRESSLY STATED IN THIS DATA SHEET IS APPLIED FOR AUTOMOTIVE GRADE, LSC MAKE NO WARRANTIES, REPRESENTATION OR GUARANTEE, WHETHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, WITHOUT LIMITATION, REGARDING ANY MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE LSC TECHNOLOGY.

LSC DOES NOT ASSUME ANY LIABILITY OR COMPENSATION FOR ANY APPLICATION ASSISTANCE OR CUSTOMER PRODUCT DESIGN, AND MAKE NO WARRANTY OR ACCEPT ANY LIABILITY WITH PRODUCTS, WHICH ARE PURCHASED OR USED FOR ANY UNINTENDED OR UNAUTHORIZED APPLICATION.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.