

M81716FP

GENERAL PURPOSE DRIVER

DESCRIPTION

M81716FP is a dual buffer type general purpose driver by 24V rating voltage.


FEATURES

- RATING VOLTAGE 24V
- OUTPUT CURRENT +0.8A, -0.6A
- POWER-SUPPLY RANGE OF OPERATION ... 4.5V ~ 24V
(RECOMMENDATION POWER SUPPLY RANGE : 4.5V ~ 17 V)
- HIGH-SPEED SWITCHING TIME
(22ns typ, CL = 1000pF)
- DUAL BUFFER
- SOP-8 PACKAGE

APPLICATIONS

Motor drive, switching power supply, DC/DC converter and general purpose.


PIN CONFIGURATION (TOP VIEW)

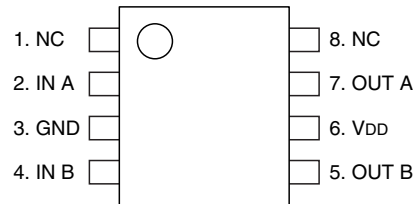



NC:NO CONNECTION

Outline:8P2S

BLOCK DIAGRAM

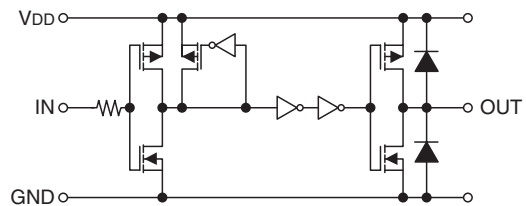

SWITCHING TIME EXAMINATION CIRCUIT DIAGRAM

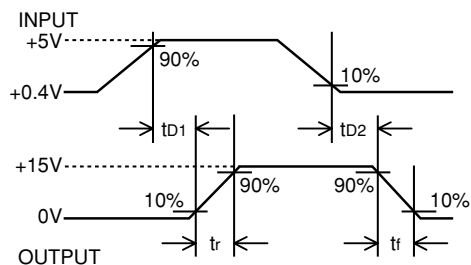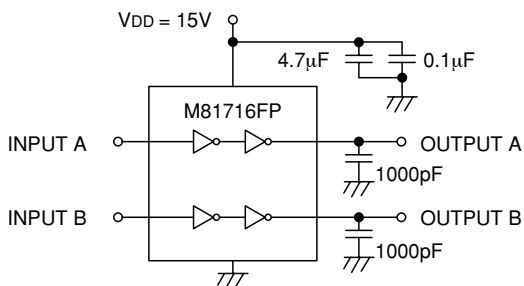

※ INPUT
RISE AND FALL
TIMES = 5ns

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C unless otherwise specified)

Symbol	Parameter	Test conditions	Ratings	Unit
VDD	Supply Voltage		0 ~ 24	V
VIN	Logic Input Voltage	IN A/B Terminal	GND-0.3 ~ VDD+0.3	V
Pd	Package Power Dissipation	Ta = 25°C, On Board	0.5	W
Tj	Junction Temperature		-40 ~ 125	°C
Tstg	Storage Temperature		-40 ~ 125	°C

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
VDD	Supply Voltage		4.5	—	17	V
VIN	Logic Input Voltage	IN A/B Terminal	GND	—	VDD	V
Topr	Operation Temperature		-40	—	100	°C

* For proper operation, the device should be used within the recommended conditions.

ELECTRICAL CHARACTERISTICS (AC characteristic ; VDD = 15V, VIN = 0V, 5V)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.*	Max.	
tr	Turn-On Rise Time	CL = 1000pF	—	35	—	ns
tf	Turn-Off Fall Time	CL = 1000pF	—	25	—	ns
tD1	Delay Time1	CL = 1000pF	—	22	—	ns
tD2	Delay Time2	CL = 1000pF	—	22	—	ns

* Typ. is not specified.

ELECTRICAL CHARACTERISTICS (DC characteristic ; VDD = 4.5V ~ 17V)







Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.*	Max.	
VIH	High Level Input Threshold Voltage	VDD = 15V	4.4	—	—	V
VIL	Low Level Input Threshold Voltage	VDD = 15V	—	—	1.8	V
IIN	Input Bias Current	VIN = 0V or VDD	-1	—	1	μA
VOH	High Level Output Voltage	IO = 0A	VDD-0.1	—	—	V
VOL	Low Level Output Voltage	IO = 0A	—	—	0.1	V
Issup	VDD Supply Current	VDD = 15V, VIN = 5V(both inputs)	—	4.0	8.0	mA
		VDD = 15V, VIN = 0V(both inputs)	—	—	0.05	mA
IOH	Output High Level Short Circuit Pulsed Current	VDD = 15V, PW ≤ 10μs, VOUT = 0V	0.80	1.00	—	A
IOL	Output Low Level Short Circuit Pulsed Current	VDD = 15V, PW ≤ 10μs, VOUT = 9V	0.60	0.80	—	A
ROUT	Output High Level On Resistance	VDD = 15V, Iload = 10mA, VOUT = "H"	—	7	12	Ω
	Output Low Level On Resistance	VDD = 15V, Iload = 10mA, VOUT = "L"	—	6	11	Ω







* Typ. is not specified.

PW : Input Pulse Wide

Iload : Supply input-and-output current to the OUT A/B terminal

PERFORMANCE CURVES

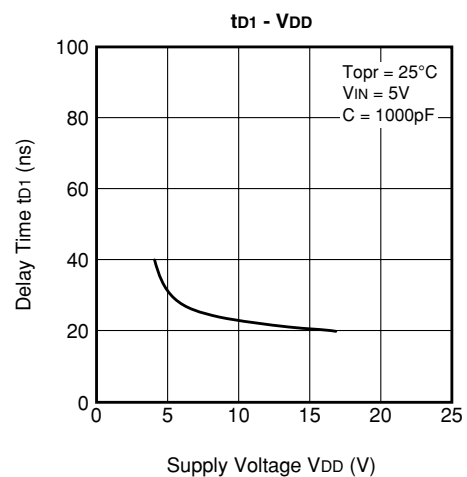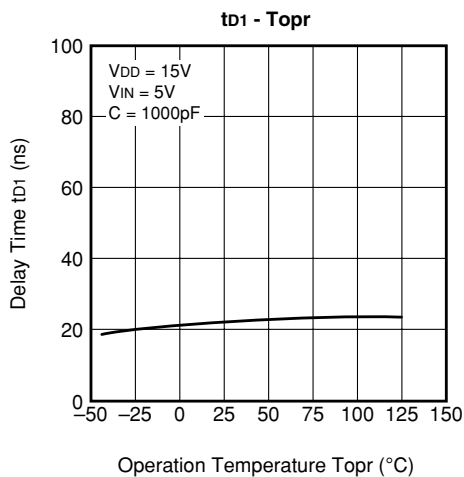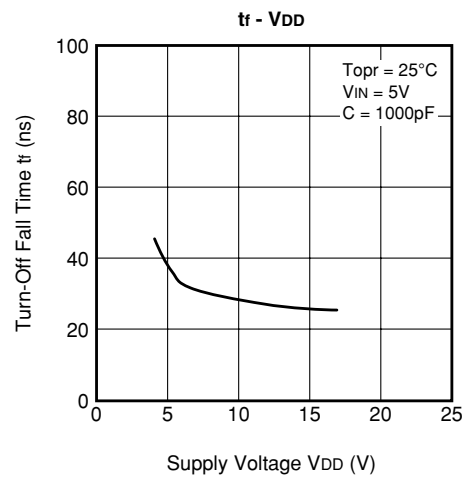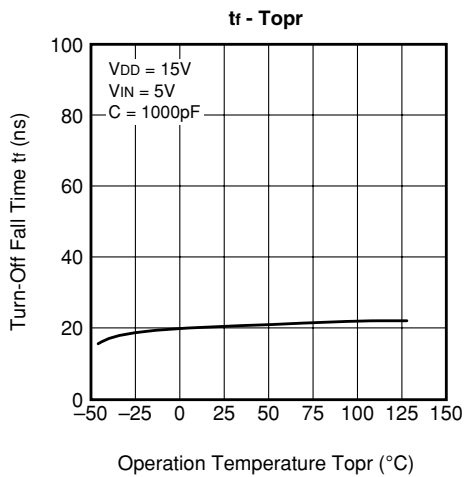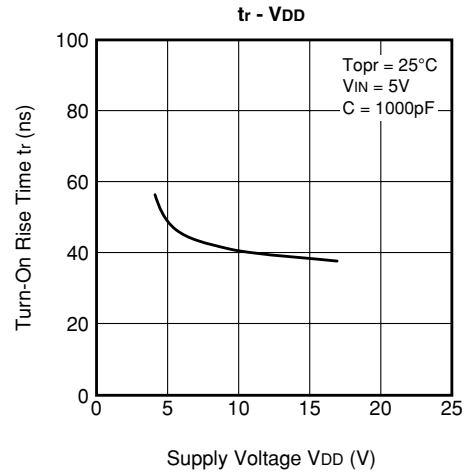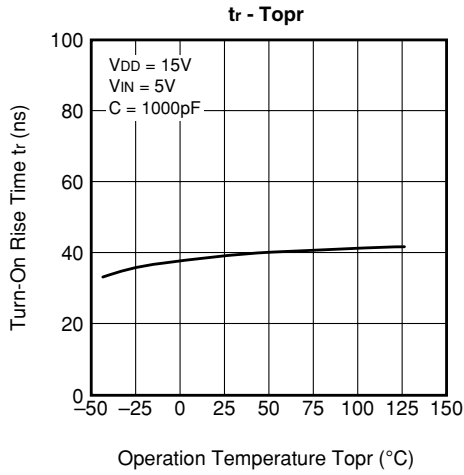

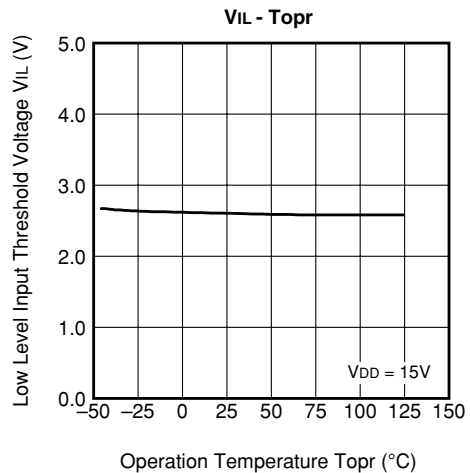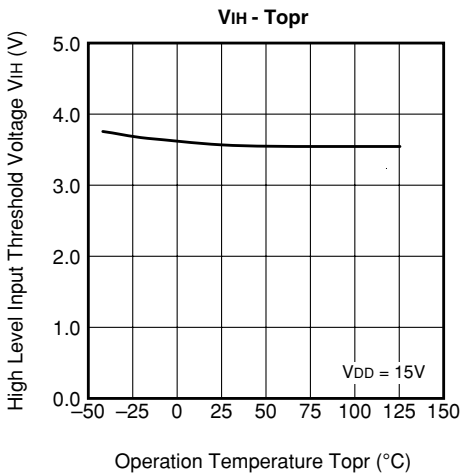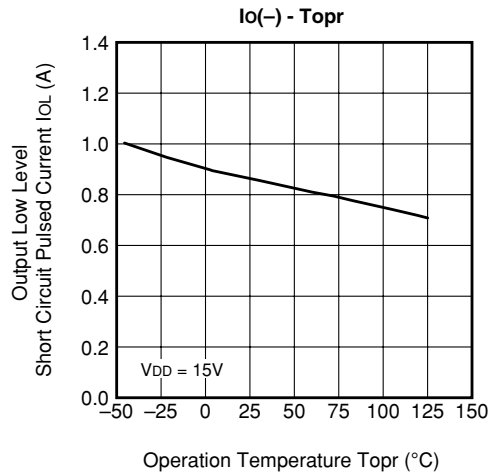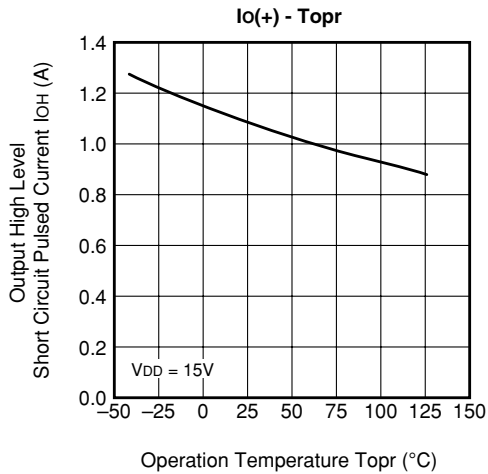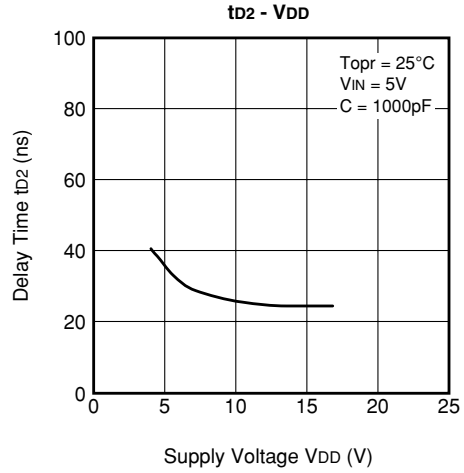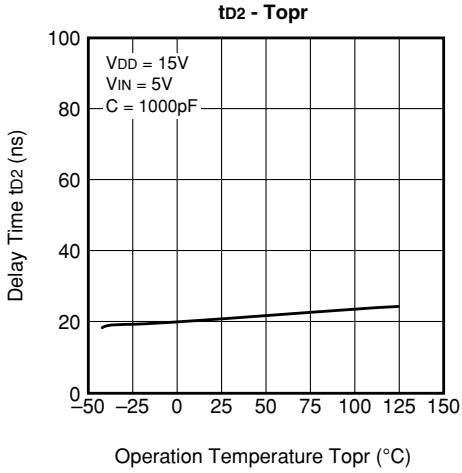

M81716FP

GENERAL PURPOSE DRIVER






PACKAGE OUTLINE

8P2S-A

(MMP)


Plastic 8pin 225mil SOP

EIAJ Package Code SOP8-P-225-1.27	JEDEC Code -	Weight(g) 0.07	Lead Material Cu Alloy
--------------------------------------	-----------------	-------------------	---------------------------



Detail G

Detail F



Recommended Mount Pad

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	-	-	1.9
A1	0.05	-	-
A2	-	1.5	-
b	0.35	0.4	0.5
c	0.13	0.15	0.2
D	4.8	5.0	5.2
E	4.2	4.4	4.6
e1	-	1.27	-
HE	5.9	6.2	6.5
L	0.2	0.4	0.6
L1	-	0.9	-
Z	-	0.595	-
Z1	-	-	0.745
x	-	-	0.25
y	-	-	0.1
θ	0°	-	10°
b2	-	0.76	-
e1	-	5.72	-
l2	1.27	-	-