

Programmable Shunt Regulator


BL432

FEATURES

- Low dynamic output impedance 0.20 typical
- Sink current capability of 1.0 to 100mA
- Equivalent full-range temperature coefficient of 50ppm/°C typical
- Temperature compensated for operation over full rated Operating temperature range
- Low output noise voltage
- Fast turn-on response



HF

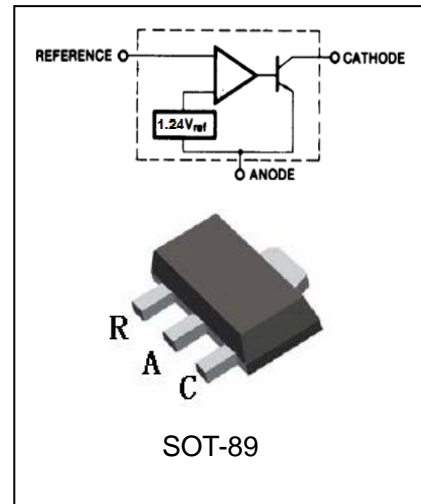

ORDERING INFORMATION

Type No.	Marking	Package Code
BL432□	432	SOT-89

□: none is for Lead Free package;
“G” is for Halogen Free package.

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Parameter	symbol	limits	unit
Cathode Voltage	V_{KA}	15	V
Cathode current Range(Continuous)	I_{KA}	100	mA
Reference Input Current Range	I_{REF}	-0.05 to +3	mA
Power dissipation	P_D	330	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	350	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	155	°C/W
Operating Temperature Range	T_{OPR}	0 to 70	°C
Operating Junction Range	T_J	-40 to +150	°C
Storage temperature Range	T_{STG}	-65 to +150	°C

Programmable Shunt Regulator

BL432

Recommended Operating Conditions

Parameter	symbol	Min	Typ	Max	Unit
Cathode Voltage	V_{KA}	V_{REF}	-	15	V
Cathode Current	I_{KA}	1.0	-	100	mA





ELECTRICAL CHARACTERISTICS @ $T_a=25^{\circ}\text{C}$ unless otherwise specified

Parameter	symbol	conditions	Min.	Typ.	Max.	unit	
Refer Input Voltage	V_{REF}	$V_{KA}=V_{REF}, I_{KA}=10\text{mA}$	0.5%	1.233	1.247	V	
			1%	1.228			1.24
			2%	1.215			1.252
Deviation of Reference Input Voltage Over Full Temperature Range	$\Delta V_{REF}/\Delta T$	$V_{KA}=V_{REF}, I_{KA}=10\text{mA}$ $T_A=\text{Full Range}$		10	25	mV	
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	$\Delta V_{REF}/\Delta V_{KA}$	$V_{KA}=1.25\text{V to }14.5\text{V}$		1.0	2.7	mV/V	
Reverse Input current	I_{REF}	$R_1=10\text{K}\Omega, R_2=\infty$		0.5	1	μA	
Deviation of Reference Input Current Over Full Temperature Range	$\Delta I_{REF}/\Delta T$	$R_1=10\text{K}\Omega, R_2=\infty$ $T_A=\text{Full Range}$		0.05	0.3	μA	
Minimum Cathode Current for Regulation	$I_{KA(\text{MIN})}$	$V_{KA}=V_{REF}$		60	80	μA	
Off-Stage Cathode Current	$I_{KA(\text{OFF})}$	$V_{KA}=15\text{V}, V_{REF}=0$		0.04	0.5	μA	
Dynamic Impedance(Note2)	Z_{ZA}	$V_{KA}=V_{REF}, I_K=0.1\text{ mA}\sim 20\text{ mA}$ $f\leq 1.0\text{kHz}$		0.2	0.4	Ω	

Programmable Shunt Regulator

BL432

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

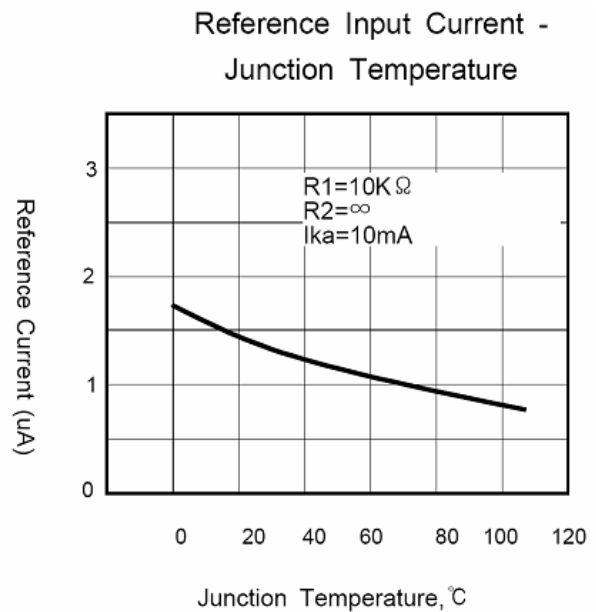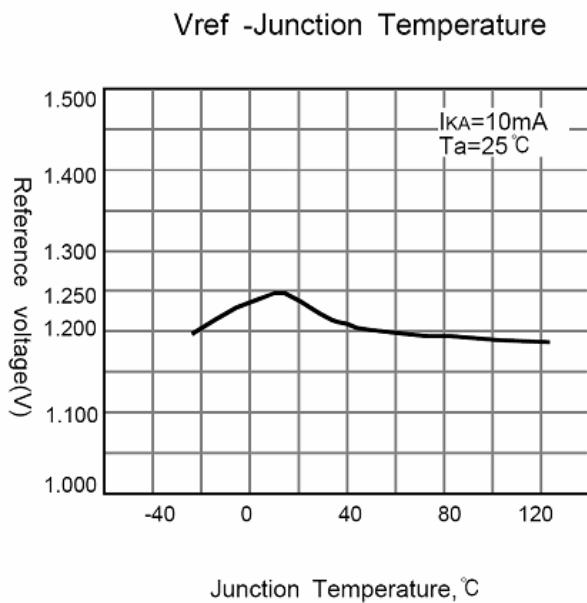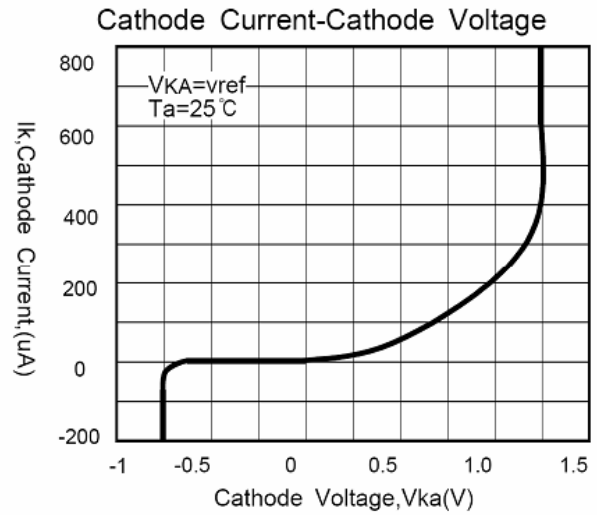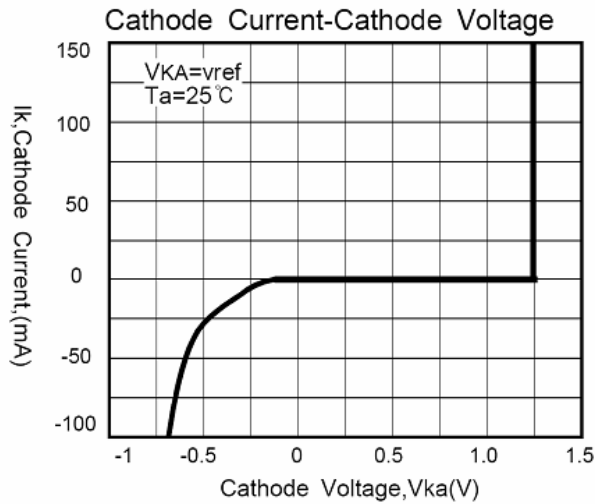


Programmable Shunt Regulator

BL432


PACKAGE OUTLINE

Plastic surface mounted package

SOT-89

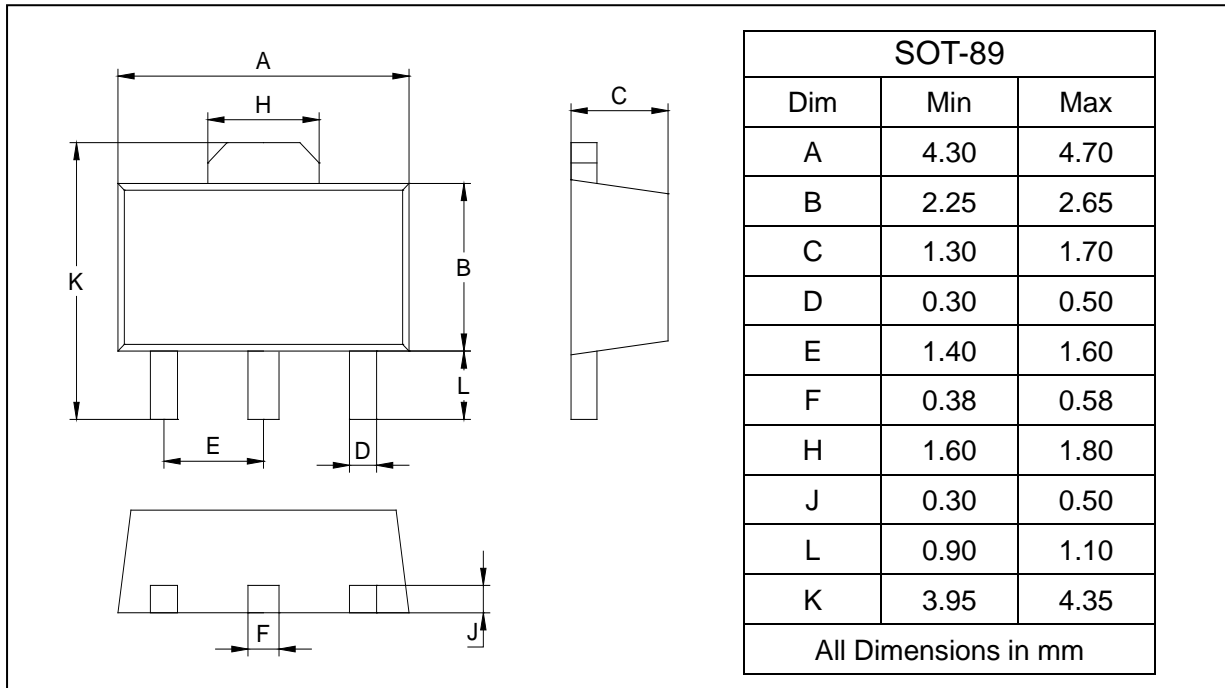

SOLDERING FOOTPRINT

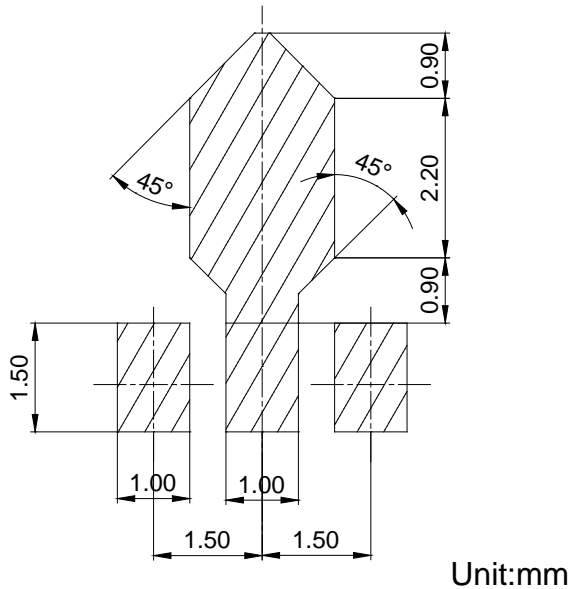

PACKAGE INFORMATION

Device	Package	Shipping
BL432	SOT-89	1000/Tape&Reel