



# DATA SHEET

## SB2020FCT~SB20100FCT

**ISOLATION SCHOTTKY BARRIER RECTIFIERS**  
**VOLTAGE- 20 to 100 Volts CURRENT - 20.0 Ampere**

**ITO-220AB**


Unit: inch ( mm )

### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O. Flame Retardant Epoxy Molding Compound.
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency.
- Low forward voltage, high current capability
- High surge capacity.
- For use in low voltage, high frequency inverters free wheeling , and polarity protection applications.

### MECHANICAL DATA

Case: ITO-220AB Molded plastic  
Terminals: Solder plated, solderable per MIL-STD-202, Method 208  
Polarity: As marked.  
Standard packaging: Any  
Weight: 0.08 ounces, 2.24grams.

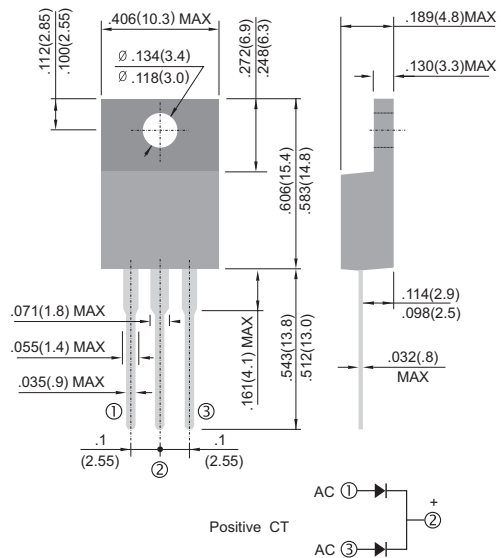

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%


	SB2020FCT	SB2030FCT	SB2040FCT	SB2050FCT	SB2060FCT	SB2080FCT	SB20100FCT	UNIT
Maximum Recurrent Peak Reverse Voltage	20.0	30.0	40.0	50.0	60.0	80.0	100.0	V
Maximum RMS Voltage	14.0	21.0	28.0	35.0	42.0	56.0	70.0	V
Maximum DC Blocking Voltage	20.0	30.0	40.0	50.0	60.0	80.0	100.0	V
Maximum Average Forward Rectified Current at Tc=90°C	20							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	150							A
Maximum Instantaneous Forward Voltage at 10.0A per element	0.55			0.75			0.85	v
Maximum DC Reverse Current (Note 1) Ta=25°C at Rated DC Blocking Voltage Ta=100°C				0.5 100				mA
Typical Thermal Resistance Note RθJA	100							°C/W
Operating and Storage Temperature Range Tj	-50 to +125							°C

### NOTES:


1. Thermal Resistance Junction to Ambient .




**RATING AND CHARACTERISTIC CURVES**

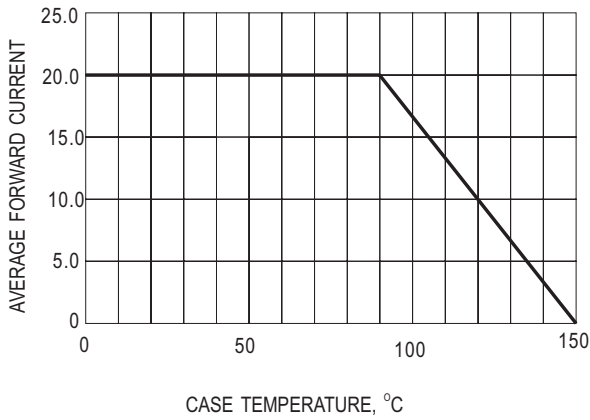


**Fig.1- FORWARD CURRENT DERATING CURVE**

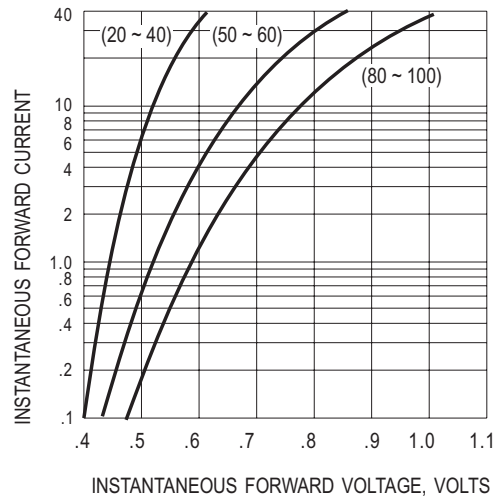


**Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC**

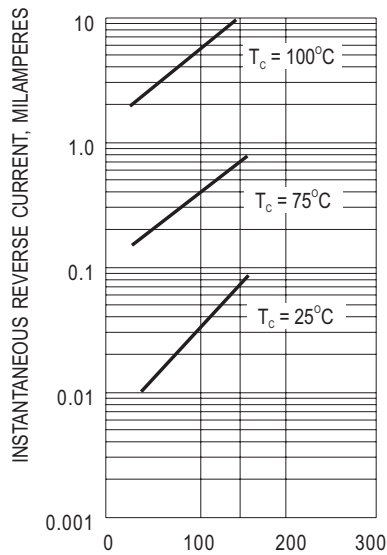

**Fig.3- TYPICAL REVERSE CHARACTERISTIC**

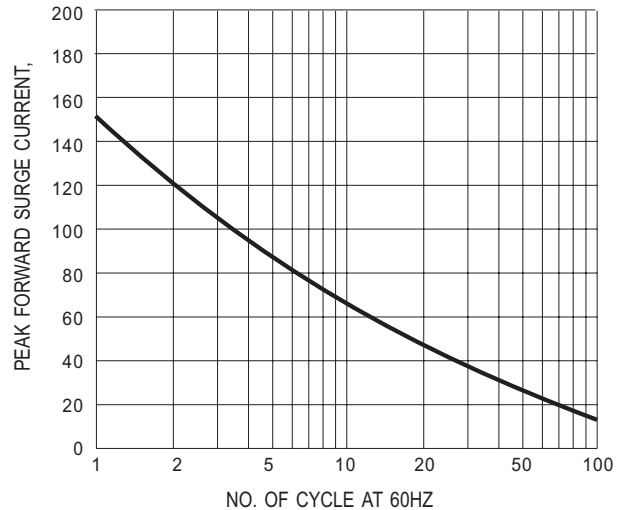

**Fig.4- MAXIMUM NON-REPETITIVE SURGE CURRENT**

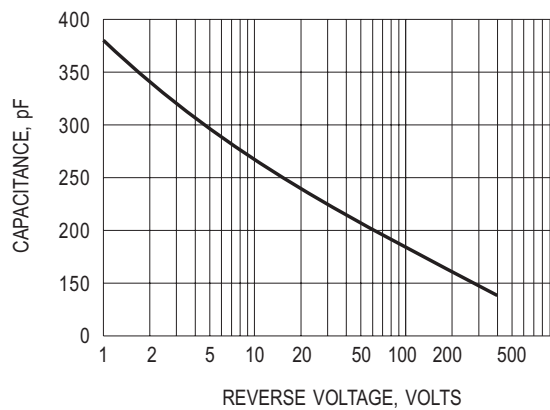

**Fig.5- TYPICAL JUNCTION CAPACITANCE**