

## MBRF1040CT-HF Thru. MBRF1060CT-HF

Forward current: 10A

Reverse voltage: 40 to 60V

RoHS Device

Halogen Free




### Features

- High Current Capability
- Low Switching Noise
- High Surge Capability
- Low Power Loss & High Efficiency
- Guard Ring Protection
- Pd-free lead plating & Halogen-free part

### Mechanical data

- Molded Plastic Low profile ITO-220AB
- Plastic materials used carries underwriters laboratory flammability classification UL94V-0
- Lead Temperature for Soldering Purposes : 265°C Max. for 10 Seconds
- Device Weight : Approximated 2.25 grams

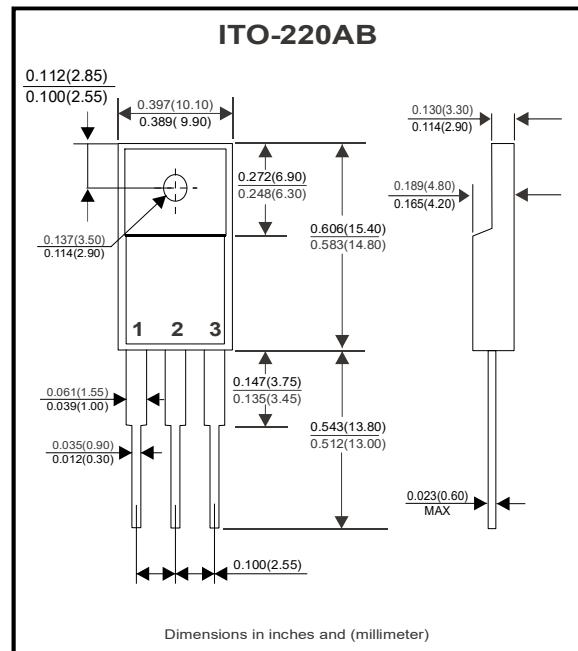

### Circuit diagram



### Maximum Ratings and Electrical Characteristics (at TA=25°C unless otherwise specified)

Parameter	Symbol	MBRF 1040CT	MBRF 1060CT	Units
DC Blocking Voltage	V <sub>RM</sub>			
Working Peak Reverse Voltage	V <sub>RWM</sub>	40	60	V
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>			
Average Rectified Output Current (Total Device)	I <sub>O</sub>	10		A
Non-Repetitive Peak Forward Surge Current (Per Leg) (Surge applied at rated load conditions half wave, single phase, 60Hz)	I <sub>FSM</sub>	125		A
Instantaneous Forward Voltage (Per Leg) I <sub>F</sub> = 5A , T <sub>A</sub> = 25°C I <sub>F</sub> = 5A , T <sub>A</sub> = 125°C	V <sub>F</sub>	0.65 0.55	0.75 0.65	V
Instantaneous Reverse Current (Per Leg) V <sub>R</sub> = V <sub>RRM</sub> , T <sub>A</sub> = 25°C V <sub>R</sub> = V <sub>RRM</sub> , T <sub>A</sub> = 125°C	I <sub>R</sub>	0.1 10		mA

## Thermal Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise specified )

Parameter	Symbol	Value	Units
Maximum Thermal Resistance (Junction to Case)	$R_{\theta_{JC}}$	2.0	$^\circ\text{C} / \text{W}$
Operating & Storage Junction Temperature	$T_J$	175	$^\circ\text{C}$
	$T_{STG}$	- 65 to +175	

NOTE : 1.Thermal resistance from junction to case per leg, with heatsink(1.35" x 0.95" x 0.18") Al-plate.

## Ratings and Characteristics Curves ( $T_A = 25^\circ\text{C}$ unless otherwise specified )

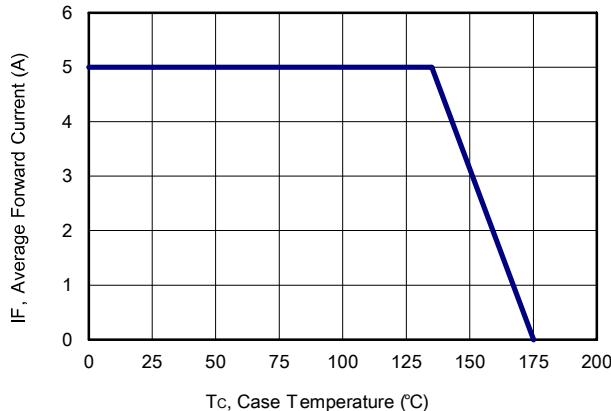


Figure 1: Current Derating Curves

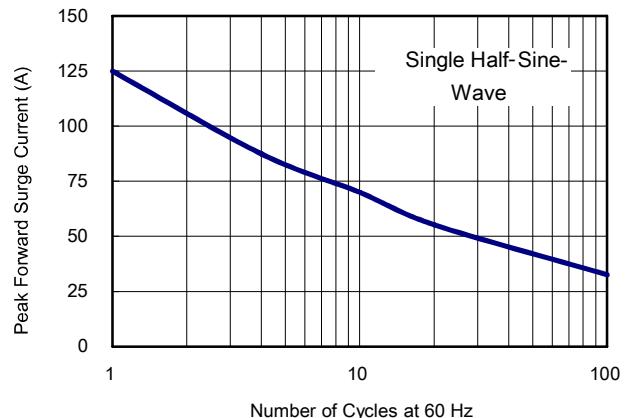


Figure 2: Peak Forward Surge Current (Per Leg)

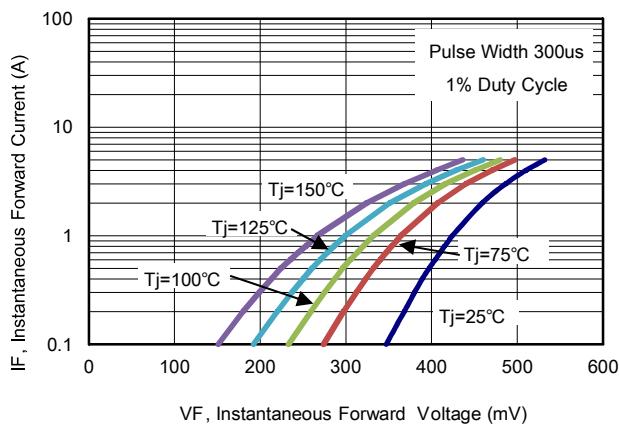


Figure 3: Typical Forward Characteristics  
(MBRF1040CT) (Per Leg)

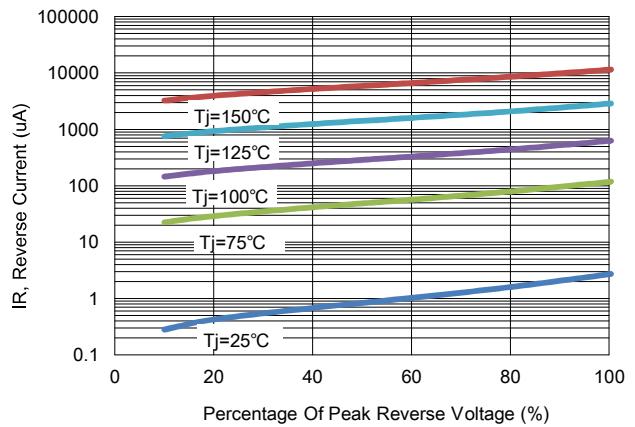


Figure 4: Typical Reverse Characteristics  
(MBRF1040CT) (Per Leg)

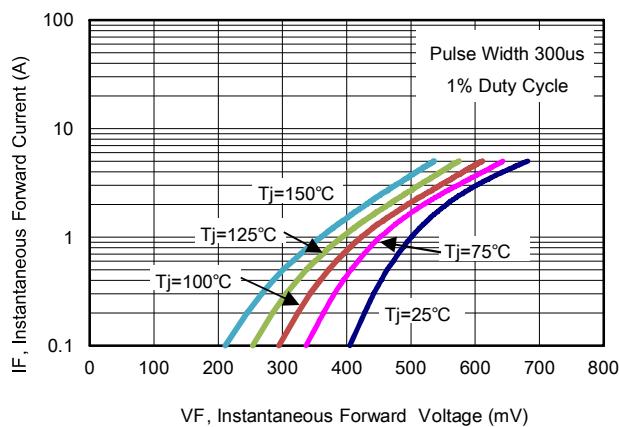


Figure 5: Typical Forward Characteristics  
(MBRF1060CT) (Per Leg)

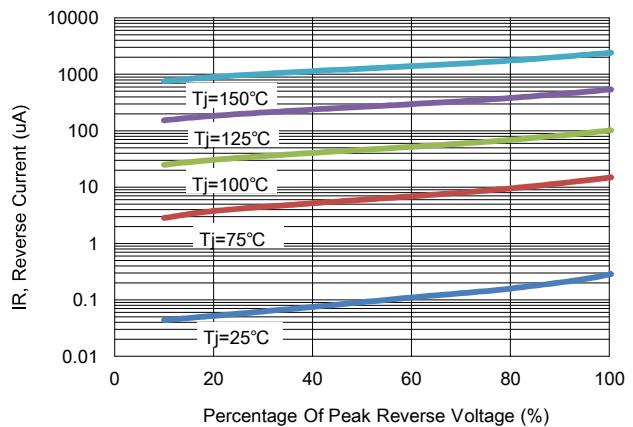



Figure 6: Typical Reverse Characteristics  
(MBRF1060CT) (Per Leg)

Company reserves the right to improve product design , functions and reliability without notice.

REV: A

## Marking Code

Part Number	Marking code
MBRF1040CT-HF	MBRF1040CT
MBRF1060CT-HF	MBRF1060CT

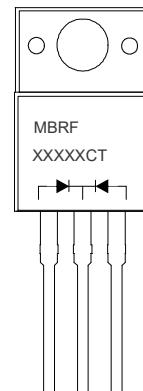

**XXXXX = Product type marking code**

## Standard Packaging

Case Type	TUBE PACK	
	TUBE ( pcs )	BOX ( pcs )
TO-220AB	50	2,000