

**Obsolete**



Micro Commercial Components

Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

# ZMY3.0G THRU ZMY75G

## Silicon 1.0 Watt Zener Diodes

### Features


- Silicon Power Zener Diodes
- 3.0thru 75 Volts Voltage Range
- For Surface Mount Application

### Mechanical Data

- Glass Case: MELF
- Mounting Position:Any

#### Maximum Ratings @ 25°C Unless Otherwise Specified

Power Dissipation	P <sub>tot</sub>	1.0	Watt
Thermal Resistance Junction to Ambient Air	R <sub>thJA</sub>	<170	K/W
Junction Temperature	T <sub>J</sub>	150°C	
Storage Temperature	T <sub>STG</sub>	-50°C to +150°C	

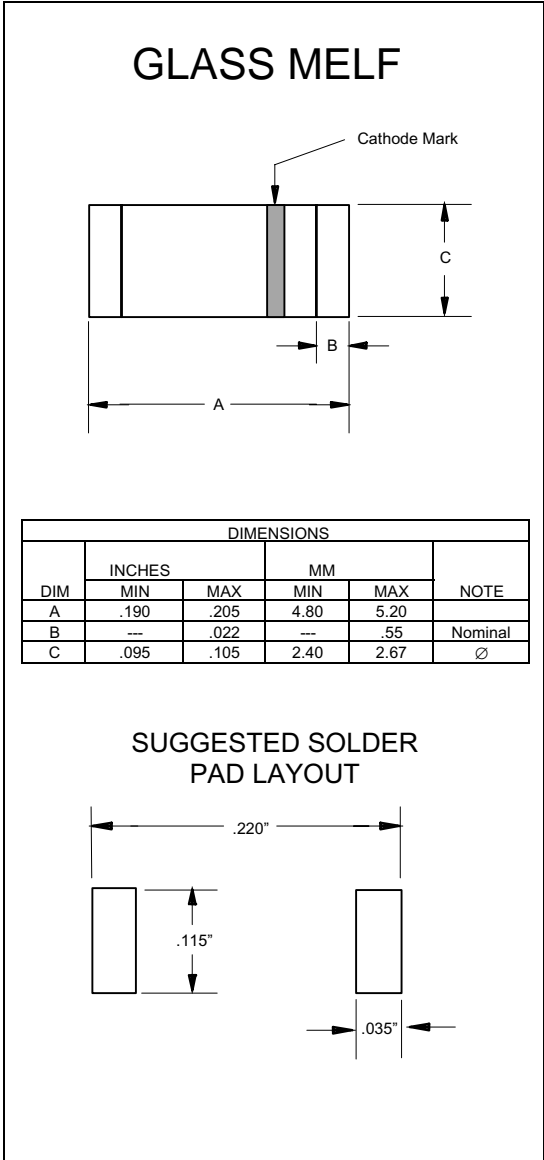

# ZMY3.0G thru ZMY75G

## ELECTRICAL CHARACTERISTICS (Ratings at 25°C ambient temperature unless otherwise specified.)

Type	Zener Voltage@Izt		Test Current Izt(mA)	Dynamic Resistance@Izt Ohm	Temp. Coefficient $\alpha_{Vz} (10^{-4}/^{\circ}\text{C})$	Reverse Volt @I <sub>r</sub> =1μA V <sub>r</sub> (V)	Max.Zener Current I <sub>z</sub> max(mA)
	V <sub>z</sub> min (V)	V <sub>z</sub> max(V)					
ZMY3.0G	2.8	3.2	100	5 (<8)	-8...+1	-	313
ZMY3.3G	3.1	3.5	100	5 (<8)	-8...+1	> 0.7 / 150 μA	286
ZMY3.6G	3.4	3.8	100	5 (<8)	-8...+1	> 0.7 / 100 μA	263
ZMY3.9G	3.7	4.1	100	4 (<7)	-7...+2	> 0.7 / 100 μA	244
ZMY4.3G	4	4.6	100	4 (<7)	-7...+3	> 0.7 / 50 μA	217
ZMY4.7G	4.4	5	100	4 (<7)	-7...+4	> 0.7 / 10 μA	200
ZMY5.1G	4.8	5.4	100	2 (<5)	-6...+5	> 0.7 / 10 μA	185
ZMY5.6G	5.2	6	100	1 (<2)	-3...+5	> 0.5 / 3 μA	167
ZMY6.2G	5.8	6.6	100	1 (<2)	-1...+6	> 1.5 / 500 nA	152
ZMY6.8G	6.4	7.2	100	1 (<2)	0...+7	> 2 / 500 nA	139
ZMY7.5G	7	7.9	100	1 (<2)	0...+7	> 3 / 500 nA	127
ZMY8.2G	7.7	8.7	100	1 (<2)	+3...+8	> 6 / 500 nA	115
ZMY9.1G	8.5	9.6	50	2 (<4)	+3...+8	> 7 / 500 nA	104
ZMY10G	9.4	10.6	50	2 (<4)	+5...+9	> 5	123
ZMY11G	10.4	11.6	50	4 (<7)	+5...+10	> 5	112
ZMY12G	11.4	12.7	50	4 (<7)	+5...+10	> 7	102
ZMY13G	12.4	14.1	50	5 (<10)	+5...+10	> 7	92
ZMY15G	13.8	15.6	50	5 (<10)	+5...+10	> 10	83
ZMY16G	15.3	17.1	25	6 (<15)	+6...+11	> 10	76
ZMY18G	16.8	19.1	25	6 (<15)	+6...+11	> 10	68
ZMY20G	18.8	21.2	25	6 (<15)	+6...+11	> 10	61
ZMY22G	20.8	23.3	25	6 (<15)	+6...+11	> 12	56
ZMY24G	22.8	25.6	25	7 (<15)	+6...+11	> 12	51
ZMY27G	25.1	28.9	25	7 (<15)	+6...+11	> 14	45
ZMY30G	28	32	25	8 (<15)	+6...+11	> 14	41
ZMY33G	31	35	25	8 (<15)	+6...+11	> 17	37
ZMY36G	34	38	10	16 (<40)	+6...+11	> 17	34
ZMY39G	37	41	10	20 (<40)	+6...+11	> 20	32
ZMY43G	40	46	10	24 (<45)	+7...+12	> 20	28
ZMY47G	44	50	10	24 (<45)	+7...+12	> 24	26
ZMY51G	48	54	10	25 (<60)	+7...+12	> 24	24
ZMY56G	52	60	10	25 (<60)	+7...+12	> 28	22
ZMY62G	58	66	10	25 (<80)	+8...+13	> 28	20
ZMY68G	64	72	10	25 (<80)	+8...+13	> 34	18
ZMY75G	70	79	10	30 (<100)	+8...+13	> 34	16



TM

Micro Commercial Components

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*APPLICATIONS DISCLAIMER\*\*\***

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.