

Unidirectional and Bidirectional Transient Voltage Suppressors

Reverse Voltage 6.8 - 600 Volts
Power Dissipation - 600 Watts

Features

- low leakage
- Uni and bidirectional uni
- Excellent clamping capability
- Fast response time

Mechanical Data

- Case: DO-15 molded plastic
- Polarity: Color band denotes cathode


Applications

- Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET.

DO-15



RoHS
COMPLIANT

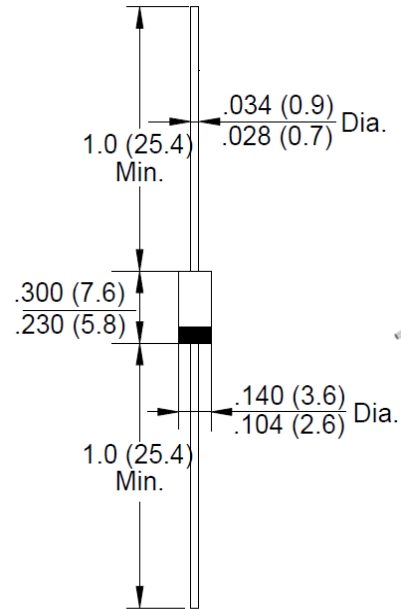

Package Outline Dimensions in Inches (Millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristics	Symbol	Value	Unit
Peak pulse power dissipation with a 10/1000µs waveform	PPPM	600	W
Peak pulse current with a waveform	IPPM	See Next Table	W
Maximum Instantaneous Forward Voltage at 50A for Unidirectional Devices Only (Note 3)	V _F	See Note 3	°C/W
Typical Thermal Resistance Junction to Lead	R _{θJL}	20	°C/W
Typical Thermal Resistance Junction to Ambient	R _{θJA}	75	°C/W
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave, Superimposed on Rated Load (JEDEC Method)	I _{FSM}	100	A
Power dissipation on infinite heat sink at T _L =75°C	P _D	5	W
Operating Junction Temperature Range	T _J	-55 to + 150	°C
Storage Temperature Range	T _{STG}	-55 to + 150	°C

Notes: 1. Non-repetitive current pulse, per Fig. 3 and derated above T_A=25°C per Fig. 1.

2. 8.3ms single half-wave duty cycle=4 pulses per minutes maximum (uni-directional units only).

3. V_F=3.5V on P6KE6.8G thru P6KE200AG devices and V_F=5.0V on P6KE220AG thru P6KE400AG devices.



Fig. 1 - Maximum Non-Repetitive Peak Forward Surge Current

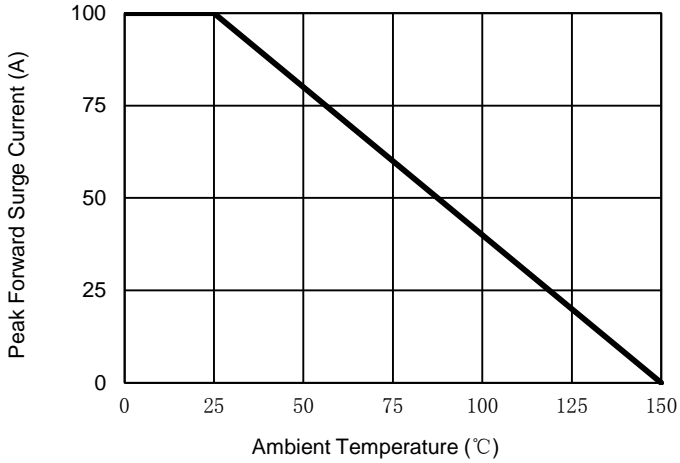


Fig. 2 - Maximum Non-Repetitive Surge Current

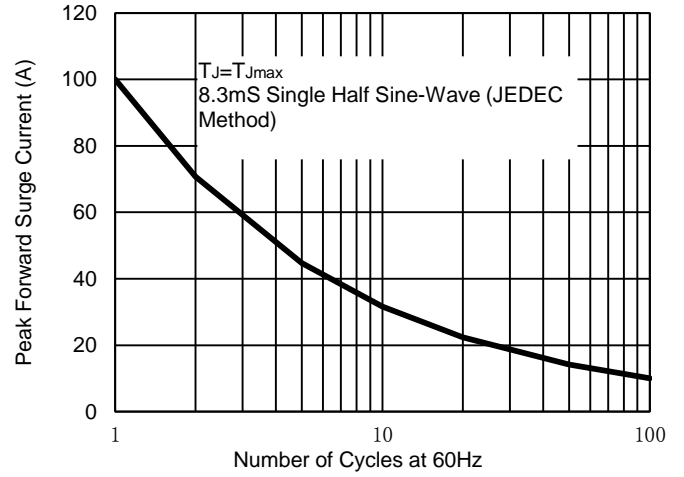


Fig. 3 - Pulse Waveform

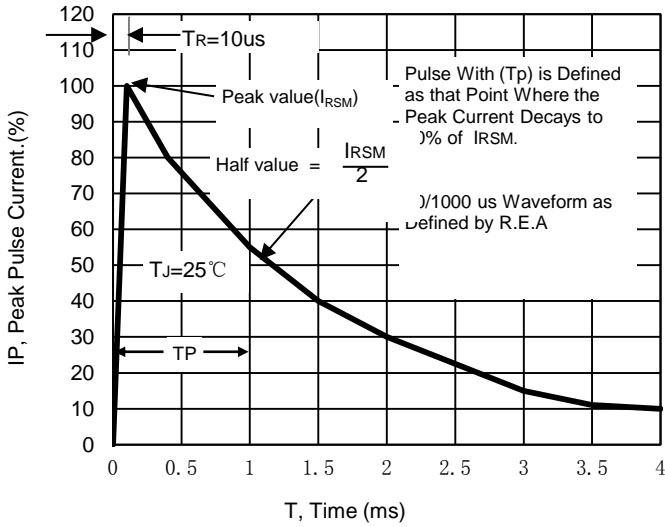


Fig. 4- Typical Junction Capacitance

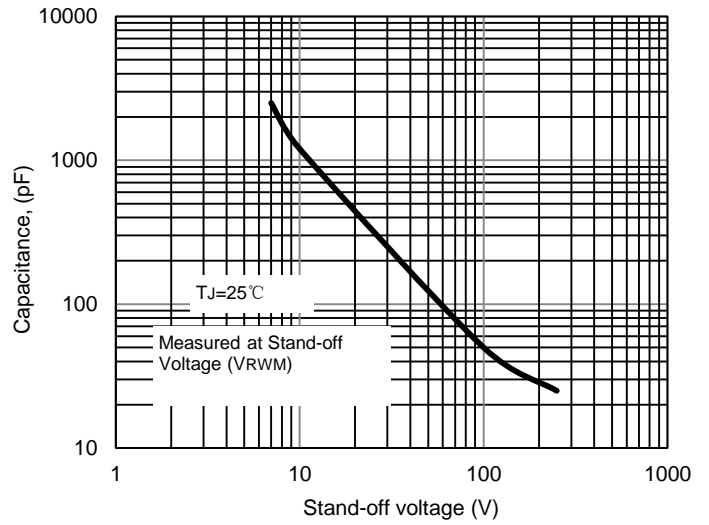


Fig. 5 - Pulse Rating Curve


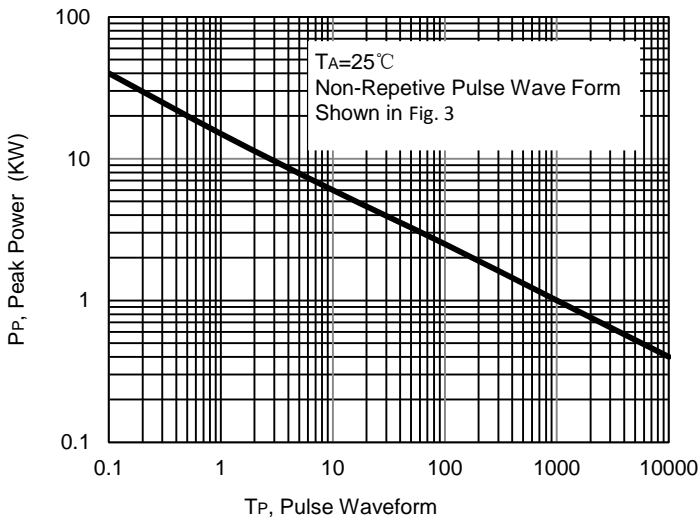


Fig. 6 - Steady State Power Derating Curve



The curve above is for reference only.

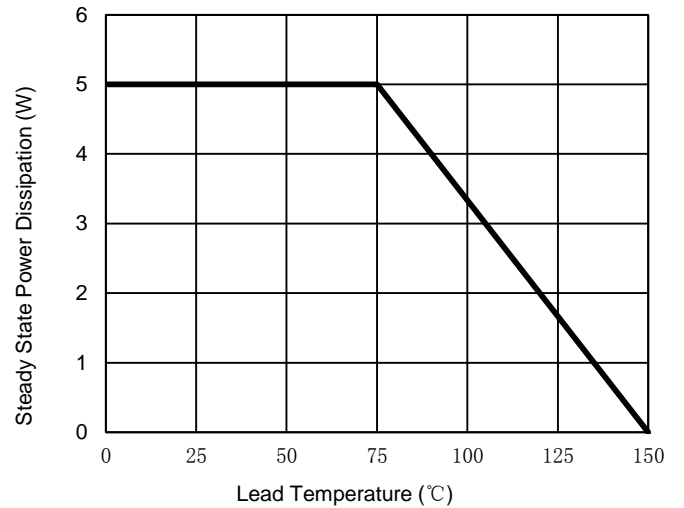

P6KEG SERIES

Device Uni-directional	Device Bi-directional	Reverse Stand off Voltage	Breakdown Voltage at IT2 V(BR) (V)			Maximum Reverse Leakage at VR	Maximum Clamping Voltage at IPPM	Maximum Peak Pulse Surge Current ⁽³⁾	Max. Voltage Temp.
			Min(V)	Max(V)	It(mA)				
(UNI)	(BI)	VR(V)	Min(V)	Max(V)	It(mA)	IR(μA)	Vc(V)	Ipp(A)	mV/°C
P6KEG6.8A	P6KEG6.8CA	5.80	6.45	7.14	10	1000	10.5	57.0	0.057
P6KEG7.5A	P6KEG7.5CA	6.40	7.13	7.88	10	500	11.3	53.0	0.061
P6KEG8.2A	P6KEG8.2CA	7.02	7.79	8.61	10	200	12.1	50.0	0.065
P6KEG9.1A	P6KEG9.1CA	7.78	8.65	9.55	1	50	13.4	45.0	0.068
P6KEG10A	P6KEG10CA	8.55	9.50	10.50	1	10	14.5	41.0	0.073
P6KEG11A	P6KEG11CA	9.40	10.50	11.60	1	5	15.6	38.0	0.075
P6KEG12A	P6KEG12CA	10.20	11.40	12.60	1	5	16.7	36.0	0.078
P6KEG13A	P6KEG13CA	11.10	12.40	13.70	1	5	18.2	33.0	0.081
P6KEG15A	P6KEG15CA	12.80	14.30	15.80	1	5	21.2	28.0	0.084
P6KEG16A	P6KEG16CA	13.60	15.20	16.80	1	5	22.5	27.0	0.086
P6KEG18A	P6KEG18CA	15.30	17.10	18.90	1	5	25.2	24.0	0.088
P6KEG20A	P6KEG20CA	17.10	19.00	21.00	1	5	27.7	22.0	0.090
P6KEG22A	P6KEG22CA	18.80	20.90	23.10	1	5	30.6	20.0	0.092
P6KEG24A	P6KEG24CA	20.50	22.80	25.20	1	5	33.2	18.0	0.094
P6KEG27A	P6KEG27CA	23.10	25.70	28.40	1	5	37.5	16.0	0.096
P6KEG30A	P6KEG30CA	25.60	28.50	31.50	1	5	41.4	14.4	0.097
P6KEG33A	P6KEG33CA	28.20	31.40	34.70	1	5	45.7	13.2	0.098
P6KEG36A	P6KEG36CA	30.80	34.20	37.80	1	5	49.9	12.0	0.099
P6KEG39A	P6KEG39CA	33.30	37.10	41.00	1	5	53.9	11.2	0.100
P6KEG43A	P6KEG43CA	36.80	40.90	45.20	1	5	59.3	10.1	0.101
P6KEG47A	P6KEG47CA	40.20	44.70	49.40	1	5	64.8	9.3	0.101
P6KEG51A	P6KEG51CA	43.60	48.50	53.60	1	5	70.1	8.6	0.102
P6KEG56A	P6KEG56CA	47.80	53.20	58.80	1	5	77.0	7.8	0.103
P6KEG62A	P6KEG62CA	53.0	58.9	65.1	1	5	85.0	7.10	0.104
P6KEG68A	P6KEG68CA	58.1	64.6	71.4	1	5	92.0	6.50	0.104
P6KEG75A	P6KEG75CA	64.7	71.3	78.8	1	5	103.0	5.80	0.105
P6KEG82A	P6KEG82CA	70.1	77.9	86.1	1	5	113.0	5.30	0.105
P6KEG91A	P6KEG91CA	77.8	86.5	95.5	1	5	125.0	4.80	0.106
P6KEG100A	P6KEG100CA	85.5	95.0	105.0	1	5	137.0	4.40	0.106
P6KEG110A	P6KEG110CA	94.0	105.0	116.0	1	5	152.0	4.00	0.107
P6KEG120A	P6KEG120CA	102.0	114.0	126.0	1	5	165.0	3.60	0.107
P6KEG130A	P6KEG130CA	111.0	124.0	137.0	1	5	179.0	3.30	0.107
P6KEG150A	P6KEG150CA	128.0	143.0	158.0	1	5	207.0	2.90	0.108
P6KEG160A	P6KEG160CA	136.0	152.0	168.0	1	5	219.0	2.70	0.108
P6KEG170A	P6KEG170CA	145.0	162.0	179.0	1	5	234.0	2.60	0.108
P6KEG180A	P6KEG180CA	154.0	171.0	189.0	1	5	246.0	2.40	0.108
P6KEG200A	P6KEG200CA	171.0	190.0	210.0	1	5	274.0	2.20	0.108
P6KEG220A	P6KEG220CA	185.0	209.0	231.0	1	5	328.0	1.83	0.108
P6KEG250A	P6KEG250CA	214.0	237.0	263.0	1	5	344.4	1.75	0.110
P6KEG300A	P6KEG300CA	256.0	285.0	315.0	1	5	414.0	1.45	0.110
P6KEG350A	P6KEG350CA	300.0	332.0	368.0	1	5	482.0	1.25	0.110
P6KEG400A	P6KEG400CA	342.0	380.0	420.0	1	5	548.0	1.10	0.110
P6KEG440A	P6KEG440CA	376	418	462	1	5	600	1.00	0.110
P6KEG480A	P6KEG480CA	408	456	504	1	5	658	0.90	0.110
P6KEG510A	P6KEG510CA	434	485	535	1	5	698	0.90	0.110
P6KEG530A	P6KEG530CA	477	503.5	556.5	1	5	725	0.80	0.110
P6KEG540A	P6KEG540CA	486	513	567	1	5	740	0.80	0.110
P6KEG550A	P6KEG550CA	495	522.5	577.5	1	5	760	0.80	0.110
P6KEG600A	P6KEG600CA	512	570	630	1	5	828	0.80	0.110

Notes: 1. Suffix 'C' denotes bidirectional device . Suffix 'A' denotes 5% tolerance device .

2. For bidirectional devices having VR of 10volts and under ,the IR limit is doubled .

P6KEG*-A-00-00

Rev. 9, 12-Apr-2019



Disclaimer

ALL specifications and data are subject to be changed without notice to improve reliability function or design or other reasons.

HY makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, HY disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on HY's knowledge of typical requirements that are often placed on HY products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify HY's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, HY products are not designed for use in medical, life-saving, or life-sustaining applications or for any other applications in which the failure of the HY product could result in personal injury or death. Customers using or selling HY products not expressly indicated for use in such applications do so at their own risk. Please contact authorized HY personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of HY. Product names and markings noted herein may be trademarks of their respective owners.

声明

所有的规格及数据如因改进可靠性、功能、设计或其他原因发生变更，恕不另行通知。

HY 对产品特定用途的适用性或任何产品的连续生产不做担保、陈述或保证。在可适用法律允许的最大程度上，HY 不承担 (i) 因应用或使用任何产品产生的任何及全部责任，(ii) 包括但不限于特定、连带或附带损害产生的任何及全部责任，(iii) 不做任何形式默认担保，包括不保证特定用途的使用性、非侵权及商业适销性。

关于产品适用于某类应用的声明以 HY 掌握的 HY 产品一般应用环境下的典型要求为准。此类声明与产品特定应用的适用性声明不存在任何关联。客户自行负责根据产品技术规格的说明认证特定产品是否适用于特定的应用。数据手册和技术规格中提供的参数可能因不同的应用而异，而且性能可能随时间而变化。所有工作参数，包括电型参数，必须有客户的技术专家根据每一个客户应用环境确认。产品技术规格不扩展或不以其他方式修改 HY 的采购条款与条件或不以其他方式修改 HY 的采购条款与条件，包括但不限于规定的质保条件。

除非书面注明，否则 HY 产品不用于医疗、救护或生命维护，或其他因 HY 产品发生故障有可能导致人身伤亡的应用场合。客户使用或销售未明确指示可在上诉应用中使用的 HY 产品风险自负。如欲获得有关指定用于上诉应用的产品的书面条款及条件，请与 HY 授权人员联系。

本档或任何 HY 的行为不以禁止反言或其他方式授予任何知识产权的许可，无论显示还是暗示。本文提到的产品名称和标识可能为各自所有者的商标。