

规格书编号

SPEC NO: HDF2140ES6SP00

产品规格书

SPECIFICATION

CUSTOMER 客户: _____

PRODUCT 产品: _____ SAW FILTER _____

MODEL NO 型号: _____ HDF2140E-S6 _____

MARKING 印字: _____ TBD _____


PREPARED 编制: _____ CHECKED 审核: _____

APPROVED 批准: _____ D A T E 日期: _____ 2013-12-13 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

1. Package Dimension

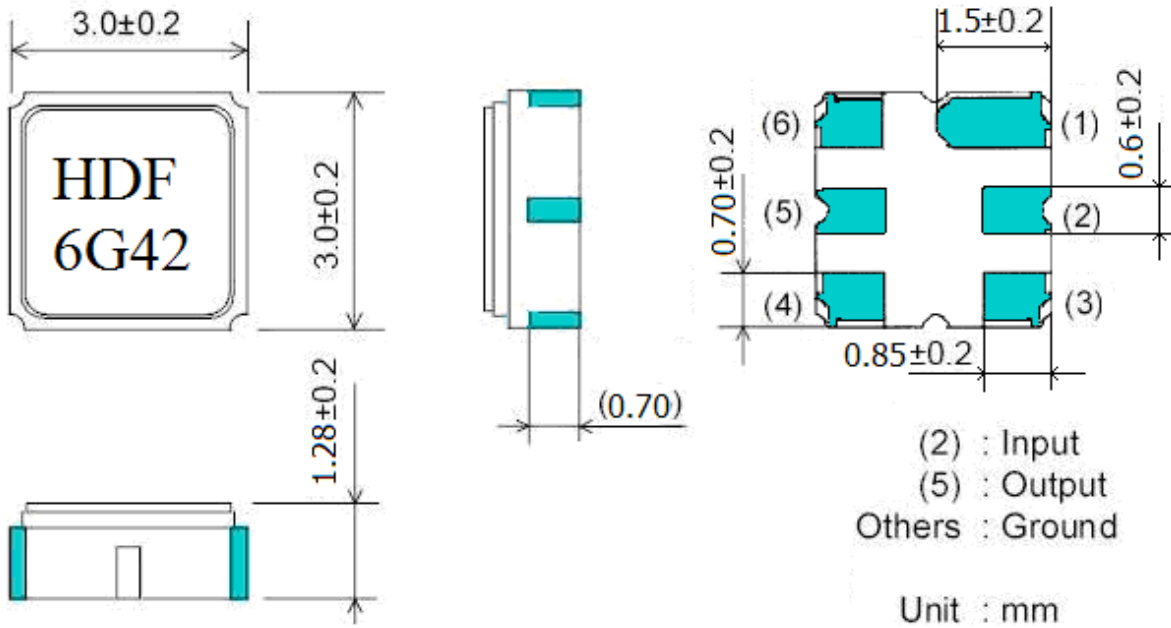


2. Performance

2.1 Maximum Rating

Items	Rating	unit
Maximum Working Voltage	10	V _{dc}
Maximum Working Power	10	dBm
Operating Temperature Range	-40 ~ +85	°C
Storage Temperature Range	-40 ~ +85	°C

2.2 Electronic Characteristics

	Unit	Minimum	Typical	Maximum
Center Frequency Fc	MHz	-	2140	-
Insertion Loss (In 2110~2170 MHz)	dB		3.3	4.0
Amplitude Ripple (In 2110~2170 MHz)	dB		1.2	2.0
VSWR(In 2110~2170 MHz)				
Absolute Attenuation				
DC~500 MHz	dB	25	37	-
500~2025 MHz		20	37	
2025~2050 MHz		27	35	
2230~2260 MHz		40	44	
2490~2550 MHz		31	40	
Input/Output Impedance	Ohms		50	

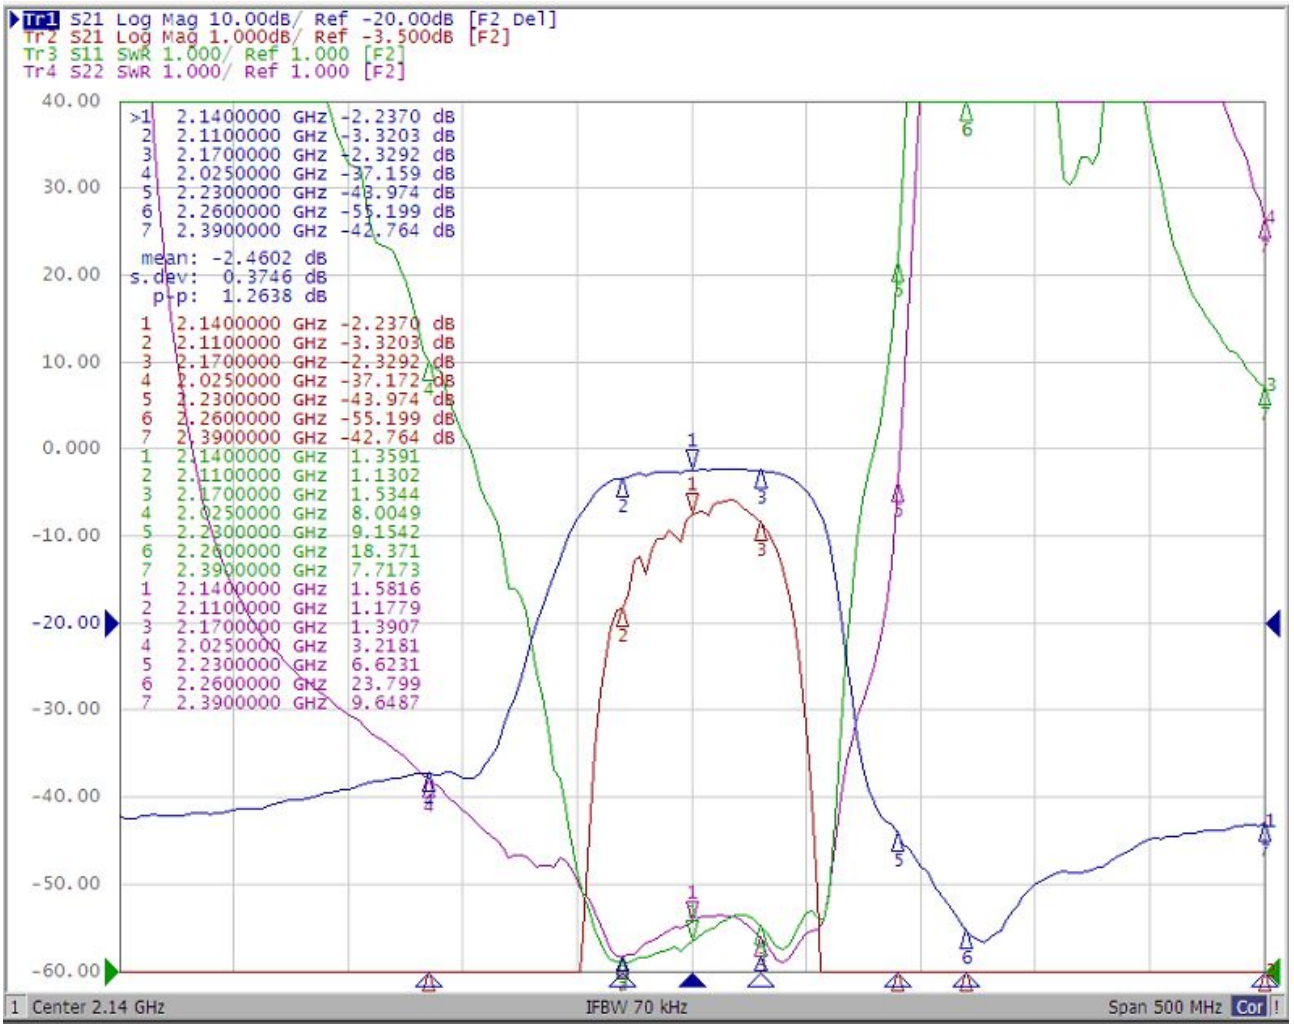

3. Test Circuit

