


Aug.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

【 Assemble tool 】 For outer conductor crimping : HT303/P0-P-2-T

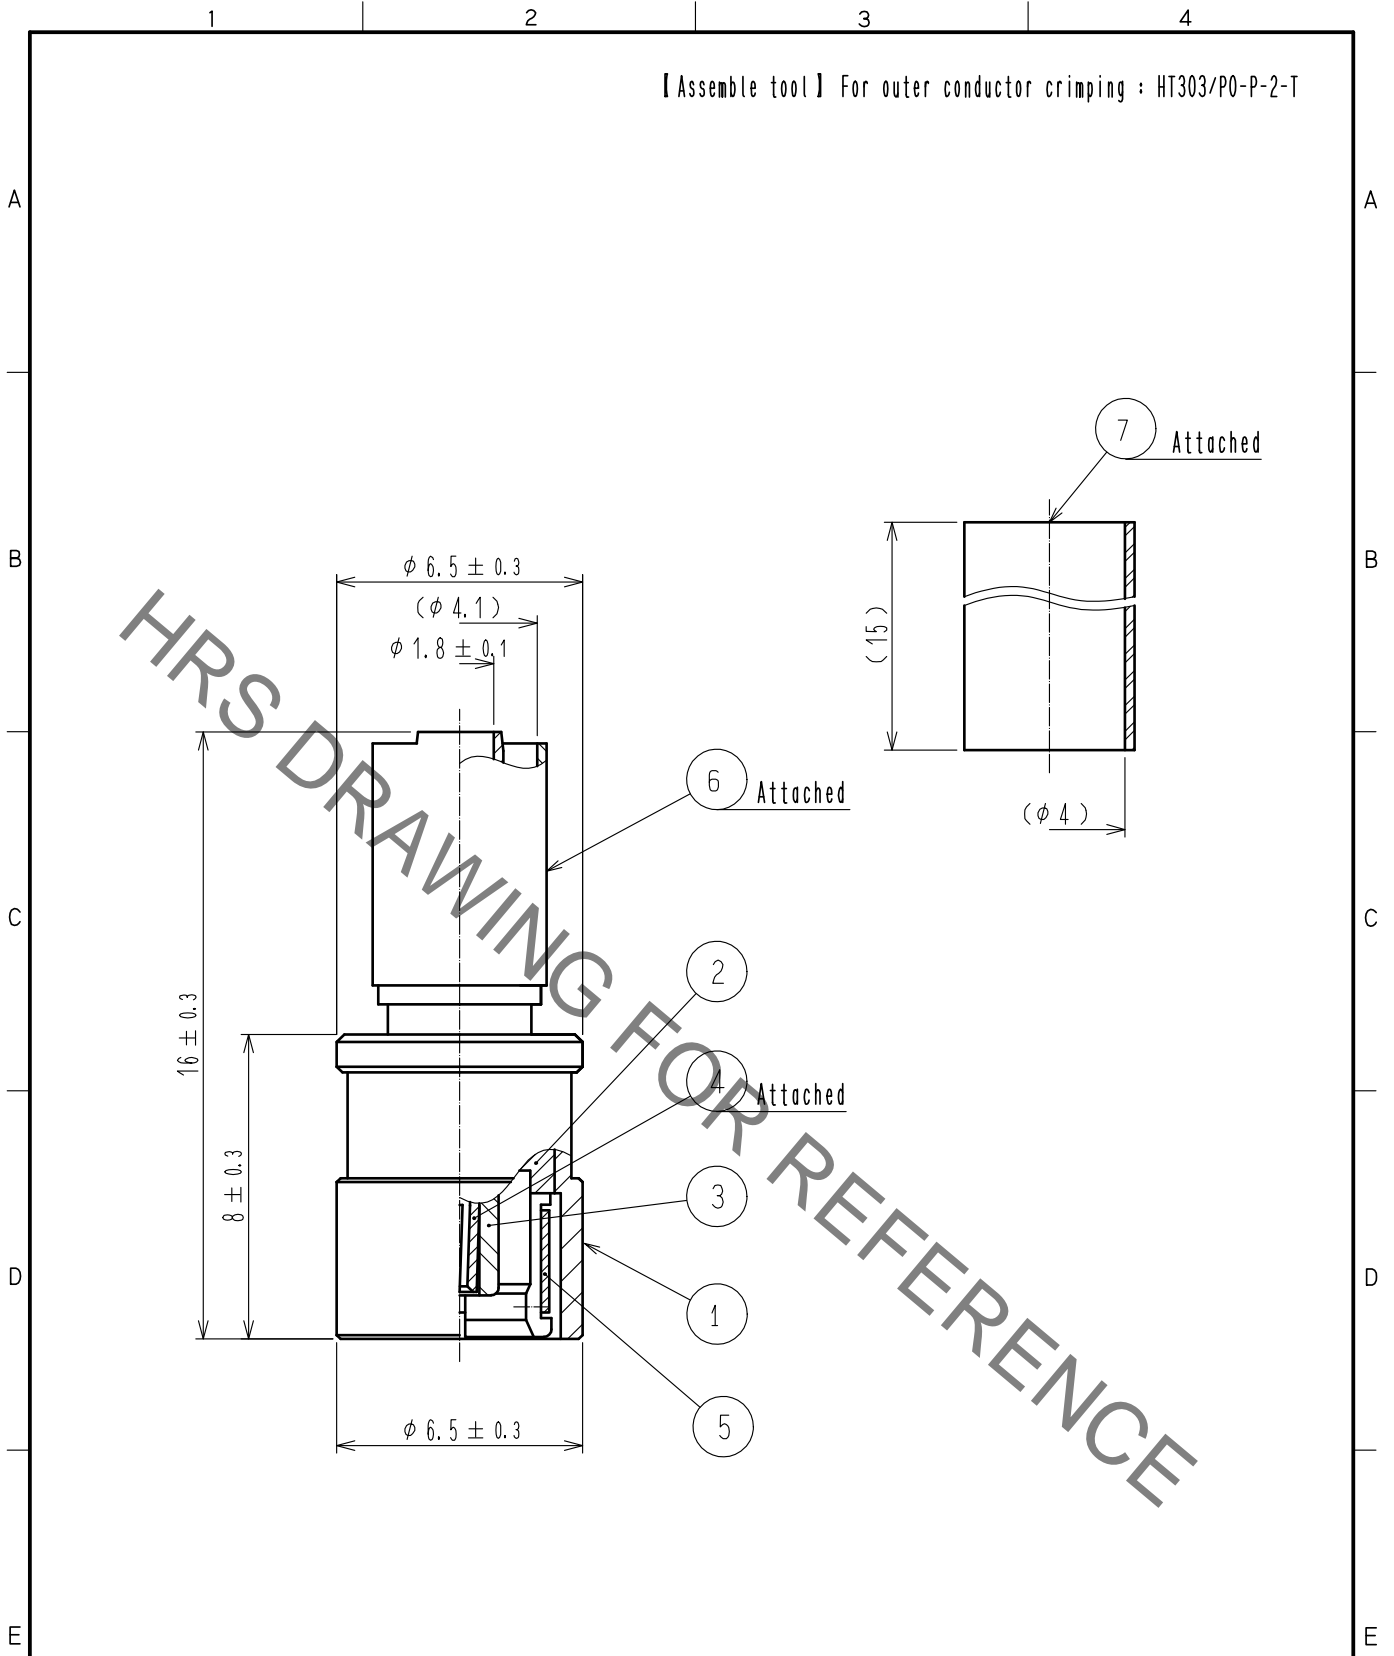

4	Beryllium copper	Gold plating					
3	PTFE		7	Polyolefin	Heat shrink tubing(Black)		
2	Brass	Nickel plating	6	Copper	Nickel plating		
1	Brass	Nickel plating	5	Beryllium copper	Nickel plating		
NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS

UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : TO. KATAYAMA	20201005	DRAWING NO.	EDC-315660-00-00		
		CHECKED : TO. KATAYAMA	20201005	PART NO.	N. UM-QP-1.5W		
		DESIGNED : MK. INOUE	20201005	CODE NO.	CL336-0034-7-00	1/1	
		DRAWN : MK. INOUE	20201005				