

1. Taping specification

Taping Specification	Packaging classification		Taping classification		Packaged quantity(PCS)
	Reel	Ammo pack	Forward direction	Reverse direction	TO-92L
AT		•	•		2,000


AT : Taping of ammo pack type

2. Taping dimension


Unit : mm

Item	Symbol	Value & Tolerance
Body width	A1	4.9 ± 0.2
Body height	A	8 ± 0.2
Body thickness	T	3.9 ± 0.2
Lead wire diameter	d	0.5 ± 0.05
Pitch of component	P	12.7 ± 1.0
Feed hole pitch	PO	12.7 ± 0.2
Hole center to component center	P2	6.35 ± 0.5
Lead to lead distance	F1,F2	2.5 + 0.3/-0.1
Component alignment	Δh	0 ± 1.0
Tape width	W	18.0 + 1.0/-0.5
Hole-down tape width	WO	6.0 ± 0.5
Hole position	W1	9.0 + 1.0/-0.5
Hole down Tape position	W2	1.0 (Max.)
Height of component from tape center	H	19.0 (Min.)
Lead wire clinch height	HO	16.0 + 1.0/-0.5
Component height	H1	32.3 (Max.)
Lead wire(tape portion)	L1	2.5 (Min.)
Feed hole diameter	DO	4.0 ± 0.2
Total tape thickness	t	0.7 ± 0.2

3. Taping direction

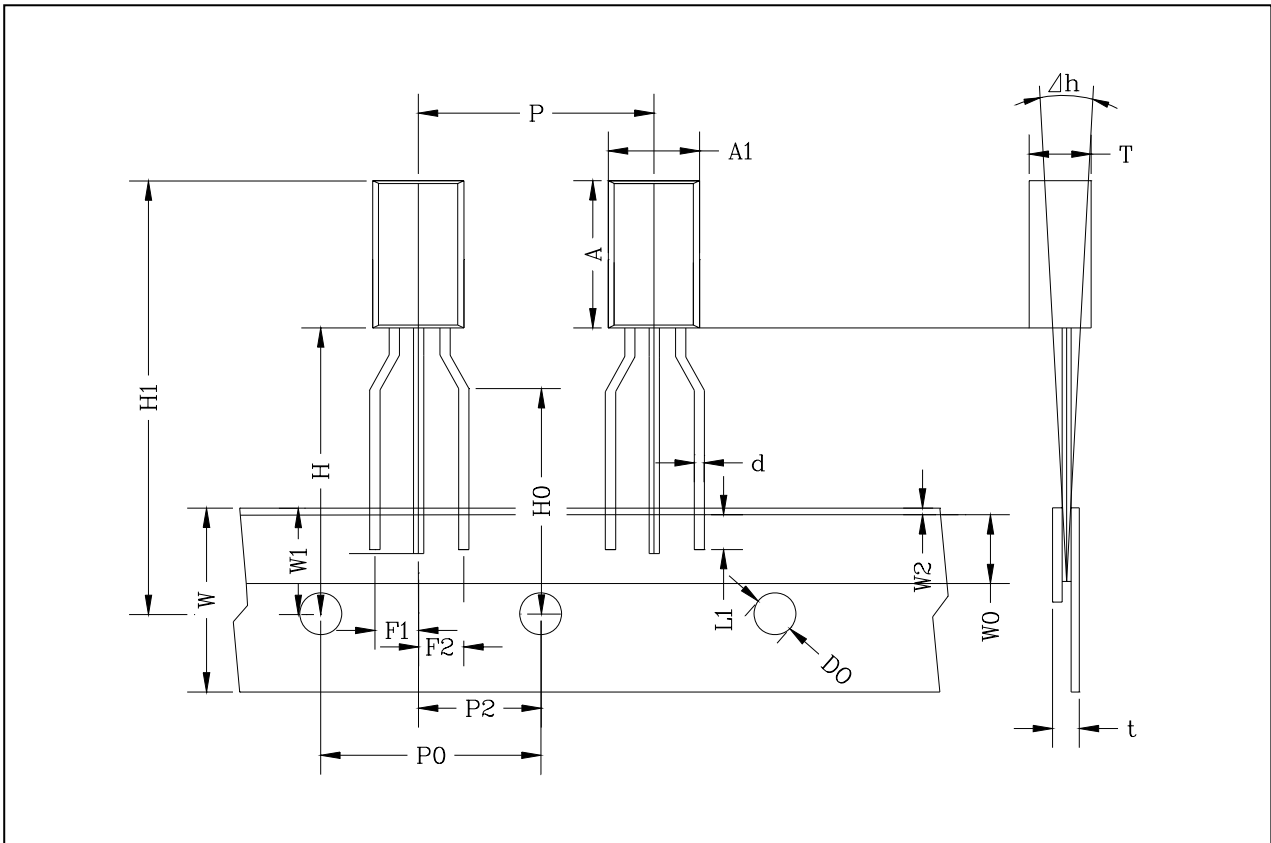


4. Packing method

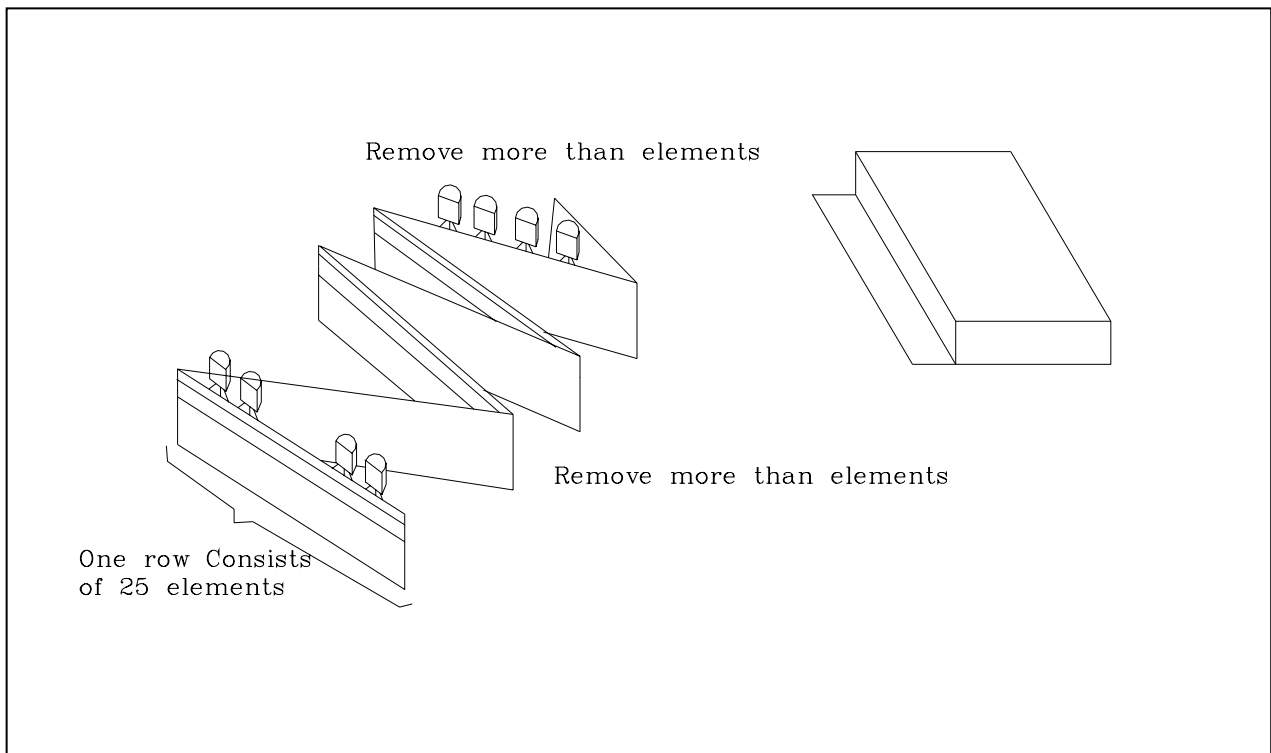

5. Box dimension

Unit : [mm]


Inner Box

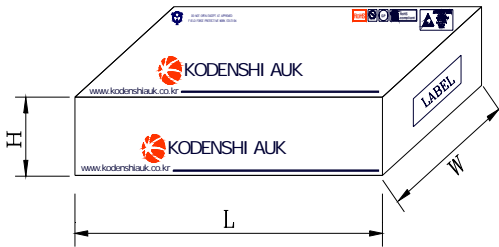

(1) Dimension : 340(L)×175(W)×48(H) (mm)

(2) Quantity : 2Kp per each Inner Box

Out Box

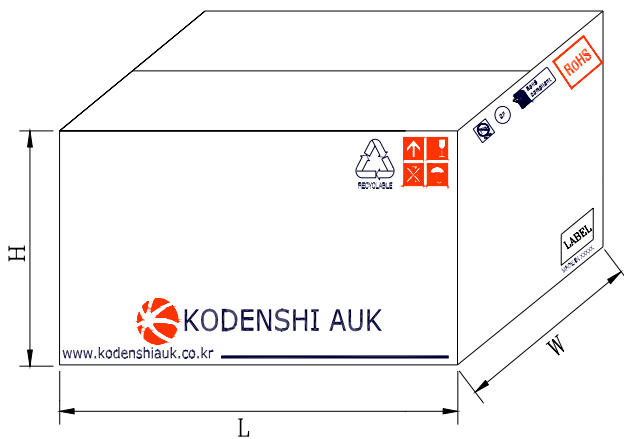

(1) Dimension : 565(L)×350(W)×265(H) (mm)

(2) Quantity : contain 15ea Inner Box (Total 30Kpcs)