


# 1 Amp Schottky Rectifier

## MSP140 — MSP150

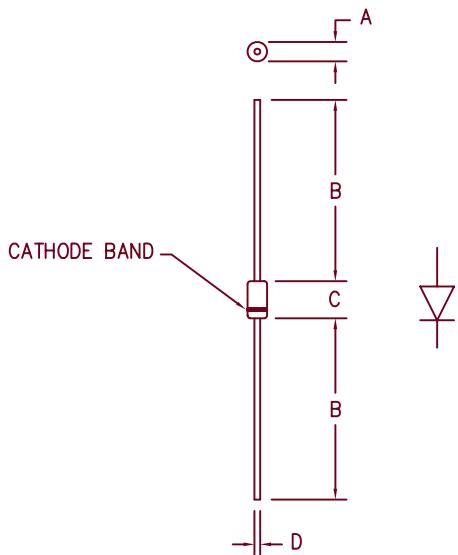

	Dim. Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.081	.107	2.057	2.718	Dia.
B	1.10	---	27.94	---	
C	.160	.205	4.064	5.207	
D	.028	.034	.711	.864	Dia.

PLASTIC D041

Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
	$V_{RWM}$	$V_{RRM}$
MSP140	40V	40V
MSP145	45V	45V
MSP150	50V	50V

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Forward Voltage
- 150°C Junction Temperature
- $V_{RRM}$  40 to 50 Volts

### Electrical Characteristics

Average forward current	$I_F(AV)$ 1.0 Amps	$T_A = 120^\circ\text{C}$ Square wave, $R_{\theta JL} = 35^\circ\text{C}/W$ , $L = 0$
Maximum surge current	$I_{FSM}$ 50 Amps	8.3 ms, half sine, $T_J = 150^\circ\text{C}$
Max peak forward voltage	$V_{FM}$ .58 Volts	$I_{FM} = 1.0A$ : $T_J = 25^\circ\text{C}^*$
Max peak reverse current	$I_{RM}$ 100 $\mu\text{A}$	$V_{RRM}, T_J = 25^\circ\text{C}$
Typical junction capacitance	$C_J$ 60pF	$V_R = 5.0V, T_J = 25^\circ\text{C}$


\*Pulse test: Pulse width 300  $\mu\text{sec}$ , Duty cycle 2%

### Thermal and Mechanical Characteristics


Storage temperature range	$T_{STG}$	-55°C to + 175°C
Operating junction temp range	$T_J$	-55°C to + 150°C
Maximum thermal resistance $L = 1/4"$	$R_{\theta JL}$	15°C/W Junction to Lead
Weight		0.38 grams typical

# MSP140 — MSP150

**Figure 1**  
Maximum Forward Characteristics

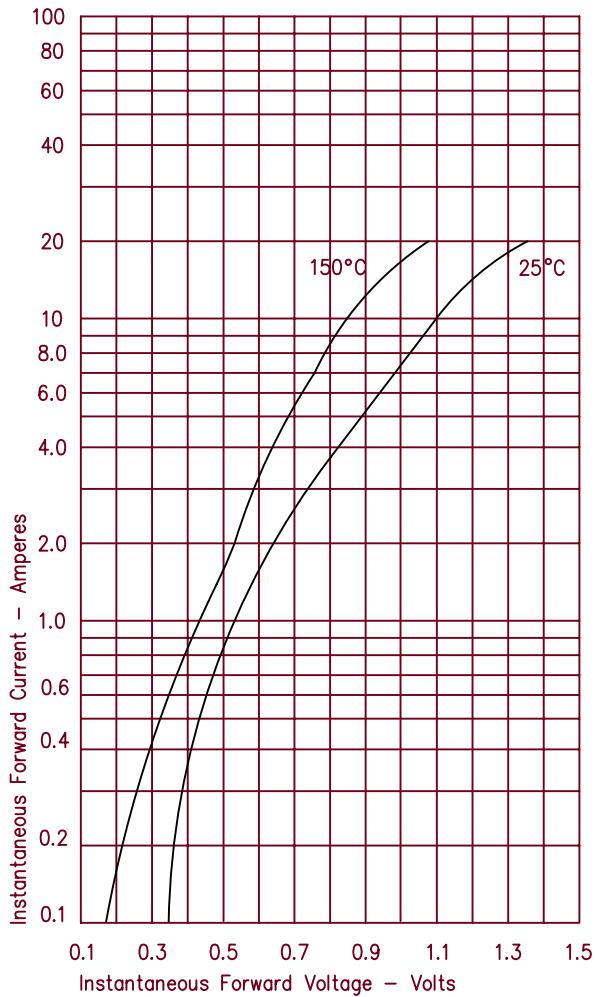

**Figure 3**  
Typical Junction Capacitance

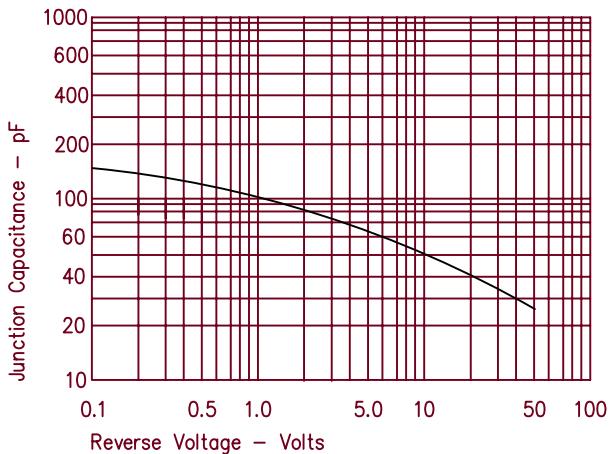

**Figure 2**  
Typical Reverse Characteristics

