

## Features

- Low forward voltage drop
- Low leakage current
- Moisture sensitivity: level 1, per J-STD-020
- Solder dip 260 °C, 10 s
- Low profile, typical thickness 1.0mm



Package: eSGB(SMAF)

## Applications

For use in fast switching in RF module, lighting, cell phone, portable devices, power supply and other consumer applications.

## Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	LS2BH	LS2B5H	LS2CH	Unit
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	150	200	V
Maximum RMS Voltage	$V_{RMS}$	70	105	140	V
Maximum DC Blocking Voltage	$V_{DC}$	100	150	200	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$		2.0		A
Peak Forward Surge Current (8.3 ms single half sine-wave superimposed on rated load)	$I_{FSM}$		50		A
Operating Junction Temperature Range	$T_J$		- 55 to + 150		°C
Storage Temperature Range	$T_{STG}$		- 55 to + 150		°C

## Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Test Conditions	Symbol	Value	Unit
Instantaneous Forward Voltage	2 A	$V_F$	0.85	V
Reverse Current at Rated DC Blocking Voltage	$T_A=25^\circ\text{C}$	$I_R$	0.2	mA
	$T_A=125^\circ\text{C}$		30	
Junction Capacitance	4.0 V, 1 MHz	$C_J$	400	pF
Typical Thermal Resistance	Junction to Lead	$R_{\theta JM}$	20	°C/W

## Ratings and Characteristics Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

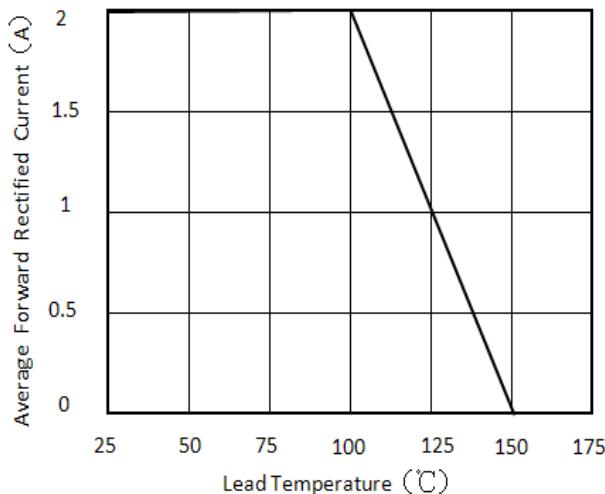


Figure 1. Forward Current Derating Curve

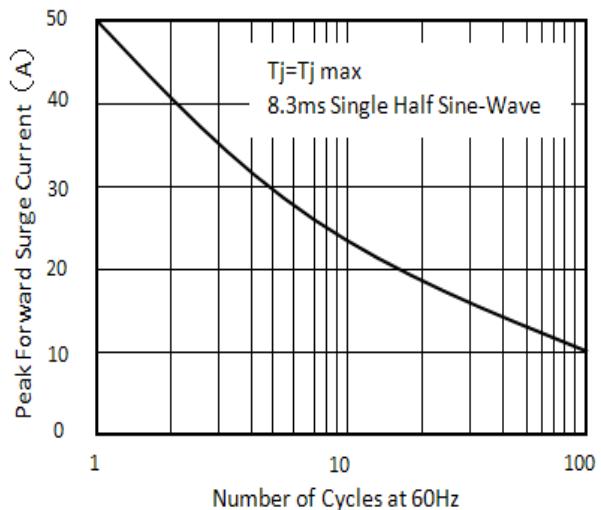


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

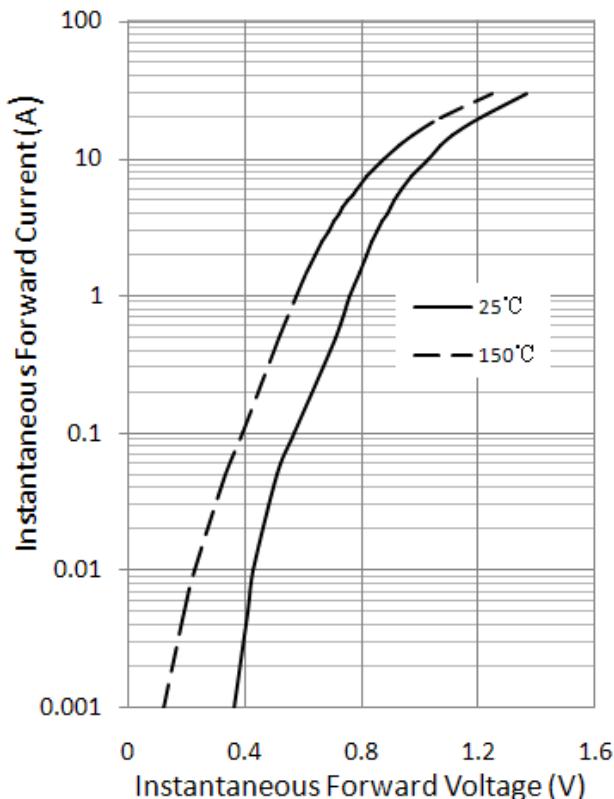


Figure 3. Typical Instantaneous Forward Characteristics


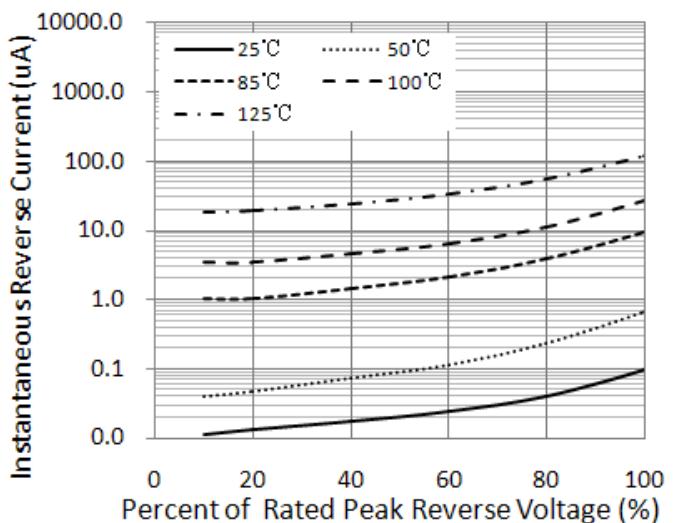


Figure 4. Typical Reverse Characteristics


## Package Outline Dimensions

eSGB (SMAF)

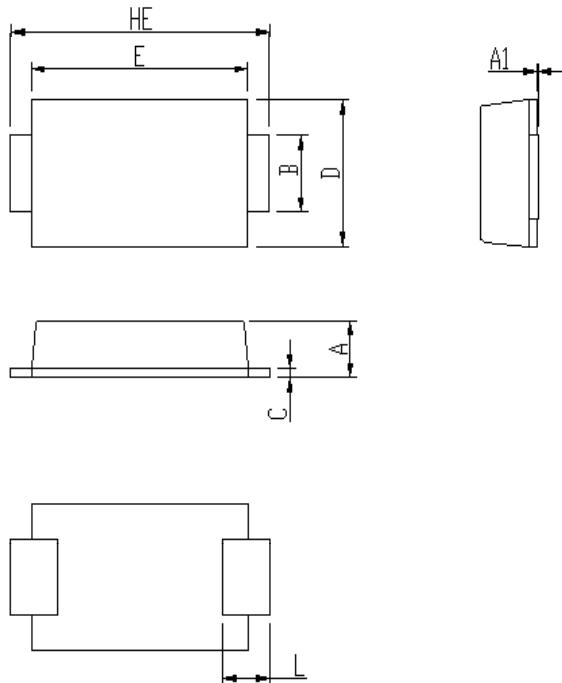

DIM	Unit: mm		Unit: inch	
	MIN	MAX	MIN	MAX
A	0.92	1.08	0.036	0.043
A1	0	0.1	0.000	0.004
B	1.25	1.45	0.049	0.057
C	0.1	0.25	0.004	0.010
D	2.6	2.8	0.102	0.110
E	4.1	4.3	0.161	0.169
L	0.8	1.0	0.031	0.039
HE	4.8	5.2	0.189	0.205

Soldering footprint

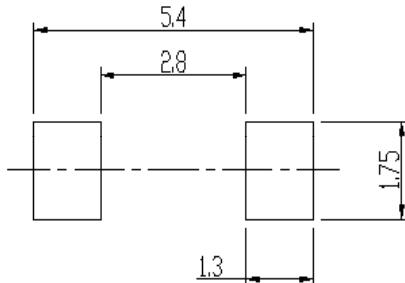

## Packing Information

Reel size	Quantity/Reel	Quantity/Inner Box	Quantity/Carton
7"	3K	21K	84K
13"	10K	20K	180K

## Reel Tape & Reel Specification

