


Feature

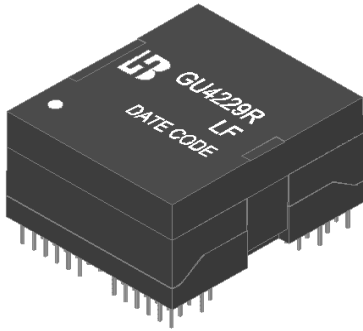

- Complying with IEEE 802.3ab standard for 1000 BASE-T , full quad port applications.
- Supports 16 pairs of category 5 UTP cable.
- Cable interface for isolation and low common mode emissions.
- Complying with ROHS requirements.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +85°C.

Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)		OCL (uH Min) @100KHz/0.1V with 8mA DC Bias	L.L (uH Max)	C _{www} (pF Max)	DCR (Ω Max)	HI-POT
	TX	RX					
GU4229R LF	1CT:1CT	1CT:1CT	350	0.5	28	0.9	AC1500V/1mA


Continue

Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)@ Load 100Ω				
		1-100MHz	1-30MHz	40MHz	50MHz	60-80MHz
GU4229R LF	-1.0	-18	-16	-14.08	-12.5	-10


Continue

Part Number	Cross talk (dB Min)			DCMR (dB Min)		
	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz
GU4229R LF	-40	-35	-30	-40	-35	-30

Schematic

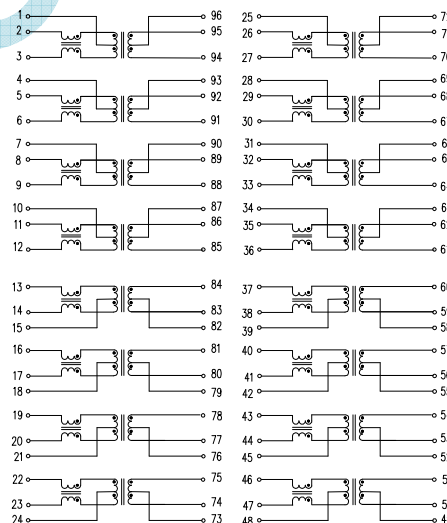


Mechanical

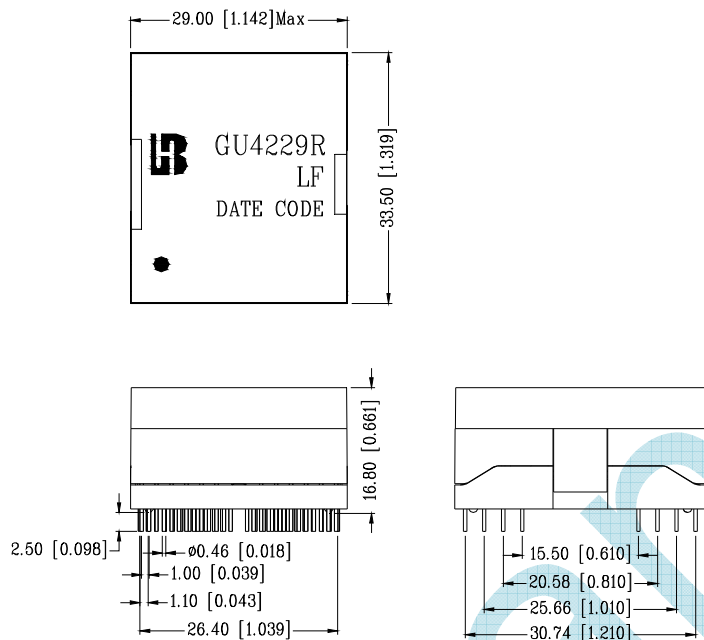


Units: mm [Inches] Tolerance: xx.xx±0.25 [0.010]
 0.xx±0.05 [0.002]

PCB Layout mounting Hole (Top View)

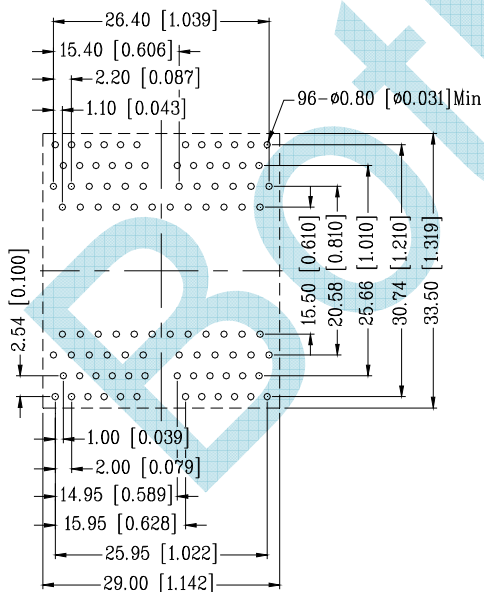


Unless otherwise specified,
 all dimension tolerance are: ±0.08 [±0.003]

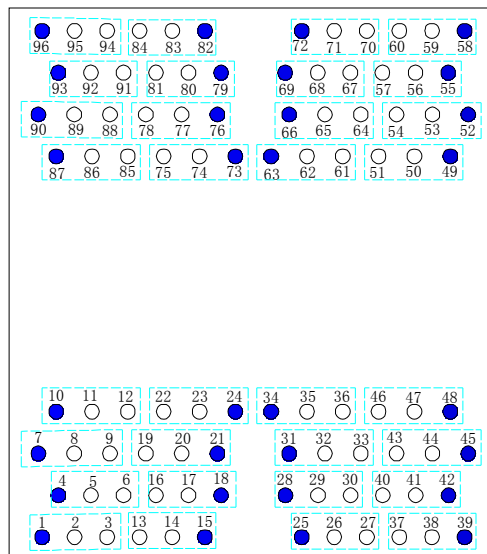


Blue : Center Tap


TUBE PACKAGE



TUBE



INNER BOX:567x135x125

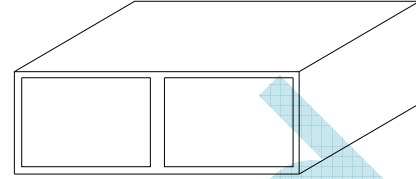

OUTER CARTON:598x287x158

1. 1 TUBE=17PCS
2. 1 INNER BOX=12 TUBES=204PCS
3. 1 OUTER CARTON=2 INNER BOXES=408PCS

Bothhand