


# LS4148

## Silicon Epitaxial Planar Switching Diode

Fast switching diode in QuadroMELF case  
especially suited for automatic surface mounting.  
Identical electrically to standard JEDEC 1N4148

LS-34

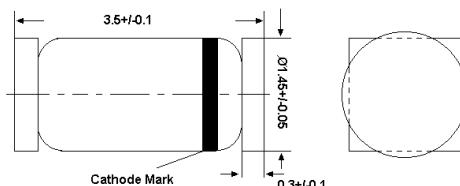


QuadroMELF  
Dimensions in mm

### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	$V_{RM}$	100	V
Reverse Voltage	$V_R$	75	V
Average Rectified Forward Current	$I_{F(AV)}$	200	mA
Forward Current	$I_F$	300	mA
Repetitive Peak Forward Current	$I_{FRM}$	500	mA
Non-repetitive Peak Forward Surge Current at $t = 1 \text{ s}$ at $t = 1 \text{ ms}$ at $t = 1 \mu\text{s}$	$I_{FSM}$	0.5 1 4	A
Power Dissipation	$P_{tot}$	500 <sup>1)</sup>	mW
Junction Temperature	$T_j$	175	°C
Storage Temperature Range	$T_{stg}$	- 65 to + 175	°C

<sup>1)</sup> Valid provided that electrodes are kept at ambient temperature.




**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited




## Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage tested with 100 $\mu\text{A}$ Pulses	$V_{(\text{BR})R}$	100	-	V
Forward Voltage at $I_F = 10 \text{ mA}$	$V_F$	-	1	V
Reverse Leakage Current at $V_R = 20 \text{ V}$ at $V_R = 75 \text{ V}$ at $V_R = 20 \text{ V}, T_j = 150^\circ\text{C}$	$I_R$ $I_R$ $I_R$	- - -	25 5 50	nA $\mu\text{A}$ $\mu\text{A}$
Capacitance at $V_R = 0, f = 1 \text{ MHz}$	$C_{\text{tot}}$	-	4	pF
Voltage Rise when Switching ON tested with 50mA Forward Pulses $t_p = 0.1 \text{ s}$ , Rise Time < 30 ns, $f_p = 5 \text{ to } 100 \text{ KHz}$	$V_{\text{fr}}$	-	2.5	V
Reverse Recovery Time at $I_F = 10 \text{ mA}$ to $I_R = 1 \text{ mA}$ , $I_{\text{rr}} = 0.1 \times I_R, V_R = 6 \text{ V}$ , $R_L = 100 \Omega$	$t_{\text{rr}}$	-	4	ns
Thermal Resistance Junction to Ambient Air	$R_{\text{thA}}$	-	0.35 <sup>1)</sup>	K/mW
Rectification Efficiency at $f = 100 \text{ MHz}, V_{RF} = 2 \text{ V}$	$\eta_V$	0.45	-	-

<sup>1)</sup> Valid provided that electrodes are kept at ambient temperature.

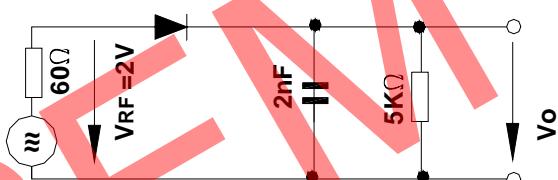

Rectification Efficiency Measurement Circuit



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited



ISO/TS 16949 : 2009  
Certificate No. B3723402



ISO14001 : 2004  
Certificate No. 7116







ISO 9001 : 2008  
Certificate No. 600000



BS-EN9106-1:2007  
Certificate No. 7116



IECQ QC 080000  
Certificate No. RAK-A994-A04

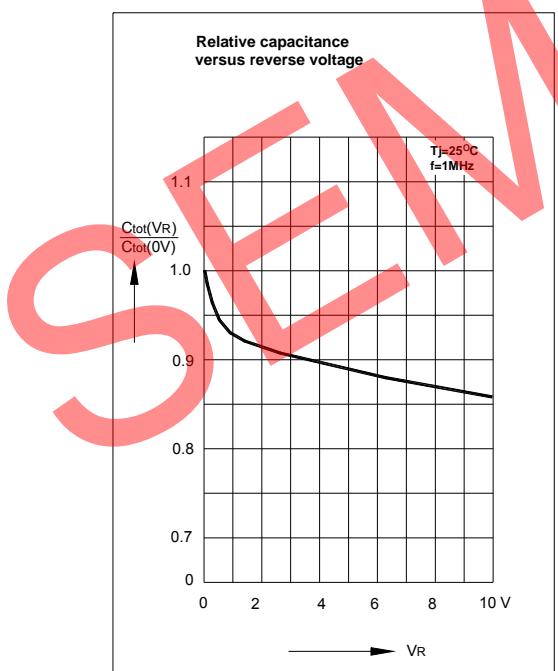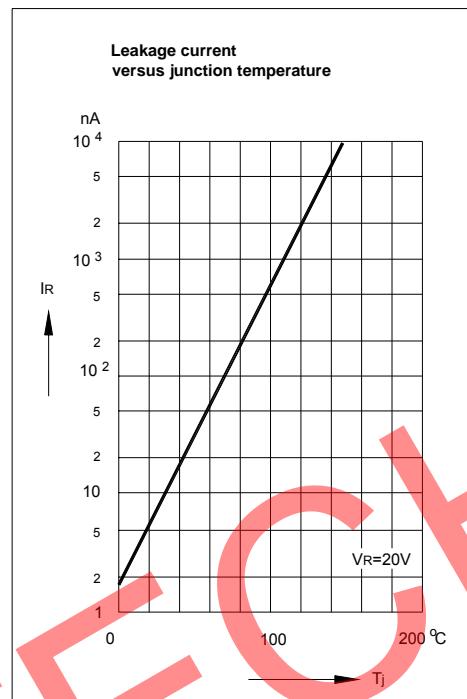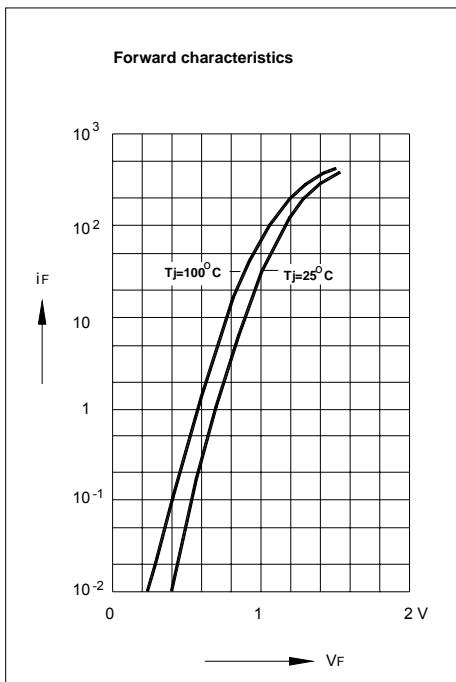

**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited

