



MBRX120 THRU MBRX160



Reverse Voltage 20-40 Volts Forward Current - 1.0 Ampere

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Features

- ◆ Fast switching speed
- ◆ Surface mount package ideally suited
- ◆ for automatic insertion
- ◆ For general purpose switching applications High
- ◆ conductance

SOD-123

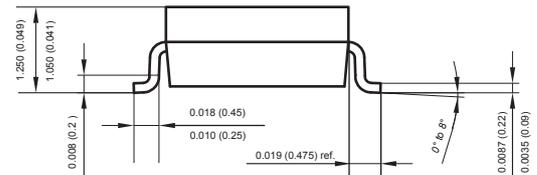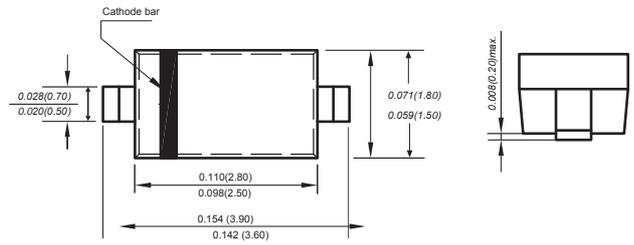

Mechanical Data

Case: JEDEC SOD-123 molded plastic body
 Terminals: Plated leads solderable per MIL-STD-750, Method 2026
 Polarity: Polarity symbols marked on case
 Weight : 0.0007 ounce, 0.02 grams
 Marking: MBRX120:X2, MBRX130:X3
 MBRX140:X4, MBRX160:X6

Dimensions in inches and (millimeters)

Absolute Maximum Ratings at 25 °C

| MDD Catalog Number | SYMBOLS | MBRX120 | MBRX130 | MBRX140 | MBRX160 | UNITS |
|---|------------|-------------|---------|---------|---------|-------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 20 | 30 | 40 | 60 | VOLTS |
| Maximum RMS voltage | V_{RMS} | 14 | 21 | 28 | 42 | VOLTS |
| Maximum DC blocking voltage | V_{DC} | 20 | 30 | 40 | 60 | VOLTS |
| Maximum average forward rectified current at $T_L=90^{\circ}C$ | $I_{(AV)}$ | 1.0 | | | | Amps |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I_{FSM} | 20.0 | | | | Amps |
| Maximum instantaneous forward voltage at 1.0A | V_F | 0.5 | 0.55 | | 0.72 | Volts |
| Maximum DC reverse current $T_J=25^{\circ}C$ at rated DC blocking voltage | I_R | 0.3 | | | | mA |
| Typical junction capacitance (NOTE 1) | C_J | 30 | | | | pF |
| Operating junction temperature range | T_J | -55 to +150 | | | | $^{\circ}C$ |
| Storage temperature range | T_{STG} | -50 to +150 | | | | $^{\circ}C$ |

Note: 1.. High Temperature Solder Exemption Applied, see EU Directive Annex 7



MBRX120 THRU MBRX160

Reverse Voltage 20-40 Volts Forward Current - 1.0 Ampere

Typical Characteristics

Figure 1
Typical Forward Characteristics


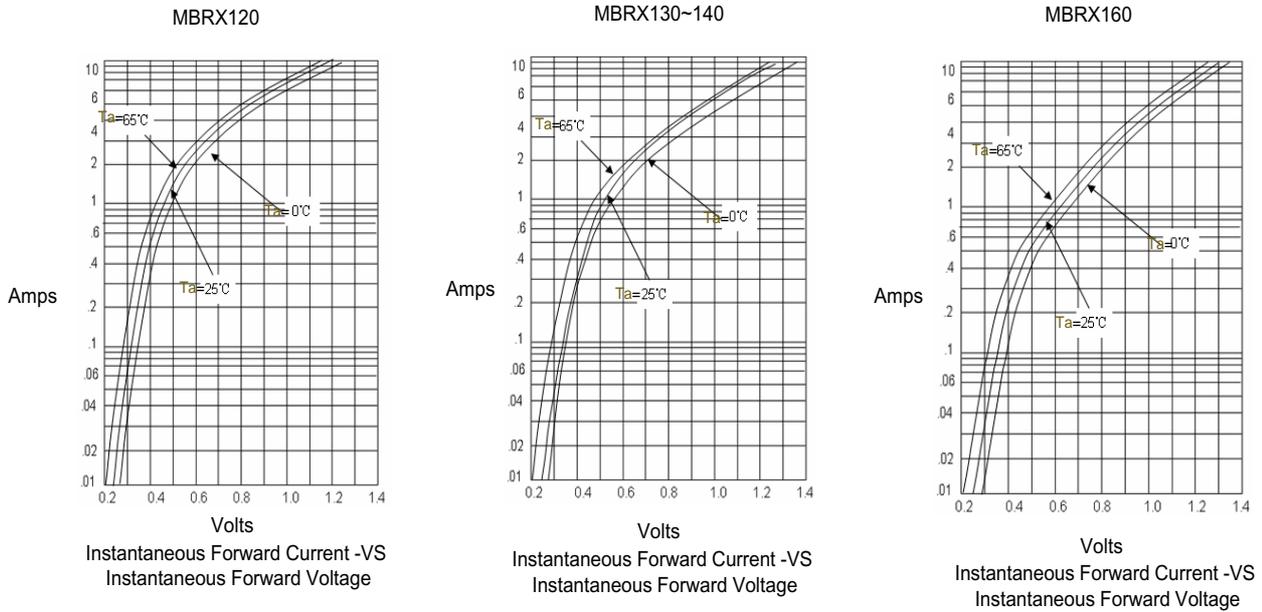


Figure 2
Junction Capacitance




The curve above is for reference only.

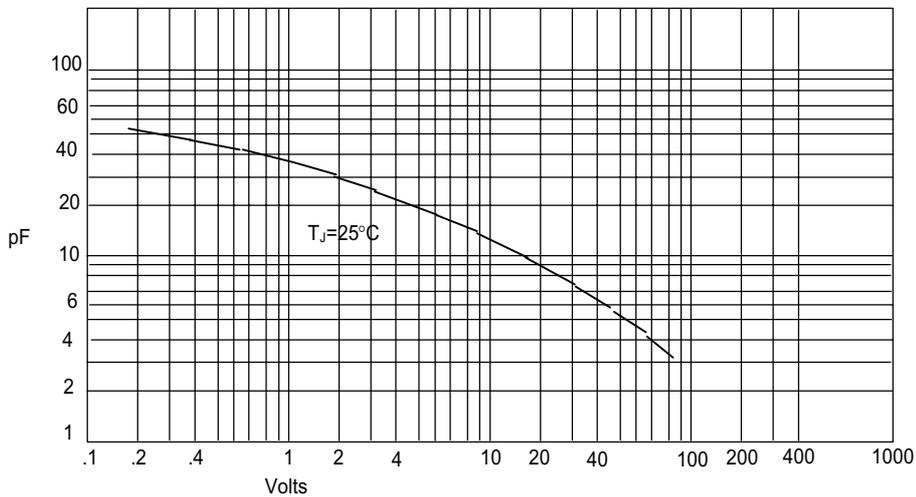

MBRX120 THRU MBRX160

Reverse Voltage 20-40 Volts Forward Current - 1.0 Ampere

Packing information

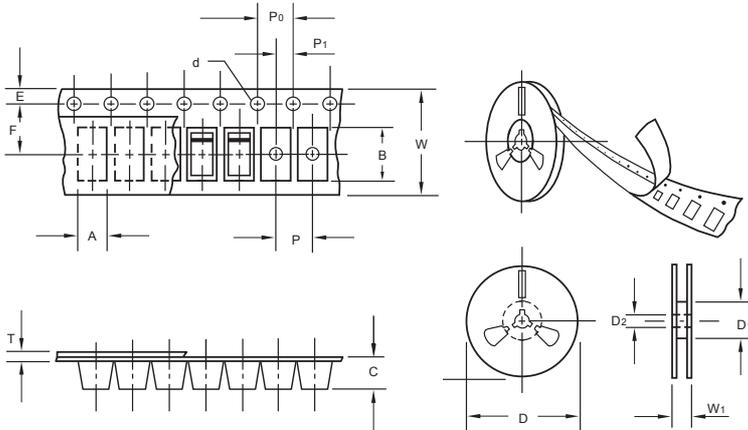

unit:mm


| Item | Symbol | Tolerance | SOD-123 |
|--------------------------|----------------|-----------|---------|
| Carrier width | A | 0.1 | 2.1 |
| Carrier length | B | 0.1 | 4.0 |
| Carrier depth | C | 0.1 | 1.60 |
| Sprocket hole | d | 0.05 | 1.55 |
| 7" Reel outside diameter | D | 2.0 | 178.00 |
| 7" Reel inner diameter | D ₁ | min | 50.0 |
| Feed hole diameter | D ₂ | 0.5 | 13.00 |
| Sprocket hole position | E | 0.1 | 1.75 |
| Punch hole position | F | 0.1 | 3.50 |
| Punch hole pitch | P | 0.1 | 4.00 |
| Sprocket hole pitch | P ₀ | 0.1 | 4.00 |
| Embossment center | P ₁ | 0.1 | 2.00 |
| Overall tape thickness | T | 0.1 | 0.25 |
| Tape width | W | 0.3 | 8.15 |
| Reel width | W ₁ | 1.0 | 10.5 |

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

| PACKAGE | REEL SIZE | REEL (pcs) | COMPONENT SPACING (m/m) | BOX (pcs) | INNER BOX (m/m) | REEL DIA, (m/m) | CARTON SIZE (m/m) | CARTON (pcs) | APPROX. GROSS WEIGHT (kg) |
|---------|-----------|------------|-------------------------|-----------|-----------------|-----------------|-------------------|--------------|---------------------------|
| SOD-123 | 7" | 3,000 | 4.0 | 45,000 | 210*208*203 | 178 | 430*430*235 | 180,000 | 9.0 |

Suggested Pad Layout

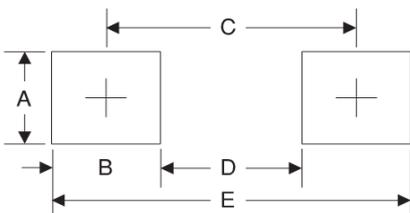

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A | 1.2 | 0.047 |
| B | 1.2 | 0.047 |
| C | 3.2 | 0.126 |
| D | 2.0 | 0.079 |
| E | 4.4 | 0.173 |