


SECTION "A-A" (2:1)

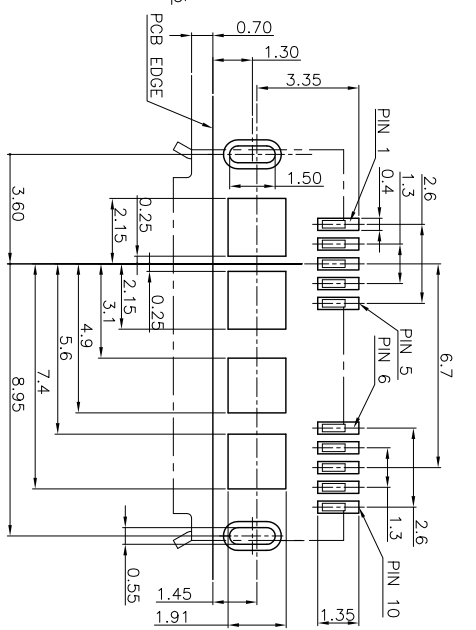

RECOMMENDED P.C.B LAYOUT

- 备注:
1. 材质:
    - 1.1 胶芯: LCP UL94V-0
    - 1.2 端子: C2680R-H, T=0.15接触区镍底, 镀半金, 焊线区镍底, 镀锡
    - 1.3 外壳: SUS304 镀镍 T=0.3
  2. 主要特性:
    - 2.1 额定电流: 1.5A
    - 2.2 接触阻抗: 30mΩ MAX
    - 2.3 绝缘阻抗: 100MΩ MIN
    - 2.4 耐压测试: 100V AC
    - 2.5 沾锡性: 温度245+/-5℃, 时间3-5S
    - 2.6 整体插入力: 3.5kgf MAX 整体拔出力: 1.00kgf MIN
    - 2.7 使用寿命: 10000次
    - 2.8 耐温性: IR炉测试: 260+/-10℃
    - 2.9 工作温度: -20℃~+60℃

产品图

深圳市精拓金电子有限公司

公差一览表		单位		制图		制图料号	
TOLERANCE UNLESS OTHERWISE:		UNITS	MM	DRAWING	审核	PRODUCT PART NO.	产品名称
X.	±0.35	X.	±5.°	比例	1:1	DATE	2016-06-23
.X	±0.30	.X	±2.°	SCALE	核准	DATE	2016-06-23
.XX	±0.20	.XX	±1.°	DATE	黄国荣	VIEW	角法
.XXX	±0.10	.XXX	±0.5°	DATE		VIEW	版本
							A0

MAPX	MODIFICATION	DATE