


ROHS

版次	修訂內容	修訂者	修訂日期

SPECIFICATIONS
 Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: PBT30%GF,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
C3030WR-2X1P	---	6.65
C3030WR-2X2P	3.00	9.65
C3030WR-2X3P	6.00	12.65
C3030WR-2X4P	9.00	15.65
C3030WR-2X5P	12.00	18.65
C3030WR-2X6P	15.00	21.65
C3030WR-2X7P	18.00	24.65
C3030WR-2X8P	21.00	27.65
C3030WR-2X9P	24.00	30.65
C3030WR-2X10P	27.00	33.65
C3030WR-2X11P	30.00	36.65
C3030WR-2X12P	33.00	39.65

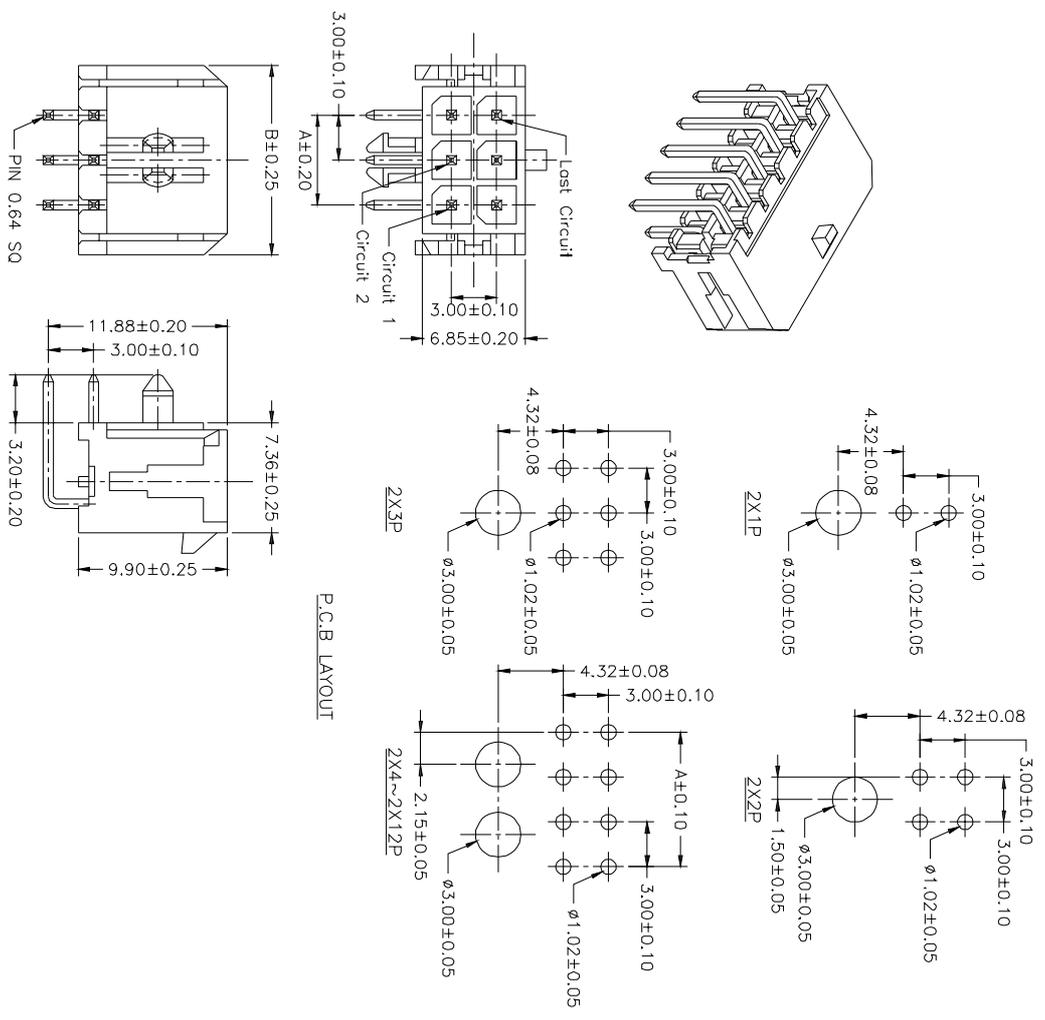

圖面編號	SP-C3030FV-CD042	圖	
一般公差	.XX0.15 .XX±0.05 ∠±1°	圖	
頁次	10F1	產	
繪圖/日期	李小艷 2008-05-04		
設計/日期			
核對/日期			

單位	mm	比例		版次	A/0
----	----	----	--	----	-----