




BU-00000- \*  
Part # color | \* 0 - Black 5 - Green  
2 - Red 6 - Blue  
4 - Yellow 9 - White

TEST LEADS

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 Page 11

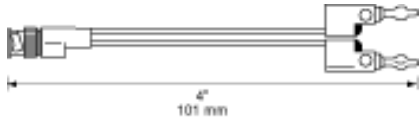

### BU-5120-A-4-0 Stackable Double Banana Plug Gold Kelvin Clip


- Tarnish-resistant, plated brass body.
- Gold-plated brass center contact.
- Hook-up wire: #20 AWG (41/36)tinned copper with 105°C PVC insulation.
- Nine-leaf beryllium copper-plated springs and copper alloy 360 bodies.
- [Product Data Sheet](#)
- [Send us your questions about this product](#)

### BU-5131-A-4-0 BNC Male Breakout Style to Insulated "Mini-Alligator" Clips

- Tarnish resistant, plated brass body; gold-plated brass center contact.
- ABS housing.
- Clips: Mueller no. 30BL with No. 31 insulators.
- Hook-up wire: #20 AWG ( 41/36) tinned copper with 105°C PVC insulation.
- [Product Data Sheet](#)
- [Send us your questions about this product](#)



Enlarge



### BU-5144-A-4-0 BNC Male Breakout Style To Stackable 0.080" (2.0 mm) Pin Plugs

- Tarnish resistant, plated brass with gold-plated brass center contact.
- ABS housing.
- Pin tip: nickel-plated brass 0.080" (2.0 mm) dia.; 0.500" (12.7 mm) long.
- Tip jack: accepts 0.080" (2.0 mm) dia. pin.
- Nickel-plated, alloy 360 copper.
- Hook-up wire: #20 AWG (41/36) tinned copper with 105° PVC insulation.
- [Product Data Sheet](#)
- [Send us your questions about this product](#)

### BU-5200-A-4-0 BNC Female Breakout Style to Tinned End Wires

- Tarnish resistant.
- Plated brass body; gold-plated brass center contact.
- ABS housing.
- Hook-up wire: #20 AWG (41/36) tinned copper with 105° PVC insulation.
- [Product Data Sheet](#)
- [Send us your questions about this product](#)



Enlarge

[Contents](#)|[Next](#)  
[Home](#)|[Insulated BNCs](#)|[Clips & Insulators](#)|[Insulated Test Accessories](#)  
[Accessories & Probes](#)|[Kits](#)|[Cross Reference](#)

©1999-2000 Mueller Electric Company. All rights reserved.  
Problems with the site should be reported to the [webmaster](#).