
# Pomona®

## Model 5423 BNC Male With Molded Strain Relief To Minipincer**â** Test Clips

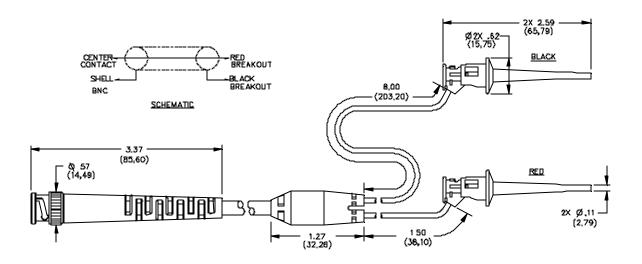

#### **FEATURES:**

• Convert a BNC Female receptacle into Minipincer® Test Clips

#### **MATERIALS:**

Conn: 1<sup>st</sup> End - Minipincer® Test Clips. Selectively gold plated Beryllium Copper contact. Insulation: Nylon
Color: One Black and one Red
Cable: RG58C/U, 5.0 (.195) O.D.; Y-Mold insulation, PVC, Black
Conn: 2<sup>nd</sup> End – Crimp BNC Male – Brass body, tarnish resistant plated.
Center Contact: Brass, gold plated
Boot: PVC, Black

Marking: "POMONA 5423"

#### **RATINGS:**

Operating Temperature: +50° (+122°F) Max. Operating Voltage: 300 VRMS Max. Current: 5 Amperes

### ORDERING INFORMATION: Model 5423-C-XX

XX= Cable Length, Standard Length: 18" (457), 24" (610), 36" (914), 48" (1219), 60" (1542) Ordering Example: 5423-C-60 indicates 60" in length.

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm.02$ " (,51 mm),  $.xxx = \pm.005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99	Sales: 800-490-2361	Fax: 888-403-3360
SY/EH/LS	Technical Assistan	ice: 800-241-2060
C:\Laura Goldberg\FlukeDataSheet\d5423_1_01.doc		