


# SURFACE MOUNT (SMT) & THRU HOLE (THM) BUTTON CELL RETAINERS

Economical and reliable SMT and THM coin cell retainers specifically designed for miniature electronic applications with limited board space.


- Available in Thru Hole Mount (THM) or Surface Mount (SMT) configurations
- Retains battery securely to withstand shock and vibration
- THM legs maintain relative position during and after soldering
- Ideally suited for High Density packaging
- Reliable spring tension assures low contact resistance
- SMT solder tail with "flow-hole" design for increased joint strength
- Solder tail located outside of retainer body which facilitates visual inspection of the solder joints

4.8mm to 10mm BUTTON CELL RETAINERS



Surface Mount

AVAILABLE ON TAPE AND REEL




4.8mm

MATERIAL: .006 (.15) Phosphor Bronze, Gold Plate (Flash)

CAT. NO. BULK	ON TAPE & REEL	BATTERY REFERENCE
2994	2994TR	ML414

Tape & Reel Spec's: 16mm wide; 8mm pitch; 13 inch reel (1500 pieces per reel)




MATERIAL: .006 (.15) Phosphor Bronze, Tin-Nickel Plate

CAT. NO.	BATTERY REFERENCE
2995	ML414




Thru Hole Mount

Mounting Detail



Surface Mount

AVAILABLE ON TAPE AND REEL




5.8mm

MATERIAL: .006 (.15) Phosphor Bronze, Tin-Nickel Plate

CAT. NO. BULK	ON TAPE & REEL	BATTERY REFERENCE
2986	2986TR	379, 317

Tape & Reel Spec's: 16mm wide; 8mm pitch; 13 inch reel (1500 pieces per reel)




MATERIAL: .006 (.15) Phosphor Bronze, Tin-Nickel Plate

CAT. NO.	BATTERY REFERENCE
2987	379, 317




Thru Hole Mount

Mounting Detail



Surface Mount

AVAILABLE ON TAPE AND REEL




6.8mm

MATERIAL: .010 (.25) Phosphor Bronze

CAT. NO. BULK	ON TAPE & REEL	FINISH	BATTERY REFERENCE
2998	2998TR	Tin-Nickel	MC621, V364, SC621, DR13H, DR77, V13AT, 377
3098	3098TR	Matte Tin	

Tape & Reel Spec's: 24mm wide; 12mm pitch; 13 inch reel (1000 pieces per reel)




MATERIAL: .010 (.25) Phosphor Bronze, Tin-Nickel Plate

CAT. NO.	BATTERY REFERENCE
2999	MC621, V364, SC621, DR13H, DR77, V13AT, 377




Thru Hole Mount

Mounting Detail



Surface Mount

AVAILABLE ON TAPE AND REEL




7.9mm

MATERIAL: .010 (.25) Phosphor Bronze, Gold Plate (Flash)

CAT. NO. BULK	ON TAPE & REEL	BATTERY REFERENCE
2988	2988TR	Size 13, DA13, AZ13E, 393, SR754, SR48

Tape & Reel Spec's: 24mm wide; 12mm pitch; 13 inch reel (800 pieces per reel)




MATERIAL: .010 (.25) Phosphor Bronze, Tin-Nickel Plate

CAT. NO.	BATTERY REFERENCE
2989	Size 13, DA13, AZ13E, 393, SR754, SR48




Thru Hole Mount

Mounting Detail



Surface Mount

AVAILABLE ON TAPE AND REEL




9 - 10mm

MATERIAL: .006 (.15) Phosphor Bronze, Tin-Nickel Plate

CAT. NO. BULK	ON TAPE & REEL	FINISH	BATTERY REFERENCE
3030	3030TR	Tin-Nickel	CR927, CR1025
3050	3050TR	Matte Tin	

Tape & Reel Spec's: 24mm wide; 12mm pitch; 13 inch reel (1500 pieces per reel)




MATERIAL: .006 (.15) Phosphor Bronze, Tin-Nickel Plate

CAT. NO.	BATTERY REFERENCE
3031	CR927, CR1025



Thru Hole Mount


Mounting Detail



# LOCKING COIN CELL RETAINERS

- Coin cell is secured even in shock & vibration applications
- Battery can be removed without use of tools


- Compatible with all wave and reflow soldering processes
- Tin-Nickel plating is ideal for High temperature, lead free, soldering

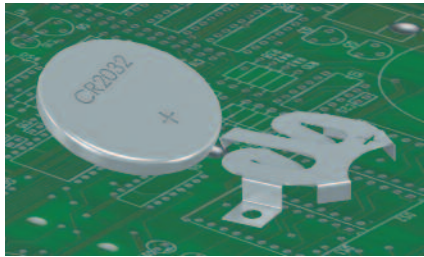

### Toolless Battery installation:

1. Tilt battery so that top edge of battery will slide under retaining tab.
2. Level battery and slide into retainer until retaining tab snaps over battery.

**SMT**



### Locking Retainer:

Battery will stay retained even in severe shock applications such as hand held devices. Battery can be removed by lifting retaining tab and pushing battery from back end of retainer.

**THM**



- Flow hole solder tail designed for increased joint strength
- Compatible with most vacuum and mechanical pick and place assembly systems
- All conductive polystyrene carrier tape meets ANSI/EIA-481 standard

- Snap-In legs will maintain positioning prior and during soldering
- Compatible with wave solder application

**MATERIAL:** .010 (.25) Phosphor Bronze, Tin-Nickel Plate



Surface Mount

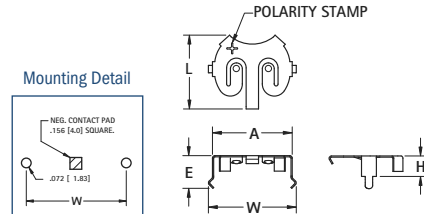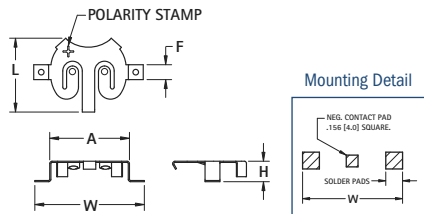

Thru Hole Mount

**AVAILABLE ON TAPE AND REEL**

Surface Mount									Thru Hole Mount	
CAT. NO.	ON TAPE & REEL	A	H	L	W	CELL DIA.	BATTERY REFERENCE	CAT. NO.	BULK	
2894	2984TR	.520 (13.2)	.106 (2.7)	.494 (12.5)	.700 (17.8)	12mm	CR1220	2895		
2896	2986TR	.670 (17.0)	.171 (4.3)	.620 (15.8)	.920 (23.4)	16mm	BR1632	2897		
2898	2988TR	.830 (21.1)	.171 (4.3)	.771 (19.6)	1.210 (30.7)	20mm	CR2032	2899		

## SURFACE MOUNT (SMT) & THRU-HOLE (THM) INSULATED RETAINERS




Surface Mount



**20mm CELLS**

- Ideal for 6 volt or 3 volt applications
- Two coin cell batteries can be installed in series
- Plastic insulator prevents shorting of battery, within the holder, when installed improperly
- Low profile
- Battery release ports for easy battery replacement
- Refer to pages 8 & 11 for a complete offering of coin cell retainers

**MATERIAL:** Contacts: .010 (.25) Phosphor Bronze Insulator: High Temperature, Nylon 46, UL Rated 94V-0



Thru Hole Mount

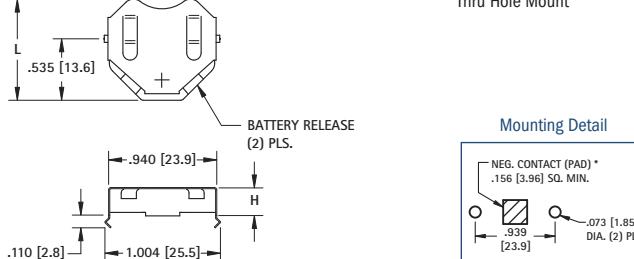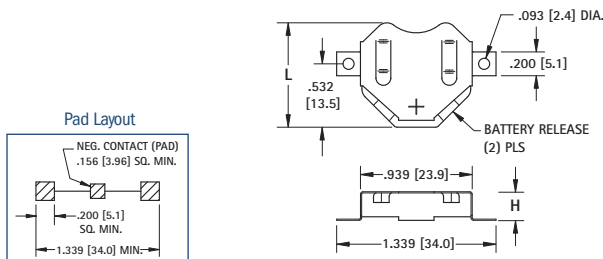

**AVAILABLE ON TAPE AND REEL**

Surface Mount						BATTERY REFERENCE				Thru Hole Mount	
Tin-Nickel Plate			Matte Tin Plate			6 VOLT (2) CELLS		3 VOLT (1) CELL		Tin-Nickel Plate	
CAT. NO.	CAT. NO.	ON TAPE & REEL	CAT. NO.	CAT. NO.	ON TAPE & REEL	L	H	L	H	CAT. NO.	CAT. NO.
3020-2	3020	3020TR	3070-2	3070	3070TR	.890 (22.6)	.156 (4.0)	2012, 2016	2020, 2025	.890 (22.6)	.156 (4.0)
3022-2	3022	3022TR	3072-2	3072	3072TR	.877 (22.3)	.240 (6.1)	2020, 2025	2032	.877 (22.3)	.240 (6.1)
3024-2	3024	3024TR	3074-2	3074	3074TR	.877 (22.3)	.295 (7.5)	2032	Not Applicable	.877 (22.3)	.295 (7.5)

\* Supplied Unassembled

**Tape & Reel Specs:** 56mm wide; 28mm pitch; 13 inch reel: **3020TR, 3070TR** 400 pieces per reel; **3022TR, 3072TR** 250 pieces per reel; **3024TR, 3074TR** 250 pieces per reel

Tel (516) 328-7500 • Fax (516) 328-1080  
(800) 221-5510 • [kec@keyelco.com](mailto:kec@keyelco.com)

**KEYSTONE**  
RoHS COMPLIANT ~ ISO 9001 CERTIFIED

[www.keyelco.com](http://www.keyelco.com)  
55 S. Denton Avenue, New Hyde Park, NY 11040


12mm to 20mm COIN CELL RETAINERS

# THRU HOLE (THM) COIN CELL RETAINERS



11.6mm to 30mm COIN CELL RETAINERS




- Snap-In legs maintain relative positioning prior and during soldering
- Compatible with wave soldering processes
- Thru hole solder legs provides excellent mechanical strength
- Lowest profile mounting as compared to coin cell holders
- Economical design allows for PCB pads to be used as negative contacts
- Tin Nickel plating provides low contact resistance and will hold up to high temperature lead free soldering
- Battery can be easily replaced without any tools

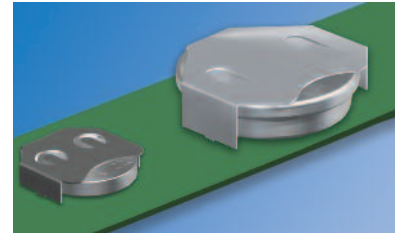


**MATERIAL:** .010 (.25) Phosphor Bronze, Tin-Nickel Plate



**FIG. 1 - Compact**



**FIG. 2 - Low Profile**



CAT. NO.	FIG.	A	H	L	W	CELL DIA.	BATTERY REFERENCE
<b>2997</b>	2	.520 (13.2)	.235 (6.0)	.475 (12.1)	.585 (14.9)	11.6mm	SR43, 186, 386, A76, LR44, 357, MS76, PX76A, G-13, 303, V313
<b>3001</b>	2	.520 (13.2)	.118 (3.0)	.475 (12.1)	.585 (14.9)	12mm	CR1216, BR1220, CL1225, SR1120, D381, 391, 191
<b>3013</b>	2	.664 (16.9)	.156 (4.0)	.594 (15.1)	.723 (18.4)	16mm	BR1616, CR1612, CR1616, CR1620, CR1632
<b>3027</b>	1	.831 (21.1)	.085 (2.2)	.782 (19.9)	.890 (22.6)	20mm	BR2016, CR2016, DL2016
<b>3003</b>	2	.831 (21.1)	.156 (4.0)	.782 (19.9)	.890 (22.6)	20mm	BR2320, CL2330, CR2320, BR2325, CR2325, DL2325
<b>3005</b>	2	.939 (23.9)	.156 (4.0)	.832 (21.1)	1.004 (25.5)	23mm	BR2320, CL2330, CR2320, BR2325, CR2325, DL2325
<b>3011</b>	2	.939 (23.9)	.240 (6.1)	.819 (20.8)	1.004 (25.5)	23mm	CR2354, DL2354
<b>3007</b>	1	1.000 (25.4)	.156 (4.0)	.918 (23.3)	1.055 (26.8)	24mm	CR2430, DL2430
<b>3009</b>	2	1.000 (25.4)	.230 (5.8)	.890 (22.6)	1.059 (26.9)	24mm	CR2450, DL2450
<b>3039</b>	2	1.000 (25.4)	.336 (8.5)	.890 (22.6)	1.059 (26.9)	24mm	CR2477, DL2477
<b>3047</b>	2	1.227 (31.2)	.167 (4.2)	1.020 (25.9)	1.340 (34.0)	30mm	CR3032



## THRU HOLE (THM) ULTRA LOW PROFILE COIN CELL RETAINER



The Ultra Low Profile Coin Cell retainers are designed specifically for the most popular 20mm & 24mm coin cells. It will provide reliable contact as well as retain the coin cell with the minimum space needed. Ideal for small applications such as remote controls or active RFID tags.

- Slim design - saves valuable board space
- Narrow face allows for quick and easy battery replacement
- Designed for specific batteries - lowest height design

**MATERIAL:** .010 (.25) Phosphor Bronze, Tin-Nickel Plate

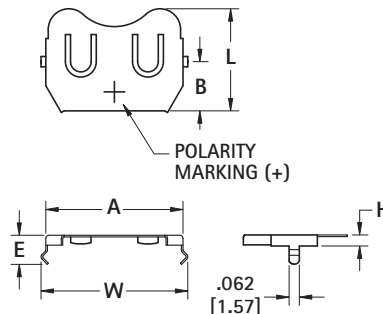

CAT. NO.	A	H	L	W	CELL DIA.	BATTERY REFERENCE
<b>3029</b>	.831 (21.1)	.067 (1.7)	.618 (15.7)	.890 (22.6)	20mm	CR2012, DL2012
<b>3035*</b>	.835 (21.2)	.170 (4.3)	.600 (15.2)	.880 (22.3)	20mm	CR2032 also CR2025, CR2020
<b>3033</b>	1.000 (25.4)	.067 (1.7)	.681 (17.3)	1.055 (26.8)	24mm	CR2412, BR2412

\* Nickel Plate

# SURFACE MOUNT (SMT) COIN CELL RETAINERS

- Compatible with reflow soldering processes
- Solder tails located outside of retainer which facilitates visual inspection of solder joint
- Compatible with most vacuum and mechanical pick & place assembly system
- All conductive carrier tape meets ANSA/EIA-481 standards
- Economical design allows for PCB pads to be used as negative contacts
- Matte Tin Plate for lower soldering temperatures. Ideal when other temperature sensitive components are being used



- Tin Nickel plating provides low contact resistance and will hold up to high temperature lead free soldering
- Dual spring contact assures battery will have proper contact with PCB
- Battery can be easily replaced without any tools

## SURFACE MOUNT (SMT)


### AVAILABLE ON TAPE AND REEL

- All conductive polystyrene carrier tape meets ANSI/EIA-481 standards


**MATERIAL:** .010 (.25) Phosphor Bronze




**FIG. 1 - Compact**



\*SMT negative contact pads not recommended for compact retainers.



\*Negative pad can be replaced with SMT negative contact. See page 12.

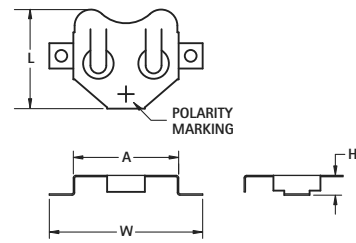

**FIG. 2 - Low Profile**

TIN-NICKEL PLATE		MATTE TIN PLATE		FIG.	A	H	L	W	CELL DIA.	BATTERY REFERENCE	TAPE & REEL SPEC'S
CAT. NO. BULK	ON TAPE & REEL	CAT. NO. BULK	ON TAPE & REEL								
2996	2996TR	3096	3096TR	2	.520 (13.2)	.235 (6.0)	.475 (12.1)	.700 (17.8)	11.6mm	SR43, 186, 386, A76, LR44, 357, MS76, PX76A, G-13, 303, V313	32mm wide; 16mm pitch; 600/reel
3000	3000TR	3080	3080TR	2	.520 (13.2)	.125 (3.2)	.475 (12.1)	.745 (18.9)	12mm	CR1216, BR1220, CL1225, SR1120, D381, 391, 191	32mm wide; 16mm pitch; 1000/reel
3012	3012TR	3092	3092TR	2	.664 (16.9)	.156 (4.0)	.594 (15.1)	.914 (23.2)	16mm	BR1612, CR1616, CR1620, DL1632	44mm wide; 24mm pitch; 600/reel
3026	3026TR	3078	3078TR	1	.831 (21.1)	.085 (2.2)	.782 (19.9)	1.210 (30.7)	20mm	BR2016, CR2016, DL2016	44mm wide; 24mm pitch; 1000/reel
3002	3002TR	3082	3082TR	2	.831 (21.1)	.156 (4.0)	.782 (19.9)	1.210 (30.7)	20mm	BR2016, DL2020, CR2025, CR2032	44mm wide; 24mm pitch; 500/reel
3004	3004TR	3084	3084TR	2	.939 (23.9)	.156 (4.0)	.832 (21.1)	1.339 (34.0)	23mm	BR2320, CL2325, CR2330, DL2335	56mm wide; 32mm pitch; 400/reel
3010	3010TR	3090	3090TR	2	.939 (23.9)	.240 (6.1)	.819 (20.8)	1.339 (34.0)	23mm	CR2354, DL2354	56mm wide; 32mm pitch; 200/reel
3006	3006TR	3086	3086TR	1	1.000 (25.4)	.156 (4.0)	.918 (23.3)	1.400 (35.6)	24mm	CR2430, DL2430	56mm wide; 32mm pitch; 400/reel
3008	3008TR	3088	3088TR	2	1.000 (25.4)	.230 (5.8)	.890 (22.6)	1.400 (35.6)	24mm	CR2450, DL2450	56mm wide; 32mm pitch; 200/reel
3046	3046TR	—	—	2	1.227 (14.3)	.167 (4.2)	1.020 (25.9)	1.627 (41.3)	30mm	CR3032	56mm wide; 32mm pitch; 400/reel

## SURFACE MOUNT (SMT) ULTRA LOW PROFILE COIN CELL RETAINER




### AVAILABLE ON TAPE AND REEL


Ultra Low Profile Coin Cell Retainers are designed specifically for the most popular coin cells. It will provide reliable contact as well as retain the coin cell with the minimum space needed. Ideal for small applications such as remote controls or active RFID tags.

- Slim design - saves valuable board space
- Narrow face allows for quick and easy battery replacement
- Designed for specific batteries - lowest height design

**MATERIAL:** .010 (.25) Phosphor Bronze, Tin-Nickel Plate



**FIG. 3 - Ultra Low**



\*SMT negative contact pads not recommended for Ultra Low Profile retainers.

TIN-NICKEL PLATE		MATTE TIN PLATE		FIG.	A	H	L	W	CELL DIA.	BATTERY REFERENCE	TAPE & REEL SPEC'S
CAT. NO. BULK	ON TAPE & REEL	CAT. NO. BULK	ON TAPE & REEL								
3028	3028TR	3038	3038TR	3	.831 (21.1)	.067 (1.7)	.618 (15.7)	.911 (23.1)	20mm	BR2012, CR2012, DL2012	44mm wide; 24mm pitch; 1000/reel
3034*	3034TR*	3044*	3044TR*	3	.835 (21.2)	.160 (4.1)	.635 (16.1)	0.915 (23.1)	20mm	BR2016, DL2020, CR2025, CR2032	44mm wide; 24mm pitch; 1000/reel
3032	3032TR	3042	3042TR	3	1.000 (25.4)	.067 (1.7)	.681 (17.3)	1.080 (27.4)	24mm	BR2412, CR2412	44mm wide, 24mm pitch, 1000/reel

\*Nickel Plate

Tel (516) 328-7500 • Fax (516) 328-1080  
(800) 221-5510 • kec@keyelco.com

**KEYSTONE**  
RoHS COMPLIANT ~ ISO 9001 CERTIFIED

www.keyelco.com  
55 S. Denton Avenue, New Hyde Park, NY 11040

11.6mm to 30mm COIN CELL RETAINERS

# SURFACE MOUNT (SMT) COIN CELL ENCLOSURE CONTACTS


- Contacts for Enclosure cases with self contained battery compartments
- Design facilitates easy battery access, removal & installation

- Suitable for industrial and consumer product applications
- Spring contacts adjust to variations in battery diameter for a dependable connection



- Positive and Negative contacts can be used as a design pair or individually on a PCB
- Accommodates cell diameters from 12mm to 30mm

AVAILABLE ON TAPE AND REEL

MATERIAL: .006 (.15) Stainless Steel, Gold Plate (Flash)

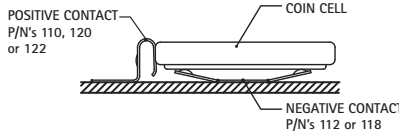

Refer to page 38 for Mounting Details

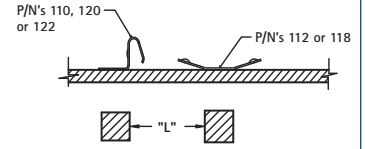


## CONTACT SELECTION GUIDE

BATTERY DIAMETER	BATTERY REFERENCE	CAT. NO. REFERENCE	MOUNTING DETAIL
Accommodates 12mm to 16mm	CR1212, CR1216, CR1220, CR1612, CR1616, CR1620	120 (Pos) & 118 (Neg)	See page 38
	CR1225, CR1625, CR1632	110 (Pos) & 118 (Neg)	See page 38
Accommodates 20mm to 30mm	CR2012, CR2016, CR2020, CR2320, CR2412	120 (Pos) & 112 (Neg)	See page 38
	CR2025, CR2032, CR2325, CR2330, CR2430, CR3032	110 (Pos) & 112 (Neg)	See page 38
	CR2050, CR2335, CR2354, CR2430, CR2440, CR2450, CR2477, CR3048	122 (Pos) & 112 (Neg)	See page 38

12mm to 30mm COIN CELL CONTACTS


### POSITIVE

**LOW BATTERY HEIGHT**  
1.2mm to 2.0mm




**CAT. NO. 120** Bulk  
**CAT. NO. 120TR** Tape & Reel  
Tape & Reel Spec's: 16mm wide, 8mm pitch, 13 inch reel, 3000 pieces per reel

**MEDIUM BATTERY HEIGHT**  
2.0mm to 3.2mm



**CAT. NO. 110** Bulk  
**CAT. NO. 110TR** Tape & Reel  
Tape & Reel Spec's: 16mm wide, 8mm pitch, 13 inch reel, 2000 pieces per reel


**TALL BATTERY HEIGHT**  
3.5mm to 7.7mm



**CAT. NO. 122** Bulk  
**CAT. NO. 122TR** Tape & Reel  
Tape & Reel Spec's: 16mm wide, 8mm pitch, 13 inch reel, 1000 pieces per reel


### NEGATIVE

**BATTERY DIAMETER**  
12mm to 16mm



**CAT. NO. 118** Bulk  
**CAT. NO. 118TR** Tape & Reel  
Tape & Reel Spec's: 24mm wide, 8mm pitch, 13 inch reel, 5000 pieces per reel

**BATTERY DIAMETER**  
20mm to 30mm



**CAT. NO. 112** Bulk  
**CAT. NO. 112TR** Tape & Reel  
Tape & Reel Spec's: 24mm wide, 8mm pitch, 13 inch reel, 5000 pieces per reel


# SURFACE MOUNT (SMT) & THRU-HOLE (THM) NEGATIVE BATTERY CONTACTS

AVAILABLE ON TAPE AND REEL



### SMT COMPACT\*

- Assures proper contact




DWG. 1 MATERIAL: .008 (.20) Brass



### SMT SPRING CONTACT\*

- Assures proper contact




DWG. 2 MATERIAL: .010 (.25) Phospher Bronze




### THM SNAP IN\*

- Assures proper contact



MATERIAL: .008 (.20) Phosphor Bronze, Tin-Nickel Plate

Mounting Detail



**CAT. NO. 2990**

TIN-NICKEL PLATE		MATTE TIN PLATE		DWG.	L	DIA.	TAPE & REEL SPECS
CAT. NO. BULK	ON TAPE & REEL	CAT. NO. BULK	ON TAPE & REEL				
2991	2991TR	2981	2981TR	1	.368 (9.4)	.250 (6.4)	16mm wide, 8mm pitch, 1500/7 reel
2992	2992TR	2982	2982TR	1	.289 (7.4)	.186 (4.7)	16mm wide, 12mm pitch, 1000/7 reel
2993	2993TR	2983	2983TR	2	.625 (15.9)	-	24mm wide, 16mm pitch, 1000/13 reel

\*Note: Cannot be used with Cat. No. 3028, 3029, 3032, 3038, 3042, 3026, 3078.