

You are here: Products » Connectors f.con » PCB connectors » Male headers » SL LP 6 SMD ... »  

- ▶ Heatsinks f.cool
- ▶ Cases f.case
- ▼ **Connectors f.con**
 - ▶ Sockets
 - ▼ PCB connectors
 - **Male headers**
 - Female headers
 - Direct female connectors
 - Jumpers
 - ▶ IDC-connectors
 - ▶ D-Sub connectors
 - Brackets for PC
 - ▶ Optoelectronics

Male headers


SL LP 6 SMD ...

SL LP 6 SMD 066 10 G B SM

□ 0.635 mm, low profile

[Data sheet](#)

[add to request](#)

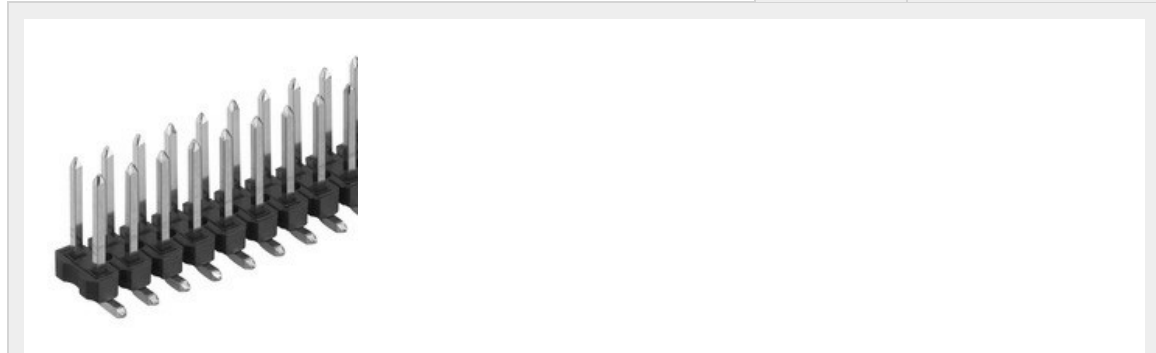

- Features
- Technical Drawing
- Equipping
- Variants
- Service
- Accessories / related products

grid	2.54 mm
no. of contacts	10
contact material	CuSn alloy
surface of contact	gold-plated
surface contact / contact sleeve	Ni+≥0.2µm Au
version	male header
volume resistance	≤5 mΩ
nominal current	3 A
nominal voltage	250 V AC
test voltage	2000 V
insulating body material	PA 4.6. GF
temperature range	-40°C... +163°C (260°C/10 s)
class of inflammability	UL 94 V-0
specific insulation resistance	>10.0 ⁷⁰ Ω·m
connection type	SMD
positioning	locating pin (2 pcs/bar bigger than 6 contacts)
reflow solderable	yes
packing	pick and place pad and bar magazine